

The Corporation of the Town of The Blue Mountains

By-Law Number 2022 – 74

Being a By-law to provide for the maintenance and extension of the Blue Mountain Outlet Diversion Drain and Ford Outlet Drain in the Town of the Blue Mountains.

Whereas the Council of the Town of the Blue Mountains in accordance with the provisions of the Drainage Act has received a request for the maintenance and extension of the Blue Mountain Outlet Diversion Drain and Ford Outlet Drain in the Town of the Blue Mountains.

And Whereas the Council of the Town of the Blue Mountains has procured an engineer's report prepared by WT Infrastructure Solutions Incorporated, dated March 7, 2022 (the "engineer's report"), and the engineer's report is attached to and forms part of this By-law;

And Whereas the Council of the Town of the Blue Mountains is of the opinion that the maintenance and extension of the drainage works is desirable;

Now Therefore Council of The Corporation of the Town of The Blue Mountains under the Drainage Act hereby enacts as follows:


1. That the engineer's report is hereby adopted, and the maintenance and extension of the drainage work as therein indicated and set forth are hereby authorized and shall be completed in accordance therewith.
2. That the costs of the extension of the drainage works as set forth in the engineer's report, including any necessary permits and/or approvals from Grey Sauble Conservation Authority and/or the Ontario Ministry of Transportation, shall be borne entirely by the petitioners, Parkbridge Lifestyle Communities Inc., MacPherson Builders (Blue Mountains) Limited, and Eden Oak (Trailshead) Inc.
3. That the implementation of the works will be through a fully secured agreement prepared by the Town's solicitor.

READ A FIRST AND SECOND TIME AND PROVISIONALLY ADOPTED THIS 11TH day of October, 2022.

And Further that this By-law shall come into force and take effect upon the enactment thereof.

Enacted and passed this 11 day of October, 2022


Alar Soever, Mayor


Corrina Giles, Town Clerk



DRAFT REPORT

REGIONAL STORMWATER MANAGEMENT PLAN – BLUE MOUNTAIN DIVERSION DRAIN – DRAINAGE ACT ASSESSMENT REPORT

21-2014.03
June 6, 2022

REPORT SNAPSHOT

Project Snapshot is a WT Infrastructure Solutions Inc. initiative to communicate the five to ten key pieces of information that are important for the reader to take away from the report. It is not intended to replace a comprehensive review of the report.

- A valid petition was presented to Town of the Blue Mountains in order to allow for Municipal Drainage works to be developed to address the outlet capacity of water from areas contributing to the Blue Mountain, Blue Mountain Diversion and Ford Municipal Drains.
- The proposed works consist of two open drains to divert excess flows from the existing Blue Mountain Drain and Ford Drain outlets to the Blue Mountain Diversion Drain Outlet. The addition of these flows requires an increase in drain capacity crossing Lakeshore Road, the Georgian Trail and Highway 26.
- The estimated cost of the proposed works is \$1.26 million plus HST and this cost has been assessed to the impacted landowners, Ministry of Transportation and Town of the Blue Mountains in accordance with the Drainage Act provisions. The petitioning landowners have indicated that they will pay for the costs of all impacted landowners.
- Subject to Town of the Blue Mountains Council procedure and the requirements of the Drainage Act, this report will be considered at Council followed by a provisional by-law and Court of Revision opportunity prior to enacting a by-law for construction, which will allow the project to proceed to final design, approvals and construction. This is anticipated in the fall of 2022.



June 6, 2022

Town of the Blue Mountains
32 Mill Street, P.O. Box 310
Thornbury, ON, N0H 2P0


Re: Draft Report
REGIONAL STORMWATER MANAGEMENT PLAN - BLUE MOUNTAIN DIVERSION
DRAIN – DRAINAGE ACT ASSESSMENT REPORT
21-2014.03 | VERSION 2


WT Infrastructure Solutions Incorporated (WT) is pleased to submit the following report for the Blue Mountain Diversion Drain – Drainage Act Assessment Report.

In accordance with the project schedule, we have allowed for ten (10) days for client review and comments. Please let us know if you need additional time or have any questions regarding this document. We look forward to your comments and the opportunity to advance this project to completion.

Respectfully submitted,

WT INFRASTRUCTURE SOLUTIONS INCORPORATED

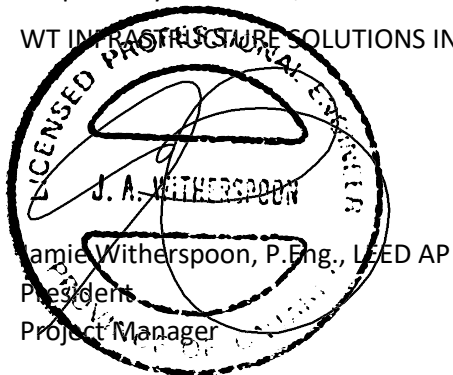


17-370 Stone Road West,
PO Box 25002, Stone Road PO
Guelph, ON, N1G 4T4


jamie.witherspoon@
wtinfrastructure.ca


519.400.6701


@solutions_wt

TABLE OF CONTENTS

COVER LETTER

TABLE OF CONTENTS

1	INTRODUCTION	1
1.1	Background	1
1.2	Scope Of Work	1
1.3	Reference Material	1
2	MUNICIPAL DRAINAGE ACT.....	2
2.1	Municipal Drainage Act Process.....	2
2.2	Petition.....	4
2.3	Site Meeting.....	4
2.4	Area Requiring Drainage	5
2.5	Physiography and Soils.....	7
2.6	Drainage History	8
2.7	Existing Conditions.....	10
2.8	Proposed Works.....	11
2.9	Drawings and Specifications	12
2.10	Impact on other Municipal Drains	12
2.11	Allowances	12
2.12	Cost Estimate	12
2.13	Assessment	14
2.14	Special Benefit Assessment	14
2.15	Maintenance	15

LIST OF TABLES

Table 2-1 - Drainage area of each Watercourse	8
Table 2-2: Schedule of Allowances	12
Table 2-3: Overall Project Cost Estimate	12
Table 2-4: Highway 26 Special Benefit Estimate.....	14
Table 2-5: Lakeshore Road Special Benefit Estimate.....	15

Table 2-6: Georgian Trail Special Benefit Estimate.....	15
---	----

LIST OF FIGURES

Figure 2-1: Area Requiring Drainage.....	6
--	---

Figure 2-2: Area Contributing to Outlets	7
--	---

APPENDICES

- A** Schedule A - Assessments
- B** Regional Stormwater Management Plan Watercourse 7, 8, 9 & 10 – Craigleith Residential Development – (Draft) April 2018, C.F. Crozier & Associates Inc.
- C** Craigleith Residential Development – Regional Spill Management Letter – February 8, 2019, C.F. Crozier & Associates Inc.
- D** Regional SWM Solution – November 24, 2021, C.F. Crozier & Associates Inc.
- E** Watercourse 7,8,9 – Regional SWM Proposed Works 0 - Figure 1B – January 17, 2020, C.F. Crozier & Associates Inc.

1 INTRODUCTION

1.1 Background

As part of the development of the Craigleith area, there is a desire to address the drainage at the base of the mountain. As indicated, in the background information, the intent is to define the watercourse(s) as a municipal drain under the Municipal Drainage Act.

Existing flooding conditions of the local watercourses and the analysis of possible flooding mitigation options was completed by Crozier Consulting Engineers. The requested works reported by Crozier Consulting Engineers are as follow:

- Changing the alignment of the drainage works.
- Constructing/reconstructing or extending bridges or culverts.
- Constructing/reconstructing or extending embankments, walls, dikes, dams, reservoirs, pumping stations or other protective works in connection with the drainage works.
- Additional improvements/alterations of the drainage work including extending the drainage to an outlet.

The aforementioned requisition was brought forward by three developers who will be paying all of the costs and the cost apportionment component of the Drainage Act would not apply; however, if there are other landowners that benefit from the works, they may be assessed for benefit, outlet, injuring liability, or special benefit.

The drainage design completed by Crozier has been the subject of a Peer Review by WT Infrastructure and verified by a review as part of the Townwide Master Drainage Plan EA.

1.2 Scope Of Work

We have developed the following scope of work to achieve the project objective:

TASK 1: PROJECT INITIATION AND BACKGROUND REVIEW

- Kick-off meeting with Town Staff.
- Review of background information.

TASK 2: PEER REVIEW OF DRAINAGE STRATEGY

- Complete a detailed review of the existing reporting on the drainage design.
- Preparation of a peer review report indicating areas of compliance and areas of potential concern (as identified).

This is addressed in a separate report

TASK 3: DRAINAGE ACT COMPLIANCE

- Preparation of the Engineer's Report or opinion as mandated by the Act.
- Facilitation of the Drainage Act process (onsite meeting, filing of report, court of revision attendance, etc.)
- Finalization of the Engineer's duty under the legislation.

1.3 Reference Material

The reference material used for the development of the study included:

- Regional Stormwater Management Plan Watercourse 7, 8, 9 & 10 – Draft Report, C.F. Crozier & Associates Inc – April 2018

- Regional Spill Management Letter (February 2019)
- Regional SWM Proposed Solution Design Brief (November 2021)
- Figure summarizing municipal drain locations
- Request for Drainage Improvements Letter (June 2021)
- Existing and Proposed Flow Flowcharts (Figures 4&5)
- Figure 1A – Areas of Proposed Works
- Figure 1B – Regional SWM Proposed Works
- Watercourse 8 Plan & Profile
- Planning Report, Eden Oak - Indian Valley Draft Plan of Subdivision - April 2012
- Soil Survey of Grey County, J.E. Gillespie, and N.R. Richards – January 1954
- GIS Data – Town of Blue Mountains

2 MUNICIPAL DRAINAGE ACT

2.1 Municipal Drainage Act Process

The Municipal Drainage Act is intended to provide a legal avenue for agricultural land to be drained to a sufficient outlet that equitably shares the costs of the drainage works between those that benefit from the works including compensation for those impacted by the works.

The legislation is enforced at the municipal level of government.

The key components of the act is the process that allows for input into the works to be completed so that the works completed are designed in a manner to provide the maximum benefit for all involved.

The Order of Procedure for the Municipal Drainage Act is as follows:

1. Owner desiring drainage works circulates petition and obtains a majority of the names of other owners in the area requiring drainage, or the names of owners holding 60% of the acreage in the area requiring drainage. (To be a valid petition, the area described by lot and concession should be a true drainage basin). 4(1)
2. Owner presents signed petition to council. 4(1)
3. Council considers the petition and within 30 days, sends copies of its decision to the petitioners. 5(1)
4. If the Council decides not to accept the petition, any petitioner can appeal the decision to the Tribunal. 5(2), 99. Note: An appeal to the Tribunal concerning any section of this Act is implemented by notifying, in writing, the clerk of the initiating municipality. 99. Legal assistance is not required.
5. If Council decides to proceed, they must appoint an Engineer within 60 days of reaching the decision. 8(1), 8(3)
6. Council may instruct the Engineer to prepare a preliminary report. 10(1)
7. If an environmental appraisal is required, the Council must instruct the Engineer to prepare a preliminary report. 10(1)
8. Engineer calls on-site meeting. 9(1)
9. Engineer prepares a report and files with the Clerk within six months, or as extended. 39(1)

10. Council should pass a resolution that they intend to proceed. 41(1)
11. If Council decides not to proceed, any petitioner can appeal to the Tribunal. 45(2), 99
12. Council sends copies of report, and notice of meeting to consider report, to owners within the municipality who are subject to assessment or compensation, other clerks, conservation authority, railways, road authorities, public utilities, the Ministry of Natural Resources and the Director. 41(1).
13. Other clerks send notice to assessed or compensated owners in their municipality. 41(2)
14. Council of the initiating municipality considers report at meeting held not less than 10 days after the notices have been sent. 42 and 41(3)
15. Owners in the area requiring drainage may add or strike their names from the petition. 42
16. Council may adopt report, by provisional by-law if petition still has sufficient signatures. 44
17. If Council does not adopt the report, any petitioner can appeal to the Tribunal. 45(2), 99
18. Council within 5 days of adopting the report, to send a copy of the provisional by-law and the date of the Court of Revision to local municipalities. 46(1)
19. All Councils, within 30 days of the adoption of the report, to send a copy of the provisional by-law and the date of the Court of Revision to assessed or compensated owners. 46(2)
20. The Court of Revision is held by the initiating municipality not sooner than 20, nor later than 30 days from the date of mailing the by-law. 46(3)
21. Owner wishing to appeal his assessment must serve notice on the Clerk of the initiating municipality at least 10 days before first sitting of the Court. 52
22. Owner may appeal to Tribunal against decision of Court of Revision by notifying clerk within 21 days of the pronouncement of the decision of the Court of Revision. 54(1)
23. Clerk to alter assessment on order of Court of Revision or Tribunal. 56
24. Owner or public utility may appeal from report of Engineer to Drainage Referee within 40 days of mailing the notices, or the adoption of the report. 47(1). Note: Owners are advised to obtain legal assistance in appealing to the Referee.
25. Owner or public utility may appeal from report of Engineer to Tribunal within 40 days of mailing the notices, or the adoption of the report. 48(1), 99
26. Council of any municipality to which notice has been sent by the initiating municipality may appeal from report of the Engineer to the Tribunal within 40 days of the date the provisional by-law was sent by the initiating municipality. 50(1)
27. Council obtains Ontario Municipal Board approval for project if required. (See sections 64 and 65 of the Ontario Municipal Board Act.)
28. Council obtains any necessary permits.
29. Council of the initiating municipality may pass provisional by-law authorizing the work after time for appeals elapsed, and no appeals or all appeals completed. 58(1)
30. Notice of intention to quash the by-law must be filed with the Clerk of the initiating municipality within 10 days of passing the by-law. 52(2)

31. If a notice of intention to quash the by-law is received, proceedings are delayed until a hearing is held, or 3 months have passed without an application being made to the Referee. 58(2)
32. If the tendered bid exceeds the Engineer's estimate of contract price by one-third, Council must hold a meeting to see if the petitioners want to proceed at the tendered cost. 59(1)
33. *Work may commence* if no appeals, or all appeals favorably resolved. 58(1)
34. If Council does not proceed with construction in a reasonable time, any petitioner can appeal to the Tribunal. 58(5), 99
35. Council must amend by-law if insufficient or surplus funds are provided. 62
36. Local municipalities by-law to raise and pay cost within 60 days of completion of the drainage works. 60
37. Council sends application for grant to the Ministry after the work is completed and time for appealing assessments has expired and there are no appeals, or all appeals have been heard. 88
38. Any owner dissatisfied with the quality of the workmanship on the drain may, within 1 year of completion, appeal to the Tribunal. 64,99

This procedure is to be coordinated with the Town of the Blue Mountain Council schedule and procedures.

2.2 Petition

The Craigleith Landowner Group has requested that the Town pursues improvements to the Blue Mountain Outlet and Diversion Drain and the Ford Outlet Drain to increase the outlet capacity to Georgian Bay. This will alleviate the existing deficient capacity in the downstream systems of Watercourses 7, 8 and 9 to improve overall drainage and provide relief for existing flooding conditions in the Craigleith area.

The petition and staff report (See [Appendix X](#)) was presented to the Town of the Blue Mountains Council at the Committee of the Whole meeting of August 11, 2021. Council made the following motion that was carried by Council

THAT Council receive Staff Report PDS.21.082, entitled "Request for Drainage Act Improvements to the Blue Mountain Outlet & Diversion Drain and the Ford Outlet Drain".

AND THAT the Clerk be directed to send notification of this decision to the Grey Sauble Conservation Authority; AND THAT Council authorize Staff to enter into an agreement with the proponents (both jointly and severally) as referenced in Staff Report PDS.21.082 to obtain funds to appoint an Engineer under Section 8 of the Drainage Act to prepare a report, and to complete the works as recommended by the Engineer, and that this appointment be effective 30 days after the mailing of the notice to Grey Sauble Conservation Authority;

AND THAT Council direct that this report shall be consistent with the results of the Craigleith Flood Risk Assessment.

2.3 Site Meeting

In accordance with the requirements of the Drainage Act, a site meeting was held at 3:00 pm on June 3, 2022 near the crossing of the proposed municipal drain proximate to 204, 208 and 213 Lakeshore Road East. The intent of the meeting in accordance with the Act was to describe the area to be drained and to provide an opportunity for assessed properties to request a change in alignment or

supplemental components (i.e. access crossings) to be provided for the implementation stage of the project.

Ten (10) individuals plus the Drainage Engineer were in attendance at the meeting. There were some concerns raised with respect to the following items:

1. Potential adverse impacts on the continuous flowing section of Watercourse 7. The project description indicated that the works intended are to address peak flow drainage and the diversion from Watercourse 7 is located approximately 160 m upstream from Watercourse 7's crossing of Lakeshore Road. The landowner indicated that their concerns were addressed by this information. No further action is required.
2. There were questions/concerns regarding the upstream developments in terms of traffic and other issues that are not related to drainage. It was noted that the site meeting is not the correct forum for those comments. No further action is required.
3. Concerns were raised from the owners of 213 Lakeshore Road East regarding the installation of the ditching along their south property line and the use of Watercourse 8 in terms of impacts on their property value and ability to develop the property further. They were also concerned with respect to the land value assessment used in the draft report. It was explained that the work in the ditching work along their property is within the municipal right-of-way and would be typical for any road construction and that the property was already encumbered by the existing Blue Mountain Municipal Drain and as Watercourse 8 is a natural watercourse that the works proposed would not encumber their development opportunity anymore than it currently is. The landowner was not satisfied with response as their preference is to not have the municipal drain on their property or the road side ditching installed. Based on the discussion, it was determined that reinstatement of some trees that will be removed would be desirable and that the property value assessment should be reviewed against local comparables.

There were no requests for additional crossings or alternative routing other than the request to remove the municipal drain from the property at 213 Lakeshore Road East. This will be discussed further in this report.

2.4 Area Requiring Drainage

The area requiring drainage is illustrated in Figure 2-1 and contains the following properties as described in the petition:

- Parkbridge Lifestyle Communities Inc. - Part of Lots 161 and 173, and Lot 172, and Part of Lot 169 Registered Plan 529
- MacPherson Builders (Blue Mountains) Limited – Lots 2,3,4,5,6 and 7 of Registered Plan 555; Part Lot 159 of Registered Plan 529, Part of Lot 20, Concession 2 and Helen Street, Registered Plan 555 save and except Part 1, 16R-11489.
- Eden Oak (Trailshead) Inc. – 228 Lakeshore Road East, Registered Plan 529, Part Lot 158 and Part Lot 173 shown as RP 16R4636 Part 1.

This is part of a larger area contributing to the Blue Mountain Outlet (Watercourse 7), Blue Mountain Diversion Outlet (Watercourse 8) and the Ford Municipal Drain Outlet (Watercourse 9). Watercourse 10 is also in the area but is not directly impacted by the proposed works. Figure 2-2 illustrates the overall area contributing to these outlets.

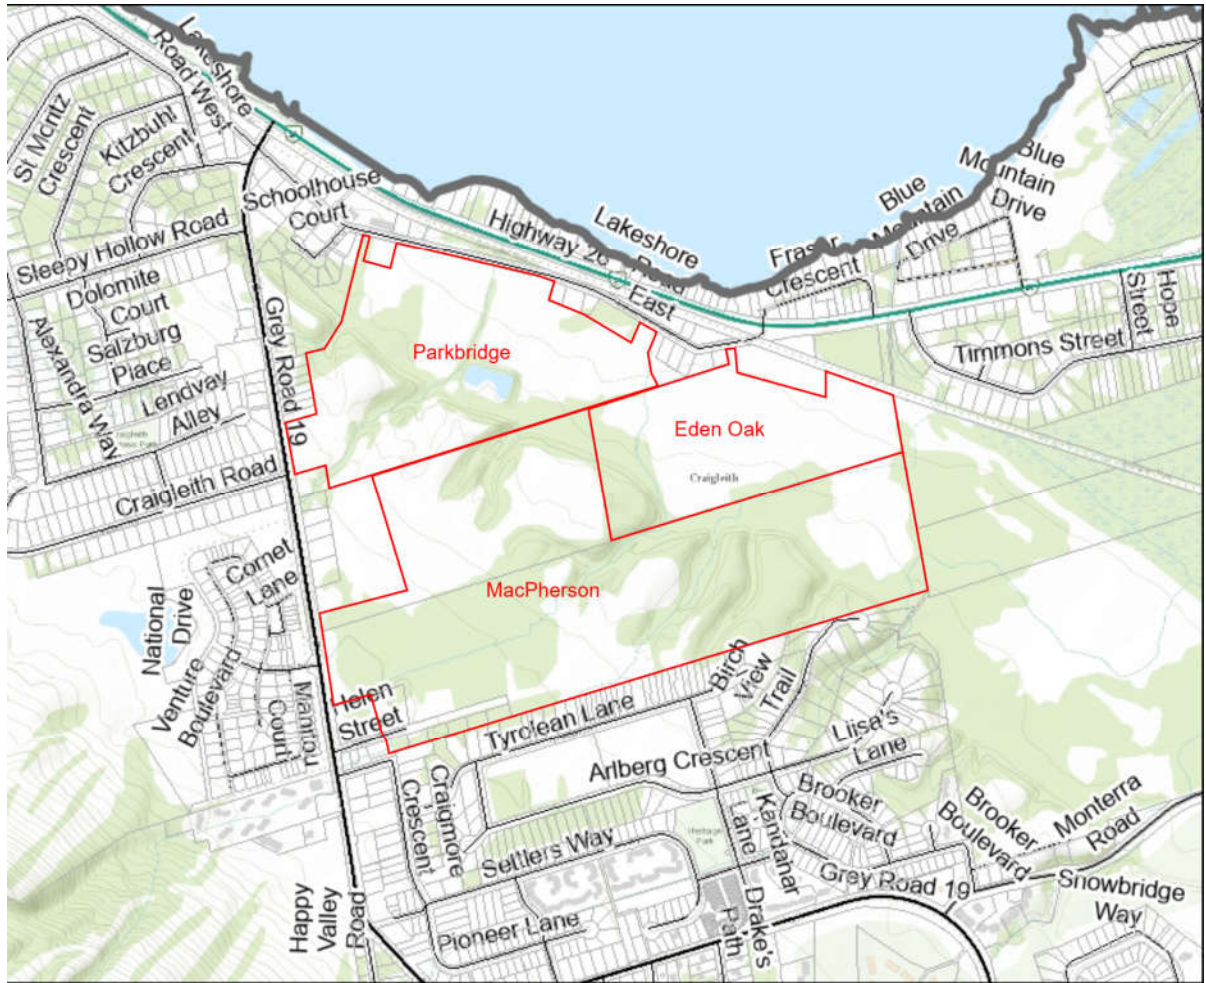


Figure 2-1: Area Requiring Drainage

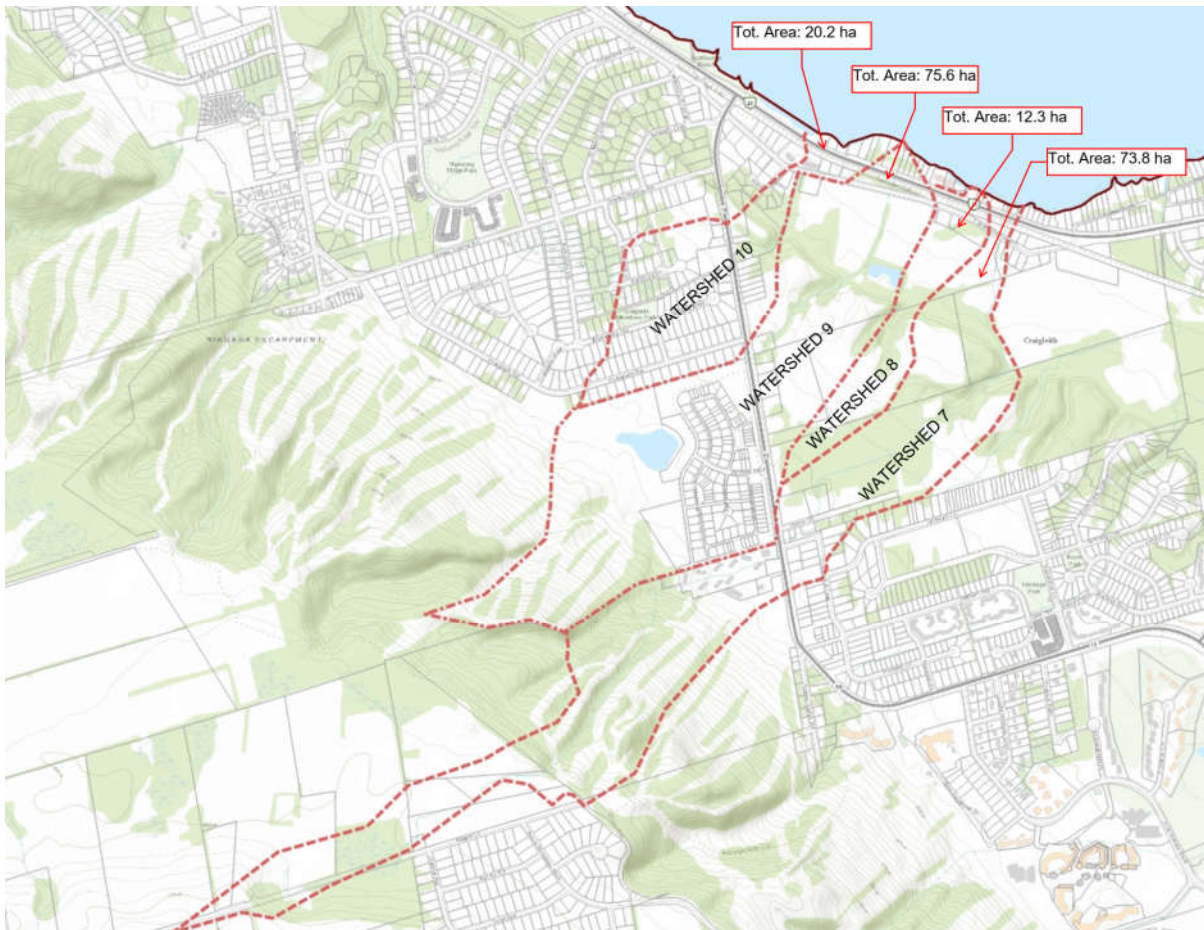


Figure 2-2: Area Contributing to Outlets

2.5 Physiography and Soils

The four watercourses and their associated drainage areas are the subject of this report. To be consistent with the draft report prepared by Crozier Consulting Engineers, the same watercourse naming convention has been adopted in this study.

Table 1-1 summarizes the drainage area of each watershed while a brief description of each watercourse and catchment area is presented below:

- **Watercourse 7** has a drainage area of approximately 180.8 ha and originates on the Niagara Escarpment. Watercourse 7 traverses in the south and east side of the study area passing through the Home Farm lands and along the east side of the Craigleith Ridge lands. **The outlet of Watercourse 7 is addressed in the Blue Mountain Outlet & Diversion Drain Municipal Drain Report dated February 15, 1994.**
- **Watercourse 8** has a drainage area of 8.2 ha which originates in the central portion of the Home Farm lands above the Nipissing Ridge. It is mainly characterized by undeveloped lands consisting of upper terrace lands, the Nipissing Ridge and lower terrace lands. **The outlet of Watercourse 8 is addressed in the Blue Mountain Outlet & Diversion Drain Municipal Drain Report dated February 15, 1994.**
- **Watercourse 9** has a drainage area of approximately 147.9 ha which traverses the Parkbridge Craigleith Ridge Development from Grey Road 19 to Lakeshore Road. Watercourse 9 originates

within the tablelands above the Escarpment and extends across the escarpment face and the subject lands to Georgian Bay. **The outlet of Watercourse 9 is addressed in the Ford Outlet Drain Municipal Drainage Report.**

- **Watercourse 10** has a drainage area of 61 ha, and it is located on the west boundary of the study area. Sub-watershed 10 consists of agricultural land across the tablelands, ski hills across the escarpment face, and primarily undeveloped land along the upper and lower terraces of the Nipissing Ridge.

Table 2-1 - Drainage area of each Watercourse

Watercourse	Drainage Area (ha)
7	180.8
8	8.2
9	147.9
10	61
Total	398

According to the Soil Survey of Grey County (1954), the surficial soils within the study area are characterized as follows:

- **The soil below the Nipissing Ridge is considered to be Group B.** The soil is primarily Granby sand, and the drainage is generally considered to be of poor.
- **The soil traversing the Nipissing Ridge is considered to be Group A.** The soil is identified as Waterloo sandy loam and the soil can be considered to be of good drainage.
- **The soil above the Nipissing Ridge is considered to be Group C.** The soil is identified as Kemble silty clay and is considered to be imperfectly drained.

2.6 Drainage History

As indicated in Section 1.4, there are two existing municipal drainage reports covering the project area. They deal specifically with the outlets only and do not address the upstream drainage channels. The upstream properties within the watershed can only be assessed if they do not have existing riparian rights (i.e., drain into an existing natural channel) and are not collecting runoff artificially to outlet into the municipal drain and that these works as necessary to achieve those objectives.

2.6.1 Blue Mountain Outlet and Diversion Drain

The Blue Mountain Outlet and Diversion Drain Report was developed by Todgham & Case Associates Inc. and issued on February 15, 1994. This report was initiated by a petition signed by the Ministry of Transportation to address an area of Part of Lot 21, Concession 2, in the former Township of Collingwood. Figure 3.x illustrates the project area.


The Engineer's report indicates that the existing 1800x1100mm corrugated steel arch culvert and the downstream channel to Nottawasaga Bay does not have adequate capacity to convey the upstream drainage area. There is available capacity in the existing 1900x1000mm corrugated steel arch culvert located approximately 122 m west along Highway 26.

The proposed works were as follows:

- Replace the existing 1800x1100mm culvert with a new 1390x970mm culvert.
- Retain the outlet drain to Nottawasaga Bay as part of the drainage works (Blue Mountain Outlet – W/C 7 Outlet).

- Install a concrete weir at the new culvert to allow for the diversion to runoff to the diversion drain.
- Install an enclosed relief drain of 113 m of 1535x935mm culvert to the diversion outlet.
- Retain the existing 1900x1000mm culvert across Highway 26 (Diversion – W/C 8).
- Retain the outlet drain to Nottawasaga Bay as part of the drainage works (Diversion Outlet – W/C 8 Outlet).

The assessment for this drain was not fully available in the background information.

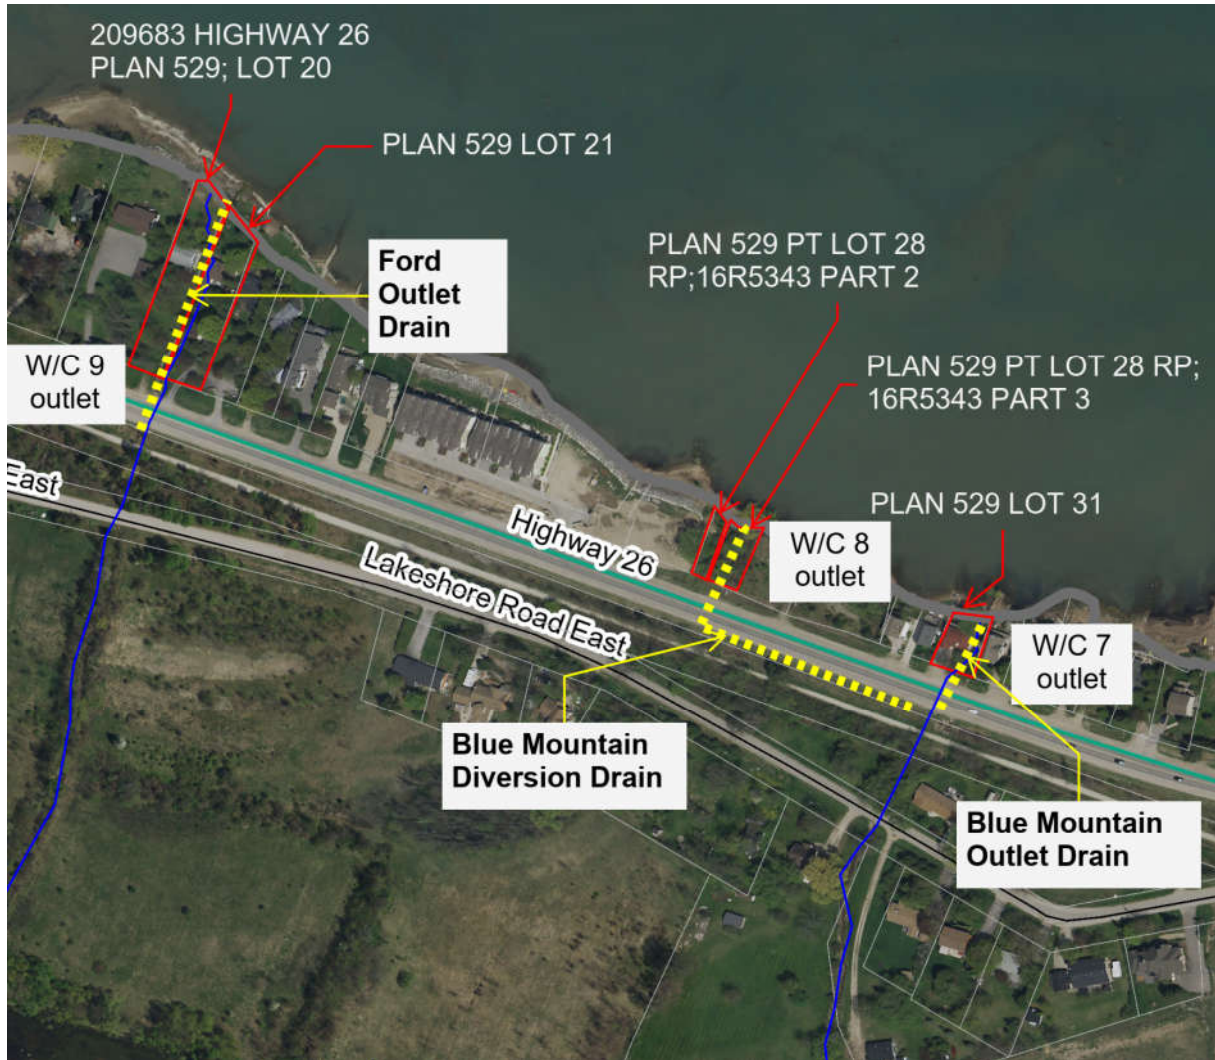

2.6.2 Ford Outlet Drain

The Ford Outlet Drain Report was developed by Todgham & Case Associates Inc. and issued on February 15, 1994. This report was initiated by a petition signed by the Ministry of Transportation to address an area of Part of Lot 21, Concession 2, in the former Township of Collingwood. The project area is indicated in Figure 2-2 as Watershed 9.

The Engineer's report indicates that the existing 1800x1100mm corrugated steel arch culvert was structurally deficient and does not have adequate capacity to convey the upstream drainage area.

Furthermore, the downstream channel to Nottawasaga Bay requires maintenance and the addition of erosion control measures to convey the upstream drainage area.

The proposed works were as follows:

- Replace the existing 1800x1100mm culvert with a new 2440x915mm box culvert.
- Retain the outlet drain from Highway 26 to Nottawasaga Bay be improved by widening and cleaning out as part of the drainage works (Ford Outlet – W/C 9 Outlet).
- Incorporate existing erosion protection works on the east bank of the channel be incorporated as part of these drainage works and positive erosion protection materials be placed on the westerly bank of the channel.

The assessments associated with this drain were as follows:

- Allowances were provided to the owners of the property (Roll 3-390 and 3-391 – Part of Lot 20 and 21) that owned the drain property and were impacted by construction by use of their land and tree removal.
- The cost of the works was divided between public and private lands with the MTO (petitioner) being assessed for majority of the work with the remainder distributed between public and private owners based on benefit and outlet assessment.

2.7 Existing Conditions

The works illustrated in the Municipal drainage reports indicated in Section 2.5 appear to have been implemented and it is not clear if there have been any upgrades to those works or significant maintenance. Therefore, other than minor infill and the North Creek Resort at Blue, the majority of the land has yet to be developed. As the last drainage report was completed in the timeline that would anticipate any further development would have included some measure of stormwater management, it is not anticipated that the peak flows would have increased since the last Engineer's report.

However, as detailed the Crozier report ([Appendix A](#)) the following represents the existing conditions. Watercourses 7, 8, 9 and 10 and their associated watersheds are primarily characterized by the Niagara Escarpment, Nipissing Ridge, and relatively flat lands between the Nipissing Ridge and Georgian Bay. Each of the four watercourses lack natural valley features or consistent channels and due to the variability of the existing topography, combined with the impacts of the upstream drainage areas in terms of spring runoff, which occurs when much of the ground may be frozen thus limiting the formation of channels of adequate capacity. As such, the flows will exceed the capacity of existing channels and spill into adjacent watersheds prior to discharge to Georgian Bay.

In general terms, the topography is sloping from south to north with no significant defined low point, which results in spillage and overtopping of the three constraints (Lakeshore Road, Georgian Trail and Highway 26). It has been identified in the previous studies ([Appendix C and D](#)) that the following are the outlet specific conditions, and this is consistent with our review of the area.

2.7.1 Watercourse 7

Currently for this watercourse, flows above 6.0 m³/s spill into Watercourse 6 from the regional and 100-year storm events. As there is not adequate capacity within the existing outlets crossing Lakeshore, Georgian Trail and Highway 26, the following conditions occur:

1. At Lakeshore Road, the excess flows will overtop the road and some of the flow will return to Watercourse 7, while the remainder will spill to Watercourse 8.

2. At the Georgian Trail, excess flows will flow west into Watercourse 8.
3. At Highway 26, excess flows will be conveyed by the culvert installed as part of the Blue Mountain Diversion Drain Municipal Drain to Watercourse 8.

2.7.2 Watercourse 8

Watercourse is the smallest of the three primary watersheds and as such does not generate large flows. As indicated in the previous section, Watercourse 8 accepts most of the spillage from Watercourse 8 because it is the lowest outlet in the are. This is the case with Watercourse 9 as well. The current culvert across Lakeshore does not have adequate capacity to convey the current design flows and overtops Lakeshore Road. The culverts crossing Georgian Trail and Highway 26 do have enough capacity for the flows associated with this watercourse alone.

2.7.3 Watercourse 9

Watercourse 9 conveys a larger area and, as such has relatively high flows which exceed the downstream capacity of the outlet. The impacts of capacity restriction for each impediment are as follows:

1. At Lakeshore Road, the excess flows will overtop the road and some of the flow will return to Watercourse 9, while the remainder will spill to Watercourse 8.
2. At the Georgian Trail, excess flows will overtop the trail and some of the flow will flow back to Watercourse 9 with the remaining flow being conveyed into Watercourse 8.
3. At Highway 26, excess flows will be conveyed to Watercourse 8 without overtopping Highway 26.

2.8 Proposed Works

The original municipal drain report limited the works to the area from Lakeshore Road to Georgian Bay. The objective of the proposed works is to reduce the amount of upstream flooding within the area to be drained and formalize the current informal spillage of peak flows between watercourses in order to allow for the development of the upstream lands. The proposed works to address the upstream drainage issues requiring drainage include three primary components to an outlet under the provisions of the Drainage Act as follows:

1. Expanded ditching to facilitate the spill from Watercourse 9 to Watercourse 8 consisting of approximately 350 m located between Lakeshore Road and the Georgian Trail within existing right-of-way.
2. A diversion channel to divert spill from Watercourse 7 to Watercourse 8 consisting of approximately 240 m of ditching and 14.9 m – 1200mm x 1800 mm Concrete Box Culvert. This work will require access to Lot 172 (208 Lakeshore Road East) and may impact the lands associated with 213 Lakeshore Road. The remainder of the work would be completed within the right-of-way.
3. Upgrades to the Watercourse 8 (Blue Mountain Diversion Drain) outlet crossing the Georgian Trail with twin 1260mm x 1880 mm CSP pipe arch culverts and Highway 26 with twin 1200 mm x 1800 mm concrete box culverts and improvements to the outlet to Georgian Bay.

Due to the configuration of the outlets and topography combined with the capacity of the existing outlets limits the options for addressing the problem in this area to the use of Watercourse 8.

2.9 Drawings and Specifications

Drawings and specifications shall be prepared by the Development group's Engineering Consultant, Crozier and are included in **Appendix E**.

2.10 Impact on other Municipal Drains

This project impacts both the works associated with the Blue Mountain and Blue Mountain Diversion Drain (Watercourse 7 and 8) as well as the Ford Municipal Drain (Watercourse 9). However, as the outlet and benefit to this work has not changed for the majority of the impacted landowners from those projects, there will be no assessment of lands upstream of the lands to be drained.

2.11 Allowances

The proposed channel improvements and upgrades are primarily located within the municipal right-of-way. However, the diversion channel from Watercourse 7 is located on Lot 172 (208 Lakeshore Road East), Registered Plan 529 and will impact the property at 213 Lakeshore Road for construction and culvert installation purposes. Furthermore, it will be necessary to gain access to the works from this property for future maintenance. We have estimated the value of the damages associated with construction and maintenance for these properties under Section 29 of the Drainage Act. Land values have been assessed based on a combination of MPAC assessments and comparable vacant land values in the area allowing for the developable areas of the property.

There are a number of trees that will be removed as part of the construction of the lands including a large area of minor trees and shrubs that form a visual buffer between Lakeshore Road and Highway 26. In order to compensate property owners for the loss of trees, we have estimated the value of the trees and provided an allowance under Section 30 of the Drainage Act. As part of the project, it is recommended that a visual barrier of appropriate native species be reinstated the vacant land on 213 Lakeshore Road East and the proposed works. Table 2-2 illustrates the proposed allowances for these works.

Table 2-2: Schedule of Allowances

Roll No.	Lot or Part	Owner	Land	Trees	Total
424200000336600	PLAN 529 LOT 172 PT LOTS 161;AND 173 AND RP 16R6640 PART 2	Parkbridge Developments	\$21,000		\$21,000
424200000336801	PLAN 529 PT LOT 174 RP;16R3841 PART 2	Kay Alison Caroline / Oegema Bernard Herman	\$21,600	\$7,500	\$ 29,100
Total			\$42,600	\$7,500	\$50,100

2.12 Cost Estimate

The estimated cost of the project including all associated incidental expenses and contingencies is as follows in Table 2-3.

Table 2-3: Overall Project Cost Estimate

Watercourse 9 to Watercourse 8 Diversion Channel		
Item	Quantity	Cost
Clearing and Stripping	3,100 sq.m.	\$15,550
Excess Soil Management and Disposal	3,420 cu.m.	\$85,500
Fine Grading and Ditch Shaping	375 LM	\$18,750
Reinstatement	3,310 sq.m.	\$16,550
Subtotal		\$151,900

Watercourse 7 to Watercourse 8 Diversion Channel		
Item	Quantity	Cost
Clearing and Stripping	1,940 sq.m.	\$9,700
Excess Soil Management and Disposal	1,200 cu.m.	\$30,000
Fine Grading and Ditch Shaping	360 LM	\$18,000
Reinstatement	2,140 sq.m.	\$10,700
Subtotal		\$68,400
Watercourse 8 – Lakeshore Road Crossing		
Item	Quantity	Cost
Removals	LS	\$10,000
Clearing and Stripping	100 sq.m.	\$500
1200 x 1800 Box Culvert	15 LM	\$67,500
End Treatment	LS	\$10,000
Excess Soil Management and Disposal	850 cu.m.	\$21,250
Granulars (“B” and “A”) Road base and Frost Tapers	360 T	\$8,370
Asphalt Replacement	27 T	\$4,170
Traffic Control	LS	\$10,000
Reinstatement	100 sq.m.	\$500
Tree Replacement	10	\$5,000
Subtotal		\$137,290
Watercourse 8 – Georgian Trail Crossing		
Item	Quantity	Cost
Clearing and Stripping	300 sq.m.	\$3,000
Removals	LS	\$2,000
1260 x 1880 CSP Pipe Arch Culvert	20 LM	\$70,000
End Treatment	LS	\$10,000
Excess Soil Management and Disposal	1,200 cu.m.	\$30,000
Granular “A” base and Frost Taper	175 T	\$4,375
Reinstatement	320 sq.m.	\$1,600
Subtotal		\$131,670
Watercourse 8 – Highway 26 Crossing		
Item	Quantity	Cost
Removals	LS	\$10,000
Clearing and Stripping	200 sq.m.	\$2,000
1200 x 1800 Box Culvert	52 LM	\$208,000
End Treatment	LS	\$30,000
Excess Soil Management and Disposal	2,000 cu.m.	\$50,000
Granulars (“B” and “A”) Road base and Frost Tapers	1,130 T	\$26,250
Asphalt Replacement	90 T	\$13,800
Traffic Control	LS	\$60,000
Reinstatement	200 sq.m.	\$1,000
Subtotal		\$414,050
Watercourse 8 – Nottawasaga Bay Outlet		
Item	Quantity	Cost
Clearing and Stripping	615 sq.m.	\$6,150
Excess Soil Management and Disposal	370 cu.m.	\$9,250
Fine Grading and Ditch Shaping	90 LM	\$4,500
Reinstatement	630 sq.m.	\$3,150
Subtotal		\$23,050

General		
Item	Quantity	Cost
Mobilization/Demobilization	LS	\$20,000
Erosion and Sediment Control	LS	\$25,000
Dewatering	LS	\$10,000
Subtotal		\$55,000
Allowances		
Land	LS	\$42,600
Trees	LS	\$7,500
Subtotal		\$50,100
Construction and Allowances Subtotal		\$1,031,460
Drainage Engineer Report	LS	\$ 23,298
Engineering Design (10%)	10%	\$ 96,581
Contingency	15%	\$144,872
HST	13%	\$163,457
Total		\$1,420,820

2.13 Assessment

In accordance with Section 21 to 28 of the Drainage Act, all of the costs associated with the works recommended by this report are assessable and recoverable from the lands affected by the work within the watershed and are eligible for assessment.

For the purposes of this report, lands that were previously assessed in the 1994 Engineer's reports and do not gain an incremental benefit to the proposed works are not assessed under these works.

All properties which do not have riparian rights and use stormwater collection systems to collect and discharge them to a sufficient outlet as defined in the Drainage Act. Schedule A ([Appendix A](#)) illustrates the assessment of estimated costs against affected lands and roads.

It should be noted that the final assessment shall be based on the actual cost of the works completed with the exception of the defined allowances which are compensation in lieu of damages.

2.14 Special Benefit Assessment

In accordance with Section 24 and 26 of the Drainage Act, a special benefit is to be assessed for the increased cost of drainage works caused by the existence of the public utility or authority. As such, the Ministry of Transportation is to be assessed a special benefit for the costs associated with the reinstatement of their roads as part of the drainage improvements.

We estimate the increase in cost to the project caused by Highway 26, Lakeshore and the Georgian Trail to be as detailed in Table 2-3, 2-4 and 2-5

Table 2-4: Highway 26 Special Benefit Estimate

Item	Estimated Cost	Comment
Granular Base ("B" and "A")	\$26,250	
Asphalt Reinstatement	\$13,800	
Traffic Control and Signage	\$60,000	
Estimated Construction Cost	\$100,050	
Additional Engineering and Contingencies	\$18,010	
Net Increase Due to Road	\$118,060	

Table 2-5: Lakeshore Road Special Benefit Estimate

Item	Estimated Cost	Comment
Granular Base ("B" and "A")	\$8,370	
Asphalt Reinstatement	\$4,170	
Traffic Control and Signage	\$10,000	
Estimated Construction Cost	\$22,540	
Additional Engineering and Contingencies	\$4,060	
Net Increase Due to Road	\$26,600	

Table 2-6: Georgian Trail Special Benefit Estimate

Item	Estimated Cost	Comment
Granular Base ("B" and "A")	\$4,375	
Additional Engineering and Contingencies	\$ 800	
Net Increase Due to Road	\$5,175	

In accordance with Section 69 of the Drainage Act:

69 (1) Where a drainage works or a part thereof is to be constructed, improved, maintained or repaired upon, along, adjoining, under or across the lands, permanent way, transmission lines, power lines, wires, conduits or other permanent property of a public utility or road authority, the public utility or road authority may construct, improve, maintain or repair such drainage works or part. R.S.O. 1990, c. D.17, s. 69 (1).

Therefore, the MTO and Town have the option of completing construction within the right-of-way by their own forces. If that option is exercised, the special benefit by the amount of the engineering and contingency. The cost of these works must be separated in the procurement process such that they can be assessed independently.

2.15 Maintenance

The Drainage Works to be known as the Blue Mountain Diversion Drain as improved under this report from south of Lakeshore Road to the outlet at Nottawasaga Bay shall be maintained by the Town of the Blue Mountains. All future maintenance costs associated with this drain shall be paid by the lands assessed in Schedule 'A' in the same proportions except for special benefit which will not be used for maintenance assessments.

The MTO shall be responsible to maintain the road crossing and any changes to the drainage associated with their road crossing installed under this report at their sole expense.

APPENDIX A

Schedule A - Assessments



**Schedule A
Schedule of Assessment
Blue Mountain Diversion Drain Outlet**

Town of the Blue Mountains

Provincial Lands

Name	Roll No.	Lot or Part	Area	Owner	Benefit	Special Benefit	Outlet	Total Assessment
Highway 26			0.83	Ministry of Transportation	\$ -	\$ 118,060.00	\$ 11,139.77	\$ 129,199.77
Total								\$ 129,199.77

Municipal Lands

Name	Roll No.	Lot or Part	Area	Owner	Benefit	Special Benefit	Outlet	Total Assessment
Lakeshore Road			1.24	Town of the Blue Mountains		\$ 26,600.00	\$ 16,550.82	\$ 43,150.82
Georgian Trail			1.24	Town of the Blue Mountains		\$ 5,175.00	\$ 16,550.82	\$ 21,725.82
Total								\$ 64,876.64

Privately Owned Lands (Non-Agricultural)

Name	Roll No.	Lot or Part	Area	Owner	Benefit	Special Benefit	Outlet	Total Assessment
228 Lakeshore Road East	424200000334600	PLAN 529 PT LOT 158 AND PT;LOT 173 SHOWN AS RP 16R4636;PART 1	4.092	Eden Oak (Trailhead) Inc.	\$ 201,697.24		\$ 54,617.71	\$ 256,314.95
208 Lakeshore Road East	424200000336600	PLAN 529 LOT 172 PT LOTS 161;AND 173 AND RP 16R6640 PART;2	5.28	Parkbridge Lifestyle	\$ 260,254.50		\$ 70,474.46	\$ 330,728.96
Grey Road 19	424200000334300	PLAN 529 PT LOT 159	5.96	Blue Mountains Ltd Macpherson Builders	\$ 293,772.13		\$ 79,550.72	\$ 373,322.85
Grey Road 19	424200000334100	CON 2 S PT LOT 20	1.52	Blue Mountains Ltd Macpherson Builders	\$ 74,921.75		\$ 20,288.10	\$ 95,209.85
210 Lakeshore Road East	424200000336605	PLAN 529 PT LOT 173 RP;16R6640 PART 1	0.24	NOBLE THERESA LYNN			\$ 3,203.38	\$ 3,203.38
213 Lakeshore Road East	424200000336801	PLAN 529 PT LOT 174 RP;16R3841 PART 2	0.3376	BERNARD HERMAN			\$ 4,506.09	\$ 4,506.09
Total								\$ 1,063,286.09
Total Assessment			20.74		\$ 830,645.63	\$ 149,835.00	\$ 276,881.88	\$ 1,257,362.50

APPENDIX B

**Regional Stormwater Management Plan Watercourse 7, 8, 9 & 10 –
Craigleith Residential Development – (Draft) April 2018, C.F. Crozier &
Associates Inc.**



**REGIONAL STORMWATER MANAGEMENT PLAN
WATERCOURSE 7, 8, 9 & 10**

**CRAIGLEITH
RESIDENTIAL DEVELOPMENT
TOWN OF THE BLUE MOUNTAINS**

**PARKBRIDGE LIFESTYLE COMMUNITIES INC. &
MACPHERSON BUILDERS LTD.**

PREARED BY:

**C.F. CROZIER & ASSOCIATES INC.
THE HARBOUREDGE BUILDING
40 HURON STREET, SUITE 301
COLLINGWOOD, ONTARIO
L9Y 4R3**

DRAFT - APRIL 2018

CFCA FILE NO. 1046-4031 & 721-3464

The material in this report reflects best judgment in light of the information available at the time of preparation. Any use which a third party makes of this report, or any reliance on or decisions made based on it, are the responsibilities of such third parties. C.F. Crozier & Associates Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

TABLE OF CONTENTS

1.0	INTRODUCTION	1
1.1	Study Area	1
1.2	Study Purpose	1
1.3	Proposed Developments	1
2.0	BACKGROUND & PREVIOUS STUDY	3
3.0	EXISTING CONDITIONS & CURRENT FLOODING CONDITIONS	5
3.1	Watercourse 7	5
3.2	Watercourse 8	8
3.3	Watercourse 9	9
3.4	Watercourse 10	11
4.0	PROPOSED DEVELOPMENT STORMWATER MANAGEMENT STRATEGY & FUTURE CONDITIONS	13
4.1	Watercourse 7 & 8	13
4.1.1.	Proposed SWM Design - Home Farm Development	13
4.1.2.	Proposed Development SWM Design - Parkbridge	13
4.2	Watercourse 9	14
4.2.1.	Proposed SWM Design – Home Farm Development	14
4.2.2.	Proposed SWM Design – Parkbridge Development	14
4.3	Watercourse 10	15
4.3.1.	Proposed SWM Design – Parkbridge Craigleith Ridge Development	15
4.4	Summary	15
5.0	FLOOD CONVEYANCE OPPORTUNITIES	17
5.1	Watercourse 7	17
5.2	Watercourse 8	17
5.3	Watercourse 9	17
6.0	PROPOSED FLOOD CONVEYANCE STRATEGY	19
6.1	Watercourse 7 & 8	19
6.1.1.	Proposed Flood Management Strategy	19
6.2	Watercourse 9	20
6.2.1.	Proposed Flood Management Strategy	20
7.0	EVALUATION OF OPTIONS	21
7.1	Summary of Options	21
7.2	Evaluation of Alternatives	22
8.0	CONCLUSIONS & RECOMMENDATIONS	24

APPENDICES

Appendix A:	Terms of Reference
Appendix B:	Study Area Existing Conditions
Appendix C:	Site Photos
Appendix D:	Existing Hydraulic Structures Inventory & Calculations
Appendix E:	Improvement Options & Calculations

LIST OF FIGURES

Figure 1:	Existing Subwatershed Catchment Plan
Figure 2:	Post-development Subwatershed Catchment Plan
Figure 3:	Watercourse 7, 8, 9 Existing Outlet Infrastructure
Figure 4:	Drainage Network – Existing Conditions
Figure 5:	Drainage Network – Option 1
Figure 6:	Drainage Network – Option 2
Figure 7:	Drainage Network – Option 3
Figure 8:	Conceptual Watercourse 7 and Watercourse 9 Flood Relief Channel Plan

1.0 INTRODUCTION

CF Crozier & Associates Inc. has been retained by Parkbridge Lifestyle Communities Inc. (Parkbridge) and MacPherson Builders Ltd. (MacPherson) to complete a Regional Stormwater Management Plan to supplement the development applications for both developers in the Craigleith area.

The Town of The Blue Mountains has requested that a Regional Stormwater Management Plan be prepared to provide a comprehensive analysis of the local watercourses, as the local watercourses experience significant flow interactions with each other. This report has been prepared to document the existing flooding conditions of the local watercourses and analyze possible flooding mitigation options and is based on the Terms of Reference developed in consultation with the Town of the Blue Mountains. The Terms of Reference is included in **Appendix A**.

This study will build upon the findings the Grey Sauble Conservation Authorities Subwatershed Study (1993) recognizing the historic identification of a flood damage center for Watercourse 7 at its outlet downstream of Highway 26.

1.1 Study Area

This report will analyse four watercourses located within the study area of the Craigleith Camperdown Subwatershed Study (prepared for GSCA by Gore & Storrie, November 1993). The watercourse naming convention has been adopted in this report to be consistent with that study. Watercourses 7, 8, 9 and 10 and their associated drainage areas are the subject of this report.

The study area has been outlined in **Appendix B**.

1.2 Study Purpose

Numerous residential properties are located adjacent to Watercourses 7, 8, 9 and 10 in the area of Highway 26 and Lakeshore Road. Some of these residential properties have been identified to experience historical flooding from these watercourses during high rainfall events and spring freshet conditions.

As such, the Town has requested that a comprehensive analysis of Watercourses 7, 8, 9 and 10 be prepared to assess the existing flooding conditions of the watercourses and make recommendations to improve upon the existing flood conveyance infrastructure downstream of the Parkbridge Craigleith Ridge and MacPherson Home Farm developments.

1.3 Proposed Developments

This report has been prepared to supplement the development applications of two proposed developments in the Craigleith area, the Parkbridge Craigleith Ridge Development and MacPherson Home Farm Development.

Parkbridge Craigleith Ridge

The Parkbridge Craigleith Ridge development is comprised of three separate property parcels. The largest 25 ha (62 acre) property is located south of Lakeshore Road and is legally described

as Plan 529, Part Lot 161, Town of The Blue Mountains, County of Grey. A smaller 1.2 ha (3 acre) property is located south of Lakeshore Road and is legally described as Plan 529, Lot 172 and Part Lot 173 as Part 2 RP 16R-6640, Town of The Blue Mountains, County of Grey. Finally, the third parcel is an approximately 0.6ha undeveloped parcel located north of Lakeshore Road, bounded by Lakeshore Road and Georgian Trail. This parcel is legally described as Plan 529 Part Lot 169, Town of The Blue Mountains, County of Grey.

The Craigleith Ridge development traverses the Nipissing Ridge with a portion of development lands on the upper terrace above the ridge, as well as below the ridge on the lower terrace lands.

The primary drainage features of the site is Watercourse 9 that bisects the site. Watercourse 7 bounds the site at the northeast and Watercourse 10 bounds the site at the west. Watercourse 8 also crosses the site in an ephemeral fashion, as there is no defined valley feature or channel present on the lower terrace lands.

The development concept reflects a total of 211 residential units comprised of a mixture of single detached, townhome and loft townhome units as well as a series of private roads, environmental, open space and stormwater management facility areas. Parkbridge proposes the subject community be developed as a land lease community geared towards the adult lifestyle and recreation markets. In December 2016 a Functional Servicing and Stormwater Management Report was prepared by Crozier in support of planning applications for the Craigleith Ridge development.

MacPherson Home Farm Development

The MacPherson Home Farm development is approximately 60.25ha and is located at the top of Nipissing Ridge to the southeast of the proposed Craigleith Ridge development. The lands are legally described as Lots 2, 3, 4, 5, 6, and 7 – Plan 555, Part of Lot 159 – Plan 529, Part of Lot 20 – Concession 2, and Part of Helen Street ROW – Plan 555.

Home Farm is bounded by County Road 19 to the west, Nipissing Ridge to the north and east, and Tyrolean Lane to the south. The primary drainage features consist of Watercourse 7 crossing the site, and the upper tributary reaches of Watercourse 8 which begins on the Home Farm site.

The Home Farm development is planned to contain 283 residential units that consist of 132 townhouse units and 151 detached units. In February 2015 a Functional Servicing & Stormwater Management Report was prepared by Higgins Engineering Ltd. in support of planning applications for the proposed development.

2.0 BACKGROUND & PREVIOUS STUDY

Watercourses 7, 8, 9 and 10 were first analyzed as part of the Craigleith Camperdown Subwatershed Study (GSCA, 1993). That report analyzed 35 watercourses in the Craigleith/Camperdown area and examined hydrology, hydrogeology, and floodplain characteristics along with other watershed elements.

Subsequent to the Craigleith Camperdown Subwatershed Study, various hydraulic investigations of the Watercourses 7, 8, 9 & 10 have subsequently been undertaken to support development applications within these subwatershed boundaries.

Watercourse 7

Watercourse 7 has been previously assessed by Crozier in support of the Eden Oak Trailhead Development which is located immediately east of the Craigleith Ridge site at the base of the Nipissing Ridge. Hydraulic analysis was completed to determine the development setbacks to the development and summarized in the Functional Servicing and Stormwater Management Report by Crozier (April 2012).

Higgins Engineering Ltd. studied the Watercourse 7 subwatershed further in support of the existing Orchards subdivision located upstream of both the Craigleith Ridge and Home Farm developments. To facilitate subdivision grading within the Orchards development, 8.91 ha of lands were diverted from the Watercourse 7 Subwatershed to the Watercourse 9 Subwatershed.

In support of the proposed Home Farm Development, Higgins Engineering Ltd. completed a Functional Servicing and Stormwater Management Report (February 2015) which outlined the pre and post development hydrology of Watercourse 7 with respect to the Home Farm development. Higgins Engineering has proposed to divert 8.48 ha from subwatershed 9 to subwatershed 7 to facilitate the subdivision grading of Home Farm, and to restore the subwatershed areas between Watercourse 9 and Watercourse 7. Once completed with the development of the Home Farm lands, the land swap between Subwatershed 7 and Subwatershed 9 will remain at their historic drainage areas.

Crozier has completed various site investigations and surveys to inventory the capacity of the downstream drainage infrastructure (culverts, channels, outlets) of Watercourse 7 between Lakeshore Road and the outlet to Georgian Bay.

Watercourse 8

Given the poorly defined channel and lack of valley feature as well as the relatively small catchment area, Watercourse 8 has not been the subject of considerable formalized study.

Crozier has completed various site investigations and surveys to inventory the capacity of the downstream drainage infrastructure (culverts, channels, outlets) of Watercourse 8 between Lakeshore Road and the outlet to Georgian Bay.

Watercourse 9

Watercourse 9 has been previously assessed by Crozier in 2008 for the Craigleith Ridge development property on behalf of a previous owner. This work was used in support of updates to the planning designations for the subject lands. Crozier completed natural hazards assessments, functional servicing and stormwater management designs for the previous concept plan on the property. The results of the natural hazards assessments were presented and refined with the Town and the Grey Sauble Conservation Authority (GSCA). Through this process, a settlement was reached with the Town and the GSCA that confirmed the hazard land limits for the subject lands.

Watercourse 9, upstream of Grey Road 19, has been assessed by Higgins in support of The Orchards development located west of County Road 19 upstream of the Craigleith Ridge lands. A subwatershed hydrologic model for the catchments upstream of County Road 19 was completed and formalized in the Stormwater Management Design Brief and Functional Servicing Report (Higgins, 2005).

The previous study of Watercourse 9 was expanded upon by Crozier in 2016 to support the planning applications for the proposed Parkbridge Craigleith Ridge development. Summarized in a Functional Servicing and Stormwater Management Report (December 2016), the Parkbridge development proposes Watercourse 9 as the primary outlet for the development lands. A hydrologic model of subwatershed 9 was constructed to guide the design of the proposed stormwater management facilities to achieve "pre to post" peak flow attenuation.

Watercourse 10

The Watercourse 10 watershed was studied in detail by R.J. Burnside & Associates in a report titled Stormwater Management Study for Craigleith Ski Club (2004) to provide future criteria for development at the base of the Craigleith Ski Club.

In 2009, Crozier assessed Watercourse 10 in support of the Bannerman Development located south of Lakeshore Road and directly west of the Craigleith Ride site on the lower terrace lands. At the request of the MTO, Crozier completed a subwatershed-scale hydrologic assessment corresponding hydraulic assessment of the existing Lakeshore Road and Highway 26 culverts for capacity and recommendations of improvements.

3.0 EXISTING CONDITIONS & CURRENT FLOODING CONDITIONS

Watercourses 7, 8, 9 and 10 and the associated watersheds are primarily characterised by the Niagara Escarpment, Nipissing Ridge, and relatively flat lands between the Nipissing Ridge and Georgian Bay.

Downstream of the Nipissing Ridge, all four watercourses lack valley features and exhibit varying levels of channel definition and historic channel alteration. Due to these channel characteristics all four watercourses often experience flows exceeding the channel capacity which spill into the adjacent watershed / lands generally towards Georgian Bay.

The surficial soils within the study area are characterized by the Soil Survey of Grey County (1954). Below the Nipissing Ridge the soil is primarily Granby sand which is generally considered as hydrologic soil Group B and is poor draining. The soils traversing the Nipissing Ridge are characterized as Waterloo sandy loam (Group A) and is considered to be well draining. Above the Nipissing Ridge the soils are characterized as Kemble silty clay (Group C) and is considered to be imperfectly drained.

3.1 Watercourse 7

Watercourse 7 has a catchment area of approximately 180 ha and originates on the Niagara Escarpment. Watercourse 7 traverses the south and east side of the study area passing through the Home Farm lands and along the east side of the Craigleith Ridge lands.

Above the Nipissing Ridge, the drainage patterns are undefined and have varied historically. During high flow events Watercourse 7 has been known to spill out onto the former farm fields of the Home Farm lands which are generally low in relief.

During a site investigation by Crozier staff on March 28, 2016, Watercourse 7 was noted to lack a valley feature across the Home Farm lands and was noted to breach the capacity of the channel and spill in multiple locations. The spill flows observed were generally towards the north of Watercourse 7 to undefined drainage features and large areas of ponding were observed. The low relief of the Home Farm lands was observed and drainage routes were not obvious across the site. It is believed that some spill flow to the north may be directed to Watercourse 8 and possibly spill towards the Parkbridge lands and the residents of Lakeshore Road adjacent Watercourse 8. There are multiple incised ravines that traverse the Nipissing Ridge before converging with the main channel below the ridge. These ravines are believed to drain the large ponding areas on the Home Farm site. A gravel access road was noted to have ditches that conveyed portions of Watercourse 7 spill flows towards the northeast before re-converging with the main channel. Spill flow from these ditches were noted to be redirected to Watercourse 6 to the east. Refer to **Appendix C** for photos from the site investigation.

Below the Nipissing Ridge, Watercourse 7 is contained to a well-defined channel and passes between a number of existing residential units adjacent to Lakeshore Road and Highway 26. The outlet of this watercourse is downstream of Highway 26 and was identified as a flood damage area in the original Craigleith Camperdown Subwatershed Study (GSCA, 1993), due to channel constrictions imposed by existing residences.

The existing conditions peak flows of Watercourse 7 were established by the Grey Sauble Conservation Authority's Subwatershed Study (GSCA, 1993). The watershed hydrology model has

subsequently been refined as development applications have proceeded in the watershed. These flows are summarized in **Table 1** below.

Table 1
Watercourse 7 Existing Hydrologic Flows (GSCA Model)

Location	Return Period	Peak Flow (m ³ /s) ¹
Lakeshore Road	2-Year	2.89
	5-Year	3.93
	10-Year	4.95
	25-Year	5.79
	50-Year	6.44
	100-Year	7.39
	Regional	9.72

⁽¹⁾Peak flows per Craigleith Camperdown Subwatershed Study (GSCA, 1993)

In support of the Eden Oak Development, Crozier completed a hydraulic assessment of Watercourse 7 as it crosses the lower terrace lands. The watercourse 7 hydraulic assessment is summarized in the Functional Servicing & Stormwater Management Report (Crozier, 2012). The hydraulic model was prepared using HEC-RAS modeling software to determine the existing flood conditions of Watercourse 7 and associated development limits for the Eden Oak Development.

The hydraulic assessment identified a spill-flow condition at the base of the Nipissing Ridge at flow rates above 6 m³/s. It was found that the exceeding flows overtopped the right overbank of Watercourse 7 and spilled eastward into the Eden Oak Lands and ultimately into subwatershed 6. The Eden Oak development applications proceeded under the premise of maintaining this spill flow to Watercourse 6.

Table 2 summarizes the peak flows experienced at Lakeshore Road with and without the spill flow condition at Eden Oak.

Table 2
Watercourse 7 Existing Hydrologic Flows – With Spill Flow

Return Period	Spill Flow at Eden Oak (m ³ /s)	Peak Flow at Lakeshore (Spill) (m ³ /s)	Peak Flow at Lakeshore (No Spill) (m ³ /s)
2-Year	0	2.893	2.89
5-Year	0	3.943	3.94
10-Year	0	4.950	4.95
25-Year	0	5.791	5.79
50-Year	0.442	6.0	6.44
100-Year	1.393	6.0	7.39
Regional	3.720	6.0	9.72

Between the Nipissing Ridge and Georgian Bay, Watercourse 7 has experienced historical flooding affecting various residential properties. In particular, residences upstream Lakeshore Road and downstream of Highway 26 have experienced flooding issues during large storm events

and spring freshet events. Crozier staff have observed the operational conditions of the Watercourse 7 conveyance infrastructure in the Lakeshore Road and Highway 26 area on numerous occasions throughout recent years. Photos from these site investigations are included in **Appendix C** for reference.

Additionally, Crozier has inventoried and assessed the hydraulic capacities of the existing drainage infrastructure on Watercourse 7. The inventory is summarized in **Table 3**.

Table 3
Watercourse 7 Existing Drainage Infrastructure Inventory & Capacities

Location	Description	Maximum Capacity m^3/s	Approx. Return Period	Typical Design Standard
Lakeshore Road	Concrete box culvert (0.95m x 1.9m)	3.8 ¹	< 5-Year	25-Year ²
Georgian Trail	Twin CSP culverts (1.2m diameter)	4.5 ¹	< 10-Year	N/A
Highway 26	CSP arch (0.9m x 1.35m)	2.0 ¹	< 2-Year	100-Year ³
Outlet Channel	Channel between dwellings (0.60m x 0.90m)	1.2	< 2-Year	N/A

¹ Maximum capacity of culverts operating under head without overtopping road

² Town of the Blue Mountains Design Standard

³ Ministry of Transportation Design Standard

As outlined in Table 2, there is insufficient capacity of all hydraulic structures on Watercourse 7 based on the typical design criteria. It is noted that the outlet channel is the limiting section of Watercourse 7 as it represents the lowest conveyance capacity. Given the close proximity of the existing residences, 209725 & 209727 Highway 26, this location is highly flood susceptible under existing conditions.

Due to the historical flooding events and poor capacity of the Watercourse 7 outlet channel, there have been improvements previously implemented in an effort to mitigate flooding impacts. These improvements include the construction of a lateral relief pipe located between Highway 26 and Georgian Trail which is intended to divert flow from Watercourse 7 to Watercourse 8. When the Highway 26 culvert reaches capacity the flow is intended to be diverted to Watercourse 8 via the lateral relief structure. The ditch of Highway 26 also serves as additional flow conveyance from Watercourse 7 to Watercourse 8 when the Highway 26 culvert is surcharged.

Table 4 summarizes the existing lateral flow diversion infrastructure and their capacities.

Table 4
Watercourse 7 Existing Flow Diversion Infrastructure Inventory & Capacities

Location	Description	Capacity (m^3/s)
Highway 26	Concrete Arch Pipe (0.9m x 1.5m)	1.5 ¹
Highway 26	Highway 26 ditch (0.75m depth, 0.5%)	1.8

¹ Maximum capacity of culvert operating under head without overtopping Highway 26

When accounting for the capacities of the lateral concrete pipe, Highway 26 ditch, and the existing outlet channel, the maximum capacity of the Watercourse 7 conveyance infrastructure is approximately 4.5 m³/s which equates to less than the 25-Year storm event.

3.2 Watercourse 8

Watercourse 8 is a relatively small subwatershed which originates in the central portion of the Home Farm lands above the Nipissing Ridge. Subwatershed 8 drains approximately 13ha of primarily undeveloped lands consisting of upper terrace lands, the Nipissing Ridge and lower terrace lands. The portion of the subwatershed that is contained within the Home Farm Development consists of the upper terrace lands and is vegetated with a mixture of meadows and trees. Two distinct drainage draws drain the upper terrace and Nipissing Ridge lands, and enter the lower terrace lands. Upon entry to the Craigleith Ridge lands downstream of the ridge, the drainage draws become less defined resulting in runoff being conveyed primarily as sheet flow where it infiltrates back into porous soils and fractures within the shallow bedrock.

Crozier has completed a hydrologic assessment of the Watercourse 8 subcatchment to determine the existing flows experienced at Lakeshore Road.

Table 5
Watercourse 8 Existing Hydrologic Flows (Crozier Hydrologic Model)

Location	Return Period	Peak Flow (m ³ /s) ¹
Lakeshore Road	2-Year	0.12
	5-Year	0.25
	10-Year	0.41
	25-Year	0.56
	50-Year	0.65
	100-Year	0.84
	Regional	1.09

Between the Nipissing Ridge and Lakeshore Road, no defined channel exists. Downstream of Lakeshore Road, Watercourse 8 re-develops into a small stream before crossing under Lakeshore Road, Georgian Trail, and Highway 26.

Crozier has inventoried and assessed the hydraulic capacities of the existing drainage infrastructure on Watercourse 8. The inventory is summarized in **Table 6**.

Table 6
Watercourse 8 Existing Drainage Infrastructure Inventory & Capacities

Location	Description	Maximum Capacity m^3/s	Approx. Return Period	Typical Design Standard
Lakeshore Road	CSP culvert (0.35m diameter)	0.11 ¹	< 2-Year	25-Year ²
Georgian Trail	Twin CSP culverts (0.7m diameter)	2.5 ¹	< 5-Year	N/A
Highway 26	CSP arch (1.0m x 1.6m)	3.0 ¹	> 100-Year	100-Year ³
Outlet Channel	Channel on Municipally owned land	2.5 ⁴	< 10-Year	N/A

¹ Maximum capacity of culverts operating under head without overtopping road

² Town of the Blue Mountains Design Standard

³ Ministry of Transportation Design Standard

⁴ Outlet channel capacity calculated at 1m depth

3.3 Watercourse 9

Watercourse 9 traverses the Parkbridge Craigleith Ridge Development from Grey Road 19 to Lakeshore Road. Watercourse 9 originates within the tablelands above the Escarpment, and extends across the escarpment face and the subject lands to Georgian Bay.

The portion of the Watercourse 9 watershed, upstream of Grey Road 19 was examined by Higgins Engineering Ltd. in a report titled The Orchards- SWM Implementation Report (Higgins, 2005) to support the proposed The Orchards residential development. Higgins concluded that approximately 116.6 ha of tablelands, escarpment face and development lands contribute to Watercourse 9 upstream of Grey Road 19. Watercourse 9 crosses Grey Road 19 via culvert before entering the Craigleith Ridge development. A portion of the drainage from the Orchards development is conveyed through an existing stormwater management pond before discharging to Watercourse 9 upstream of Grey Road 19.

Through the Parkbridge Development, the Watercourse 9 valley corridor bisects the upper and lower terrace lands into west and east portions. Watercourse 9 is located within a deeply incised ravine across the upper terrace lands and within a defined channel but unconfined valley setting across the lower terrace lands. The upper terrace lands of the Parkbridge development is predominately vegetated with cultural meadows and clusters of trees with series of well-defined drainage draws that discharge to Watercourse 9.

Vegetation across the lower terrace lands of the Parkbridge development consists of cultural meadows and clusters of trees, save and except a more densely treed area located in the vicinity of the toe of the Nipissing Ridge within the western portion of the lower terrace lands.

An existing man made pond is located in the central portion of the Parkbridge site adjacent to the bottom of the ridge. This pond intercepts sheet flow from the ridge and stores the water with a historic outlet structure discharging to Watercourse 9.

Given the lack of a confined valley feature of Watercourse 9 on the lower terrace lands, spill flow escapes the channel overbanks on the east and west side of Watercourse 9 and ponds upstream

of Old Lakeshore Road which is generally low in relief and lacks defined drainage features. This spill flow drains to the south roadside ditches of Old Lakeshore Road which returns the spill water to Watercourse 9. Some of this spill flow to the east is also conveyed to Watercourse 8 and overtops Lakeshore Road in major events.

Downstream of the Nipissing Ridge, Watercourse 9 conveys flows under Lakeshore Road, Georgian Trail, and Highway 26 and ultimately outlets via constructed channel between two dwellings. Downstream of Highway 26 the channel has been constructed with gabion stone and basket walls to Georgian Bay.

In order to support the proposed stormwater strategy for the Parkbridge Development, Crozier completed a hydrologic model of subwatershed 9 existing conditions. The model builds on the hydrologic model of the existing The Orchards development completed by Higgins Engineering covering the upper subwatershed above County Road 19. The existing (pre development) hydrologic flows at Lakeshore Road are summarized in **Table 7**.

Table 7
Watercourse 9 Existing Hydrologic Flows (Crozier Hydrologic Model)

Location	Return Period	Peak Flow (m ³ /s)
Lakeshore Road	2-Year	1.37
	5-Year	2.62
	10-Year	4.01
	25-Year	5.26
	50-Year	5.92
	100-Year	7.31
	Regional	9.07

Existing residential buildings are located adjacent to Watercourse 9 downstream of Highway 26. As such, it was requested by the Town to assess the channel hydraulics of Watercourse 9 downstream of Highway 26 as well as through the Parkbridge development. A HEC-RAS hydraulic model was completed by Crozier for Watercourse 9 traversing the Parkbridge development and downstream of Lakeshore Road to the outlet at Georgian Bay. The HEC-RAS model upstream of Lakeshore Road is included in the Functional Servicing and Stormwater Management Report (Crozier, April 2018). The hydraulic model assessing the drainage infrastructure downstream of the Craigeleith Ridge development is included in **Appendix D**.

The existing residential buildings are approximately 2.8m from Watercourse 9 on the west and approximately 5 meters to the east. The dwelling on the west was noted to have approximately 0.2-0.4m clearance from ground level to first floor, the dwelling on the east was noted to have approximately 0.6-0.8m clearance from ground level to first floor. As such, flow rates that exceed the channel banks would not necessarily result in residential buildings being flooded as the buildings are higher than the channel banks and extreme flows would be dispersed upstream by overtopping Old Lakeshore Road, the Georgian Trail, and Highway 26.

Table 8
Watercourse 9 Existing Drainage Infrastructure Inventory & Capacities

Location	Description	Maximum Capacity m^3/s	Approx. Return Period	Typical Design Standard
Lakeshore Road	Concrete box culvert (1.55m x 1.05m)	2.6 ¹	5-Year	25-Year ²
Georgian Trail	1.5m diameter CSP culvert	3.7 ¹	< 10-Year	N/A
Highway 26	Concrete box culvert (2.45m x 0.9m)	6.0 ¹	> 50-Year	100-Year ³
Outlet Channel	Channel between two existing dwellings	3.5	< 10-Year	N/A

¹ Maximum capacity of culverts operating under head without overtopping road

² Town of the Blue Mountains Design Standard

³ Ministry of Transportation Design Standard

3.4 Watercourse 10

Watercourse 10 is located on the west boundary of the study area. Subwatershed 10 consists of agricultural land across the tablelands, ski hills across the escarpment face, and primarily undeveloped land along the upper and lower terraces of the Nipissing Ridge.

The Watercourse 10 valley corridor is located along the western limits of the lower terrace lands of the Craigleith Ridge Development. As previously stated, along the lower terrace lands, Watercourse 10 is located within a defined channel but unconfined valley setting. An incised drainage draw, located in the western portion of the Craigleith Ridge upper terrace lands, connects into the Watercourse 10 valley corridor.

There are various residential dwellings adjacent to Watercourse 10 downstream of Lakeshore Road on route to Georgian Bay.

Crozier completed a Stormwater Management Implementation Report (2012) supporting the detailed design of the Bannerman Development. Within the report a watershed hydrologic assessment was completed for Watercourse 10. Subsequently, the hydraulic structures for the Lakeshore Road, Georgian Trail, and Highway 26 were assessed for capacity. The results of the hydrologic model and hydraulic capacity assessment are summarized in **Tables 9 & 10**, respectively.

Table 9
Watercourse 10 Existing Hydrologic Flows (Crozier Hydrologic Model)

Location	Return Period	Peak Flow (m^3/s)
Lakeshore Road	2-Year	0.91
	5-Year	1.61
	25-Year	2.97
	100-Year	4.04

Table 10
Summary of Existing Culvert Capacities along Watercourse 10 (Crozier, 2012)

Location	Culvert Dimensions	Maximum Capacity m^3/s	Approx. Return Interval	Typical Design Standard
Lakeshore Road	900 mm Ø CSP	1.4 ¹	<5-Year	25-Year ²
Georgian Trail	750 mm Ø CSP + 900 mm Ø CSP	3.2 ¹	25-Year	N/A
Highway 26	1.25 m by 1.50 m Conc. Box	5.0 ¹	> 100-Year	100-Year ³

¹ Maximum capacity of culverts operating under head without overtopping road

² Town of the Blue Mountains Design Standard

³ Ministry of Transportation Design Standard

It is noted that the Georgian Trail and Highway 26 culverts have sufficient capacity to meet typical standards. The Lakeshore Road culvert was noted to be undersized to convey the full 25-Year event. As a result a portion of flow conveyance is split between the Lakeshore Road culvert and overtopping of Lakeshore Road.

4.0 PROPOSED DEVELOPMENT STORMWATER MANAGEMENT STRATEGY & FUTURE CONDITIONS

4.1 Watercourse 7 & 8

4.1.1. Proposed SWM Design - Home Farm Development

In order to address the existing undefined drainage conditions of the Home Farm site as discussed in Section 3.1, Higgins Engineering has proposed to improve the Watercourse 7 drainage channel to safely convey flows through the site and formalize the drainage on the site. This strategy will improve the local drainage conditions which have historically varied and is generally unpredictable. Thus, any spill flow from Watercourse 7 to subwatershed 8 or subwatershed 6 that is currently occurring above the Nipissing Ridge will be captured, which will improve any localized flooding concerns in these adjacent watercourses.

Drainage from developed lands within the Home Farm Subdivision have been proposed to be directed to full quality/quantity control ponds within the development before being discharged to Watercourse 7. To treat stormwater both north and south of Watercourse 7, two Stormwater Management facilities have been provided.

Details of each facility as described in the Higgins Engineering Functional Servicing Report and Stormwater Management Report (2016) have been outlined below:

North Pond

The proposed north stormwater management facility will serve as an end-of-pipe wet pond providing quality, quantity, and erosion control for an area of 11.49ha. The wet pond will be implemented to provide pre to post peak flow attenuation for all storms up to the 100-year.

South Pond

The proposed south stormwater management facility will serve as an end-of-pipe wet pond providing quality, quantity, and erosion control for an area of 9.40ha. The wet pond will be implemented to provide pre to post peak flow attenuation for all storms up to the 100-year.

Infiltration Basin

An infiltration basin is proposed to provide additional stormwater controls for an area of 0.82ha. The infiltration basin is proposed to be sized to store the entire 100-Year storm.

The stormwater management facilities are proposed to achieve pre to post peak flow attenuation up to and including the 100-Year storm which will maintain the existing flow regime of Watercourse 7.

4.1.2. Proposed Development SWM Design - Parkbridge

The Parkbridge site contributes very little drainage areas to Watercourse 7 in the pre-development condition. This has been maintained in the post developed condition as flows from developed portions of the site have been directed toward internal storm sewer and stormwater management facilities that outlet to Watercourse 9. Similarly, the subwatershed 8 area will be reduced in the post development condition due to site grading as developed areas within subwatershed 8 will be directed toward the stormwater management facilities and ultimately Watercourse 9. Subwatershed 8 flows from the upper terrace and the Nipissing Ridge will be conveyed through the Parkbridge site via storm sewer to Lakeshore Road.

4.2 Watercourse 9

4.2.1. Proposed SWM Design – Home Farm Development

As outlined in the Functional Servicing and Stormwater Management Report (Higgins, 2016), the Home Farm development does not propose to contribute any post development runoff to Watercourse 9. Thus, no impacts to Watercourse 9 is expected to result from the Home Farm Development.

4.2.2. Proposed SWM Design – Parkbridge Development

Preliminary hydrologic design was completed and summarized in the Functional Servicing and Stormwater Management Report (Crozier, April 2018).

The proposed Parkbridge SWM facilities have been designed to provide the amount of peak flow quantity control needed in order to maintain or reduce peak flows based on pre-development conditions, with results discussed below. Two Stormwater Management (SWM) Facilities (SWM Facility #1, SWM Facility #2) are proposed to provide quality and quantity control for the Craigleith Ridge development.

SWM Facility #1 is proposed to be constructed from the dugout pond at the base of the Nipissing Ridge and converted into a wetland facility with half of the existing pond being used as the operating SWM facility and half remaining in existing condition. SWM Facility #1 will service the upper terrace lands totaling approximately 3.1ha.

SWM Facility #2 is proposed to be located on the east side of Watercourse 9 and service the majority of the lower terrace lands totaling approximately ha. The pond will be constructed as a wet pond providing quality and quantity control.

A portion of the west lands (2.26ha) will be piped under Watercourse 9 and drain to SWM #2, while a portion of the west lands (1.75ha) drain to Watercourse 9 uncontrolled following stormwater quality treatment.

Post-development hydrologic modeling was completed by Crozier and documented in the Functional Servicing and Stormwater Management Report (Crozier, April 2018). A summary and comparison of pre and post-development peak flows is provided below in **Table 11**.

Table 11
Watercourse 9 Post-Development Hydrologic Flows

Location	Return Period	Peak Flow (m ³ /s)		% Difference
		Pre-Development	Post-Development	
Lakeshore Road	2-Year	1.369	1.308	-4.5%
	5-Year	2.617	2.463	-5.9%
	10-Year	4.007	3.730	-6.9%
	25-Year	5.259	5.042	-4.1%
	50-Year	5.917	5.680	-4.0%
	100-Year	7.313	6.976	-4.6%
	Regional	9.070	8.671	-4.4%

As shown above in **Table 11**, post-development peak flows at the Watercourse 9 crossing (and downstream) will be reduced from pre-development levels thereby improving the flood conditions downstream of the subject site, between Lakeshore Road and Georgian Bay.

Further to the reduction of peak flows, comparison of the pre and post development flow hydrographs at Lakeshore Road indicate that the duration of extreme flows (i.e. in excess of the 3.5 m³/s outlet channel capacity) is not increased, thus, no prolongation of flood conditions will be resulting from the Parkbridge development. The pre and post development flow hydrographs have been included in the Functional Servicing and Stormwater Management Report (Crozier, April 2018).

4.3 Watercourse 10

4.3.1. Proposed SWM Design – Parkbridge Craigleith Ridge Development

Based on the proposed Craigleith Ridge development plan, approximately 0.23ha of drainage area will be redirected from Watercourse 10 to Watercourse 9. Furthermore, no post development drainage areas from the Parkbridge development will discharge to Watercourse 10. As a result, the existing hydrology of Watercourse 10 will be maintained by the Craigleith Ridge development.

4.4 Summary

Under the proposed post-development conditions, the Parkbridge Craigleith Ridge and MacPherson developments will implement on-site stormwater management facilities to maintain existing flow conditions of the receiving watercourses.

The Home Farm development will discharge all development area to Watercourse 7 with no development area from the Home Farm site proposed to discharge to Watercourse 8 or 9.

The Craigleith Ridge development will discharge all development area to Watercourse 7 with no development areas proposed to discharge to Watercourse 7, 8, or 10.

Table 8 outlines the proposed post-development conditions of each subwatershed, outlining the total drainage area of each and the development areas of Home Farm and Craigleith Ridge

developments draining to each watercourse. The subwatershed flow rates are also summarized.

Table 12
Watercourse 9 Post-Development Hydrologic Flows

Watercourse	Drainage Area (ha)	Proposed Craigleith Ridge Developed Area discharging to Watercourse (ha)	Proposed Home Farm Developed Area discharging to Watercourse (ha)	Regional Flow Rate (m³/s)	100-Year Flow Rate (m³/s)
7	180.8	0	21.7	7.39	9.72
8	8.2	0	0	1.09	0.84
9	147.9	13.5	0	8.671	6.976
10	61.0	0	0	-	4.04

5.0 FLOOD CONVEYANCE OPPORTUNITIES

Based on the discussion presented in the preceding sections there currently exists various flooding issues with each watercourse including spill flows from Watercourse 7 to 6, Watercourse 7 to 8 and Watercourse 9 to 8. As previously discussed part of the objective of this report is to analysis a comprehensive flood management solution for Watercourse 7, 8, 9, and 10. An evaluation of possible infrastructure improvements to increase conveyance capacity for Watercourses 7, 8 and 9 are presented in section 5.1, 5.2, 5.3 respectively.

5.1 Watercourse 7

As noted earlier, the outlet to Watercourse 7 downstream of Highway 26 passes through a narrow channelized section between two existing residences on private property. Given the constraints of this area it was identified as a flood damage center with the original subwatershed study completed in 1993 (GSCA).

Since that time, efforts to improve the flood susceptible nature of downstream properties have been implemented. These works consist of a flow diversion upstream of Highway 26 which takes flows from Watercourse 7 through an elliptical flow pipe to divert flows from Watercourse 7 westward towards Watercourse 8.

As the downstream reach of Watercourse 7 is within private property and is the most flood susceptible, options to increase conveyance capacities of the multiple roadway and trail crossings upstream would only exacerbate existing issues. Further, the location of existing building structures adjacent the Watercourses effectively limits the opportunities to substantially increase the channel capacities given the proximity of existing structural elements of the buildings.

5.2 Watercourse 8

Watercourse 8 was determined to have good opportunities for increased conveyance of flows to Georgian Bay from upstream areas. Flows from Watercourse 8 upstream of Lakeshore Road are intermittent and conveyed through a small diameter CSP cross culvert. However, downstream of Lakeshore Road both the crossing culverts beneath the Georgian Trail and Highway 26 have considerably larger capacities and no adjacent residential structures. The outlet of Watercourse 8 between Highway 26 and Georgian Bay is also contained within Municipal ownership. There are no existing residences or structures in the vicinity of Watercourse 8 downstream of Lakeshore Road.

Between Lakeshore Road and Highway 26, Watercourse 8 is lowest in elevation compared to Watercourse 7 and Watercourse 9. The existing Lakeshore Road profile falls gradually from Watercourse 9 to Watercourse 8 from the west, as well as from Watercourse 7 to Watercourse 8 from the east. Due to the lower profile of the downstream reaches of Watercourse 8, opportunities for flow diversion from Watercourse 7 and 9 to Watercourse 8 are identified as potential flood relief opportunities.

5.3 Watercourse 9

The outlet of Watercourse 9 passes beneath culverts at Lakeshore Road, the Georgian Trail and Highway 26 as it makes its way towards Georgian Bay. Between Old Lakeshore Road and the Georgian Trail the channel passes through undeveloped lands that have also been purchased by Parkbridge. Downstream of Highway 26 the Watercourse 9 channel passes through private

properties which have historically channelized the Watercourse. This limits opportunities for upsizing of upstream roadway crossings due to the presence of the existing dwellings. However, unlike Watercourse 7 the outlet channelization has maintained a channel width of approximately 2.5m, roughly equivalent to width of the Highway 26 crossing culvert. The channel banks have further been protected from erosion and are constructed of gabion baskets which have been maintained in good repair. Hydraulic analysis of this section has indicated that normal flow, below the 10 year rainfall event are contained within the channel. Flows above the 10 year rainfall event exceed the capacity of the channel, however, the existing structures are setback from the channel with finished floor elevations well above the surrounding ground.

Given the setbacks to the existing Watercourse 9 outlet channel, there is a greater potential for Watercourse 9 outlet improvements as compared to Watercourse 7. Watercourse 9 outlet improvements (i.e. widening, deepening) may be possible to improve the flooding risk of the local private dwellings.

5.4 Watercourse 10

The Parkbridge Craigleith Ridge and MacPherson Home Farm developments do not propose to discharge the stormwater flows of any development areas to Watercourse 10. As a result, the existing flow conditions of Watercourse 10 will be maintained. As discussed in Section 3.4 the downstream drainage infrastructure has sufficient capacity to meet relevant design criteria. As such, further assessment of Watercourse 10 is not included within the subject report.

6.0 PROPOSED FLOOD CONVEYANCE STRATEGY

With the implementation of development on the subject MacPherson and Parkbridge lands exists the opportunity to address and formalize a solution to a number of existing watershed issues. These strategies are outlined further in the respective sections below.

6.1 Watercourse 7 & 8

6.1.1. Proposed Flood Management Strategy

The potential of improving the Watercourse 7 outlet channel was determined to be of low probability given the proximity of the existing residences. Any improvements to the channel dimensions would pose constructability constraints due to limited access and would likely require structural alteration to one or both of the existing residences. As a result, this approach was determined to have a low overall benefit to the regional flooding conditions.

Given the downstream conveyance constraints within Watercourse 7 below Highway 26 and the distinct opportunity to improve capacity in the outlet of Watercourse 8, an examination on the feasibility of directing a majority of flows from Watercourse 7 to Watercourse 8 was undertaken.

A hydraulic assessment of all structures within each watercourse was completed to determine the available capacities and reasonable amount of flow that could be diverted. On the Watercourse 8 system it was determined that the available capacity of the Highway 26 cross culvert of under MTO jurisdiction was approximately 3.0 m³/s. Additional capacity at this crossing could be obtained by supplementing the capacity with a second culvert barrel or replacement with a larger culvert. However, utilizing overtopping flow conveyance across the Highway would be a much more cost effective alternative.

It was noted that in existing conditions Watercourse 7 overtops Highway 26 when flows greater than 5 m³/s are experienced. This overtopping is broad and would direct flows to lower yard areas of existing residences downstream of the Highway 26 adjacent Watercourse 7 contributing to the flood risk of these properties. The properties downstream of Highway 26 are lower in elevation than the Highway 26 road profile, thus, any overtopping at this location is not favorable.

Conversely, in the vicinity of Watercourse 8 the overland flow route across the Highway is not constrained by existing residences which are flood susceptible. Flows overtopping Highway 26 adjacent Watercourse 8 would be collected by the downstream roadside ditch and pass through a Municipally owned property where the current outlet channel is located. Further, future residential development areas downstream of the Highway should be constructed higher than the Highway 26 roadway elevation to keep flows out of private property and within the public corridors. The current fill levels of residential properties on both sides of Watercourse 8 are favorable to this approach.

As such, by limiting the flow within Watercourse 7 to the outlet capacity (1.2 m³/s) and moving the surplus flows of Watercourse 7 to Watercourse 8 would assist with improvements to flood conditions in the general area.

To accomplish this task, a conceptual relief flow channel design was developed to remove extreme flows from Watercourse 7 and its susceptible downstream reaches and divert them to the adjacent Watercourse 8. The proposed diversion consists of a secondary flood relief channel to

be established at the southeast limits of the Parkbridge property and convey flows north and westward toward Watercourse 8. At Lakeshore Road, the southern ditch would be formalized and the existing 350mm diameter CSP cross culvert would be upgraded to allow for more conveyance beneath the roadway while surplus flows would be conveyed overtopping Old Lakeshore Road at the existing low point and directed towards Watercourse 8.

Downstream of Old Lakeshore Road, Watercourse 8 flows through a very narrow section of private property (213 Old Lakeshore Road) that is part of an existing single family lot with the dwelling located east of Watercourse 7. This property owner would need to be consulted regarding the drainage redirection which would benefit them and lessen the flood / erosion risk of the existing residence adjacent to Watercourse 7. Alternatively, the Municipality may consider obtaining the lands to improve drainage conditions to the local area.

Once flows have been redirected to Watercourse 8 they can use the existing conveyance infrastructure and overland flow route to Georgian Bay without impact to surrounding residences. Refer to **Figure 8** for a conceptual design of the flow diversion route. Capacity calculations for various infrastructure components are included in **Appendix D**.

6.2 Watercourse 9

6.2.1. Proposed Flood Management Strategy

As outlined in Section 4.2.2., the proposed stormwater management facilities on the Parkbridge site will reduce the severity and frequency of flows experienced by the downstream channel. The water quantity control criteria for the Parkbridge site will be to match or reduce pre development flows rates for all storms including the Regional Timmins storm so that downstream flooding conditions will be maintained or be improved.

Given the unconfined nature of the existing Watercourse 9 channel and various spill flow conditions across the lower terrace lands of the Craigleith Ridge site, the proposed site grading will confine the spill flow to the Watercourse 9 channel. This has the potential of increasing the peak flows experienced downstream if left unmitigated.

To help mitigate the downstream flooding risk of Watercourse 9, a flow relief channel may be designed to divert flows to Watercourse 8. A channel may be graded between Old Lakeshore Road and Georgian Trail to convey flow to Watercourse 8 within Parkbridge owned lands and the Georgian Trail right-of-way. This channel will capture flows overtopping Lakeshore Road during extreme flow events and convey this flow westward to Watercourse 8. Given the existing culvert inverts there is approximately 0.6% slope from Watercourse 9 invert downstream of Old Lakeshore Road to the Watercourse 8 invert upstream of Georgian Trail. The magnitude of flow diversion chosen is dependent on the preferred level of flood proofing for the downstream channel.

Additional flood mitigation strategies can be employed downstream of Highway 26 where opportunities for outlet channel improvements are present. Assessment of the Watercourse 9 outlet channel configuration determined that a channel widening of 0.5m on both sides will result in a capacity of approximately 6.0m³/s, which is equivalent to the existing Highway 26 culvert. A widening of 1.0m on both side of the channel will result in a capacity which meets the Regional peak flow (9.1m³/s). Unlike Watercourse 7, the outlet to Watercourse 9 presents a greater opportunity for improvements due to the available space between existing residential dwellings.

7.0 EVALUATION OF OPTIONS

Based on the preceding discussion and historic correspondence with the Town of the Blue Mountains and Grey Sauble Conservation Authority, Crozier presents four potential flood relief options for the Craigleith Area for consideration.

7.1 Summary of Options

Option 1: Divert all flows exceeding downstream capacities to Watercourse 8

Option 1 proposes to divert all flows in exceedance of Watercourse 7 & 9 capacities to Watercourse 8 outlet. The Watercourse 7 and Watercourse 9 outlets will be maintained in existing conditions with no capacity improvements to either outlet proposed. Flows exceeding Watercourse 7 outlet capacity ($1.2 \text{ m}^3/\text{s}$) will be diverted to Watercourse 8 via existing lateral relief pipe and proposed flood relief channel upstream of Old Lakeshore Road. Similarly, the flows from Watercourse 9 that are in exceedance of the Watercourse 9 outlet ($3.5 \text{ m}^3/\text{s}$) will be diverted to Watercourse 8 via proposed flood relief channel between Old Lakeshore Road and Georgian Trail.

The Highway 26 culvert at Watercourse 8 will be upgraded to convey the 100-Year flow, which is approximately $11 \text{ m}^3/\text{s}$ following the proposed flow diversions from Watercourse 7 and 9. The existing Watercourse 8 outlet channel will be widened to accommodate the diverted Regional flow of $15.2 \text{ m}^3/\text{s}$. Given the size of the proposed culvert upgrade, an open cut installation would be required on Highway 26.

Refer to **Figure 5** for the Option 3 Drainage Network.

Option 2: Improve Watercourse 9 outlet to $6.0 \text{ m}^3/\text{s}$, divert remaining flow to Watercourse 8

Option 2 proposes to widen the Watercourse 9 outlet channel to match the culvert capacity of Highway 26 ($6.0 \text{ m}^3/\text{s}$) and divert the remainder to Watercourse 8. The outlet channel widening is to be 0.5m on both sides of the channel.

The diversion channel from Watercourse 9 to Watercourse 8 remains, however, provides a lower flow conveyance capacity due to the increased outlet capacity downstream.

Flows exceeding Watercourse 7 outlet capacity be diverted to Watercourse 8 via existing lateral relief pipe and proposed flood relief channel as in Option 1.

The Highway 26 culvert at Watercourse 8 will be upgraded to convey the 100-Year flow, which is approximately $8.4 \text{ m}^3/\text{s}$ following the proposed flow diversions from Watercourse 7 and 9. The existing Watercourse 8 outlet channel will be widened to accommodate the diverted Regional flow of $12.7 \text{ m}^3/\text{s}$. Given the size of the proposed culvert upgrade, an open cut installation would be required on Highway 26.

Refer to **Figure 6** for the Option 3 Drainage Network.

Option 3: Improve Watercourse 9 outlet to convey Regional Flow

Under Option 3 it is proposed to widen the Watercourse 9 outlet channel to convey the Regional

flow ($9.1\text{m}^3/\text{s}$). No flow from Watercourse 9 will be diverted to Watercourse 8. The Highway 26 culvert at Watercourse 9 will be upgraded to convey the 100-Year flow ($7.3\text{m}^3/\text{s}$). The outlet channel widening is to be 1.0m on both sides of the channel.

Flows exceeding Watercourse 7 outlet capacity be diverted to Watercourse 8 via existing lateral relief pipe and proposed flood relief channel as in Option 1 & 2.

The Highway 26 culvert at Watercourse 8 will be upgraded to convey the 100-Year flow, which is approximately $8.4\text{m}^3/\text{s}$ following the proposed flow diversion from Watercourse 7. The existing Watercourse 8 outlet channel will be widened to accommodate the diverted Regional flow of $9.3\text{m}^3/\text{s}$. Given the size of the proposed culvert upgrade, an open cut installation would be required on Highway 26.

Refer to **Figure 7** for the Option 3 Drainage Network.

Option 4: Maintain Existing Spill Flow Conditions

Under Option 4 it is proposed to further quantify and maintain existing spill flow characteristics that are currently occurring throughout the study area. It is noted that both the Home Farm and Craigleith Ridge developments have implemented stormwater management facilities as part of the development concepts, which will provide stormwater quantity control to respect the downstream properties.

Spill flows currently occurring from Watercourse 7 to Watercourse 6 (at Eden Oak), Watercourse 7 to Watercourse 8 (at Home Farm), and Watercourse 9 to Watercourse 8 (at Parkbridge) will be maintained and thus, downstream flow conditions will be maintained under existing conditions. Under Option 4, no downstream flow conveyance infrastructure improvements are proposed.

Refer to **Figure 4** for an outline of the Existing Flow Conditions.

7.2 Evaluation of Alternatives

Resulting from the preceding discussion, an evaluation matrix has been produced to help qualify each of the proposed options. **Table 13** outlines the key opportunities and constraints presented by each option.

Table 13
Evaluation Matrix for Options

Option	Opportunities	Constraints
Option 1 Divert all exceeding flows to WC8	<ul style="list-style-type: none"> • Extreme flows diverted away from existing residential dwellings in flood susceptible areas (WC7 & WC9). • No disturbance to existing private property at WC7 & WC9 outlets. • Minimal Highway 26 disturbance for culvert upgrade (single location at WC8). 	<ul style="list-style-type: none"> • Largest requirement for flood relief channel from WC9 to WC8. • Largest culvert upgrade for Highway 26 at WC8. • Proposed WC 7 relief channel passes through undeveloped private property between Lakeshore Rd. and Georgian Trail. • Size of culvert improvement under Highway necessitates open cut installation.
Option 2 Improve WC 9 outlet to 6.0m ³ /s, divert remaining to WC8	<ul style="list-style-type: none"> • Extreme flows diverted away from existing residential dwellings in flood susceptible areas (WC7 & WC8). • Reduced flows diverted to WC8 decreases culvert upgrade requirement. • Reduced conveyance requirement for flood relief channel from WC9 to WC8. • Minimal Highway 26 disturbance for culvert upgrade (single location at WC8). 	<ul style="list-style-type: none"> • Requires disturbance to private property at WC9 outlet. • Proposed WC 7 relief channel passes through undeveloped private property between Lakeshore Rd. and Georgian Trail. • Size of culvert improvement under Highway necessitates open cut installation.
Option 3 Improve WC 9 outlet to convey Regional Flow	<ul style="list-style-type: none"> • Extreme flows diverted away from existing residential dwellings in flood susceptible areas (WC7). • Reduced flows diverted to WC8 decreases culvert upgrade requirement. • Eliminates flood relief channel from WC9 to WC8. 	<ul style="list-style-type: none"> • Requires disturbance to private property at WC9 outlet. • Requires most instances of Highway 26 disturbance for culvert upgrades (at WC8 & WC9). • Size of culvert improvement under Highway necessitates open cut installation.
Option 4 Maintain Existing Spill Flow Conditions	<ul style="list-style-type: none"> • No downstream improvements to Lakeshore Road, Highway 26, or outlets (maintain existing). 	<ul style="list-style-type: none"> • Does not improve to existing flooding conditions downstream.

8.0 CONCLUSIONS & RECOMMENDATIONS

The analysis presented in this report outlines the existing flooding conditions as well as possible opportunities and options to address the existing flooding conditions. Based on this analysis, our conclusion and recommendations include the following.

- Conveyance of flows from Watercourse 7 to 8 and Watercourse 9 to 8 should continue to occur, by way of designed channels or maintaining existing spill flows.
- Existing Infrastructure should be improved between the Base of the Nippissing Ridge and Georgian Bay to improve conveyance capacities.
- Both the Parkbridge and Home Farm developments should continue to provide post-development to pre-development quantity control to avoid increasing downstream flows.
- Option 1 is the recommended alternative as Watercourse 8 was deemed to have the highest opportunity for improving conveyance infrastructure and can accommodate high flows from Watercourse 7 and 9. Furthermore Option 1 involves the least disturbance to private land owners.
- As flood waters are conveyed through various landowners (Town, MTO and Private lands) obtain permission/approval to construct the required infrastructure requirements is a significant aspect to implementing any of the Option, including Option 1. As such it is recommended to initiate dialogue and obtain feedback from the Town, MTO and private landowners in the area regarding the proposed flood mitigation plan. Based on responses from the land owners the proposed options may be re-evaluated.

Respectfully submitted,

C.F. CROZIER & ASSOCIATES INC.

DRAFT

Jonathan M. Proctor, P.Eng.
Associate

C.F. CROZIER & ASSOCIATES INC.

DRAFT

Brad Dickieson, EIT.
Engineering Intern

JP/BH/bd
J:\1000\1046-Parkbridge Lifestyle\4031-Craigleith Fogal Land Acq\Reports\Regional Sm Plan\2018.03.15 - Reg SWM Plan Draft.docx

C.F. CROZIER & ASSOCIATES INC.

DRAFT

Brendan Hummelen, P.Eng.
Project Engineer

APPENDIX A

Terms of Reference

DECEMBER 4TH, 2017

PROJECT NO: 1046-4031

SENT VIA: EMAIL

BWORSLEY@THEBLUEMOUNTAINS.CA

Town of The Blue Mountains
32 Mill Street, Box 310
Thornbury, ON N0H 2P0

**Attention: Brian Worsley, P.Eng.
Manager of Engineering**

**RE: UPDATED TERMS OF REFERENCE – STORMWATER MANAGEMENT STUDY
PARKBRIDGE LIFESTYLE COMMUNITIES INC.
TOWN OF THE BLUE MOUNTAINS, GREY COUNTY**

Dear Brian,

For your consideration, we are pleased to submit our Terms-of-Reference (TOR) for engineering services related to the preparation of a Stormwater Management Regional Plan examining combined solutions for Stormwater / Floodplain management for watercourse 7, 8, 9, & 10.

1. Purpose

It is understood that the Town of The Blue Mountain has requested a supplemental analysis as part of the Parkbridge Craigleith and MacPherson Home Farm properties illustrating the optimal floodplain management solution for the local area. This study will build upon the finding the Grey Sauble Conservation Authorities Subwatershed Study (1993) recognizing the historic identification of a flood damage center for Watercourse 7 at its outlet downstream of Highway 26.

2. Work Plan

Study Limits

This assessment will focus on Watercourse 7, 8, 9, & 10 in, through and downstream of the Parkbridge and Home Farm developments. As it is recognized the proposed developments are proposing full stormwater management quality / quantity controls onsite the study will focus on assessing identified flooding areas and/or capacity constraints downstream of the noted developments to Georgian Bay such that post development outlet rates consider the downstream capacity.

2.1. Phase 1 – Flood Risk Identification

Crozier and Associates has completed various hydraulic floodplain studies along the subject tributaries. It is generally known that a number of these watercourses spill along

their downstream limits on route to Georgian Bay expanding flood potential to the general area. The proposed Study will review and identify these documented flood / spill susceptible areas with and downstream of proposed developments.

2.2. Phase 2 – Flood Conveyance Opportunity Review

Given the downstream position of the subject lands in the respective watersheds, providing safe conveyance of flows to Georgian Bay is the optimal method to address flooding concerns. The study will examine opportunities to increase and / or optimize the conveyance of flows to Georgian Bay to eliminate chronic flooding areas. As such, capacity of conveyance routes / infrastructure adjacent areas identified within Phase 1 will be analysed for performance in major storm events (100 year, Regional). Additionally, consideration will be given to the pre and post development erosion power versus hours (probability density function).

Typical conveyance routes / infrastructure that will be addressed includes:

- Natural Watercourse Channels
- Municipal Ditches / Drains
- Culverts
- Overland Flow Routes

Based on the above assessment, the feasibility of utilizing existing watercourses / infrastructure for conveyance of flows will be assessed.

2.3. Phase 3 – Flood Conveyance Improvements

Based on the results of the above noted phases, recommendations for floodplain improvements within the subject Watershed will be analysed. This may include the recommendation to optimize existing conveyance and infrastructures capacities or to provide additional capacity to promote more efficient and safe conveyance to Georgian Bay.

Preliminary designs and calculations of proposed flood improvements will be included to demonstrate the design principle behind each solution to alleviate flood susceptible areas. Figures which demonstrate the preliminary design intent will be prepared. Lastly, timing and triggers for implementation of improvements will also be assessed.

2.4. Phase 4 – Documentation

Documentation of all findings and recommendations will be included in a Stormwater Regional Plan Report for submission to the Town of The Blue Mountains, County and Grey Sauble Conservation Authority for review. This report will include relevant figures and calculations supporting the proposed study.

3. Conclusions

We look forward to working with you on this project. Should you have any questions, please do not hesitate to contact the undersigned.

Yours truly,

C.F. CROZIER & ASSOCIATES INC.



Jon Proctor, P.Eng
Associate

J:\1000\1046-Parkbridge Lifestyle\4031-Craigleith Fogal Land Acq\Letters\2017.12.04 Parkbridge TOR for SWM Analysis.docx

APPENDIX B

Study Area Existing Conditions



Study Area - Existing Conditions

Legend

- Parcels
- Large Scale Roads
 - Provincial Highway
 - County Road
 - Township Road
 - Seasonal Road



0.32 0 0.16 0.32 Kilometers

WGS_1984_Web_Mercator_Auxiliary_Sphere
© County of Grey



This map is a user generated static output from an Internet mapping site and is for reference only.
Data layers that appear on this map may or may not be accurate, current, or otherwise reliable.

Printed: April 27, 2018

THIS MAP IS NOT TO BE USED FOR NAVIGATION

Notes



Study Area - Soils

Legend

Parcels

Large Scale Roads

Provincial Highway

County Road

Township Road

Seasonal Road

SOIL (OMAFRA / MNR)

0

1

2


3

4

5

6

7

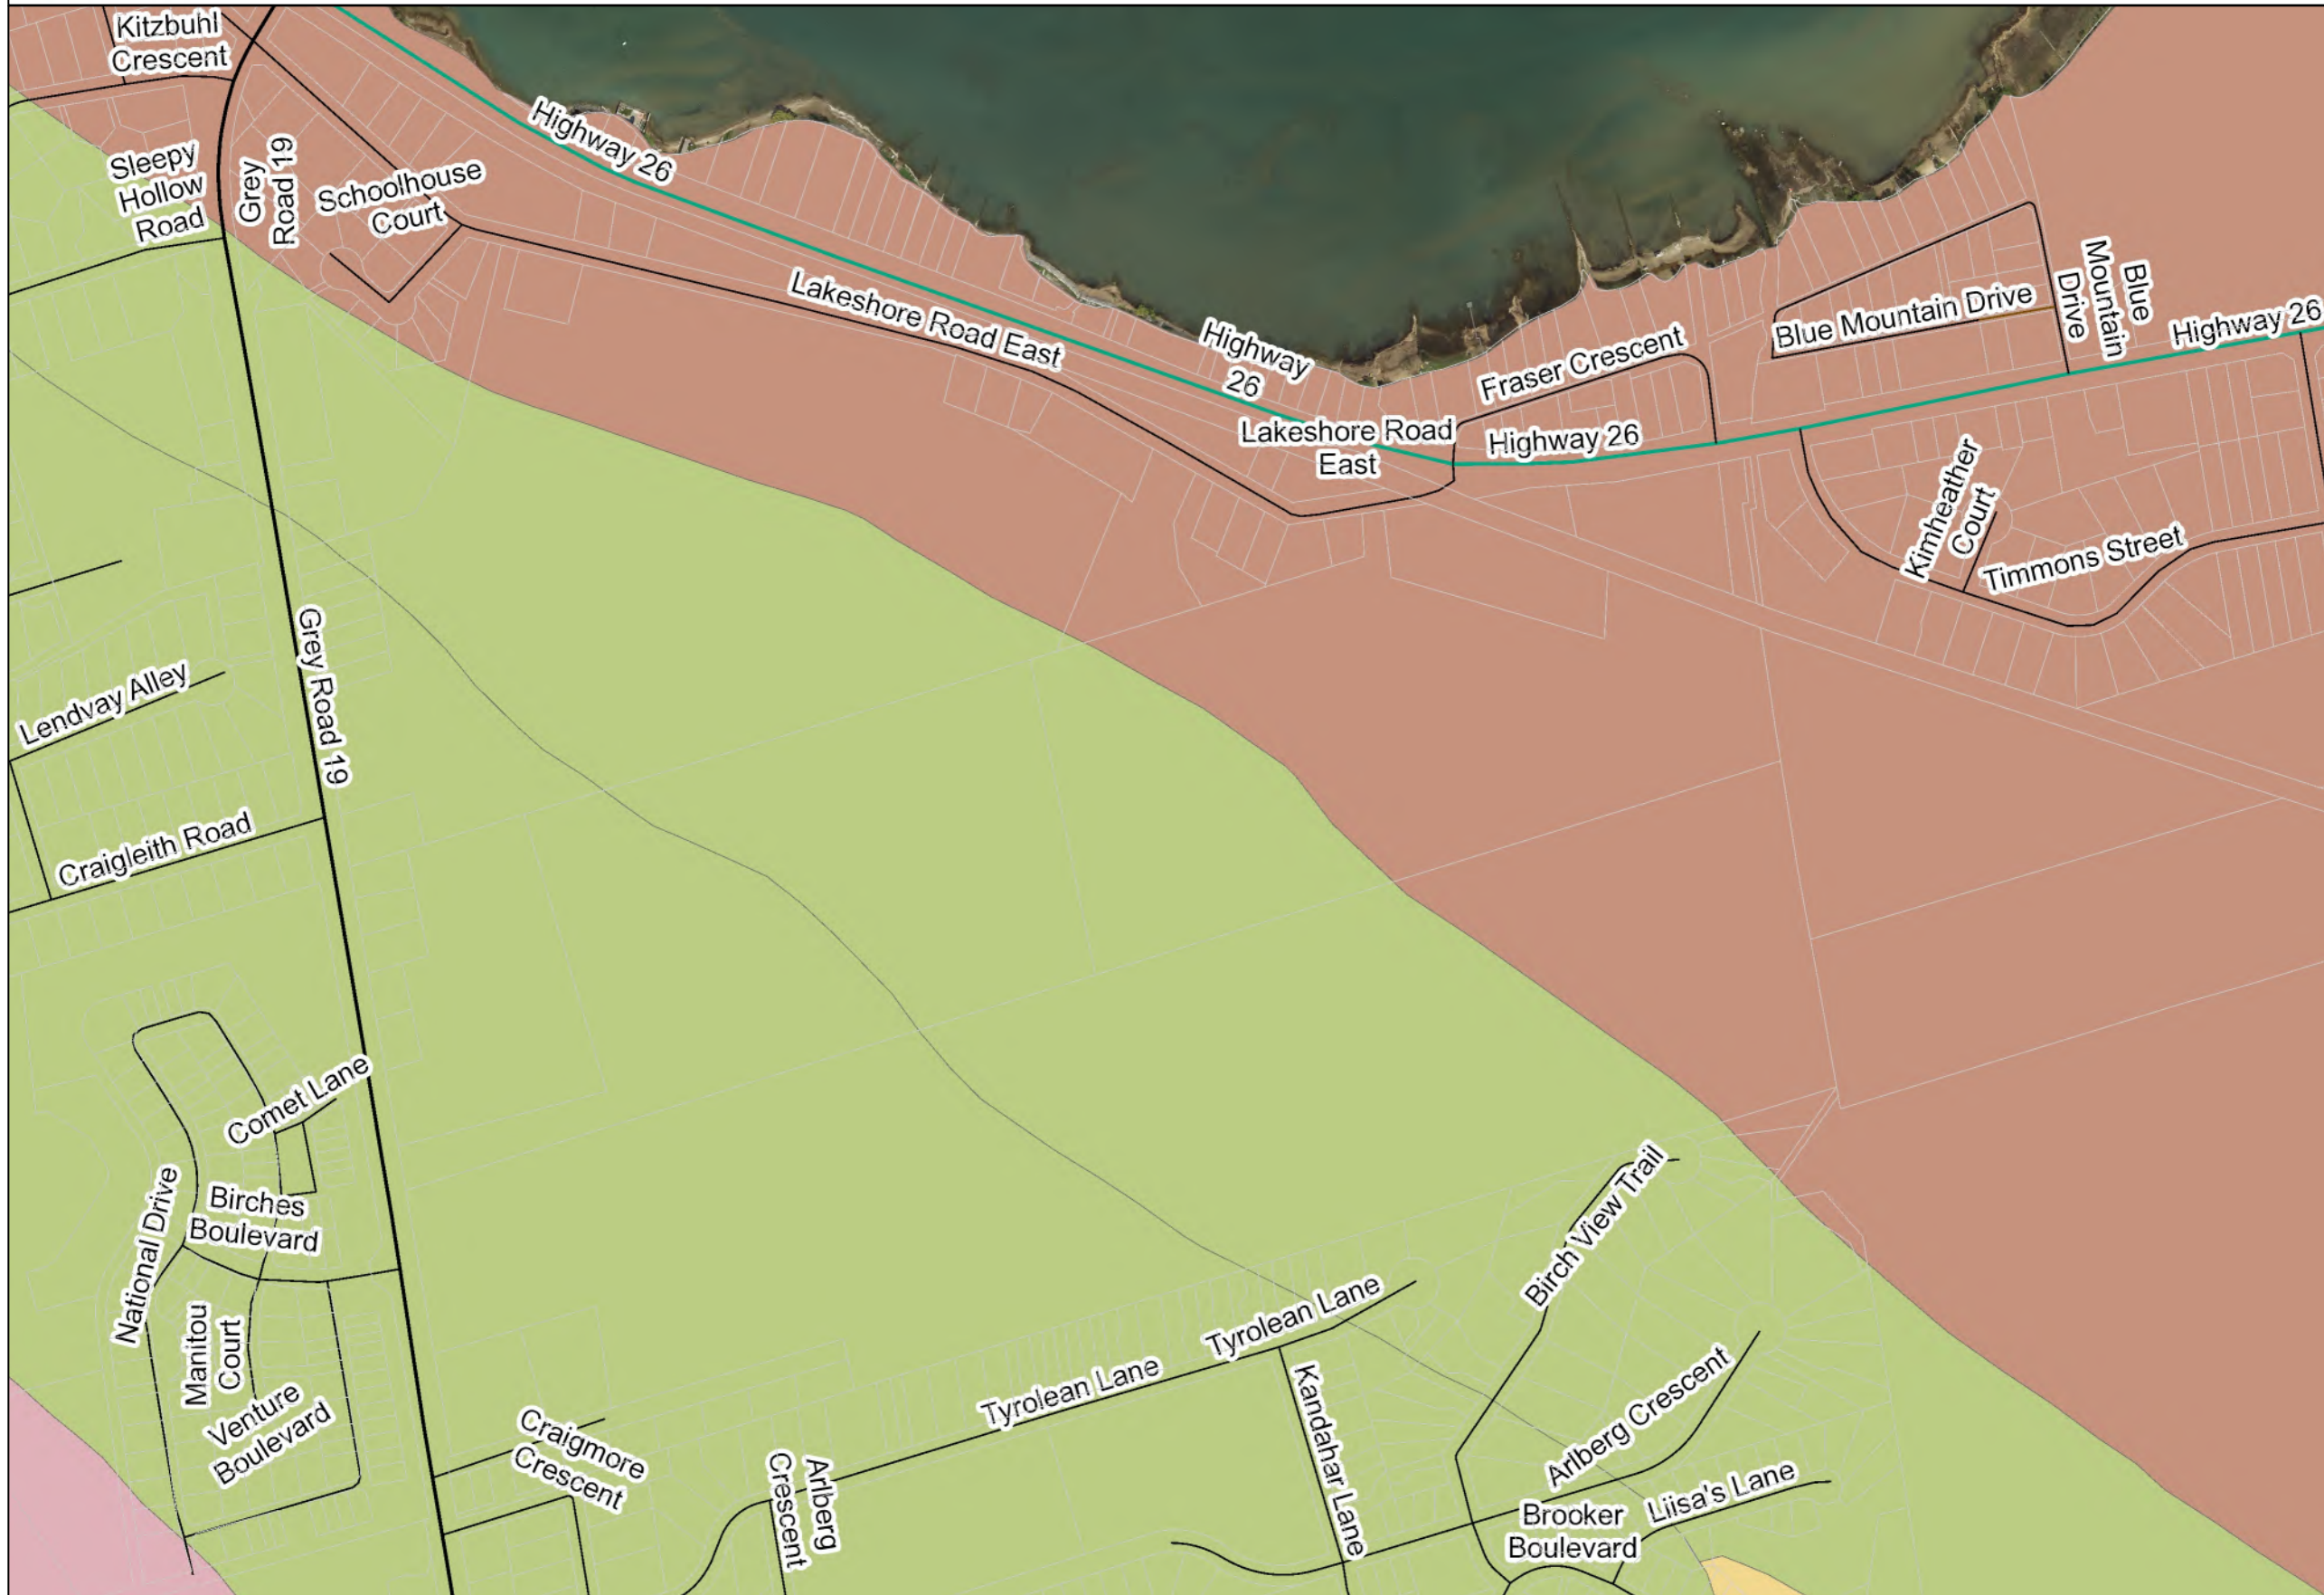

0.32 0 0.16 0.32 Kilometers

WGS_1984_Web_Mercator_Auxiliary_Sphere
© County of Grey



This map is a user generated static output from an Internet mapping site and is for reference only.
Data layers that appear on this map may or may not be accurate, current, or otherwise reliable.

Printed: April 27, 2018

THIS MAP IS NOT TO BE USED FOR NAVIGATION

Notes

APPENDIX C

Site Photos

DRAFT

Watercourse 7

7.1 WC7 Spill Flow on Upper Terrace (Home Farm)

2016.03.31



7.2 WC7 Spill Flow on Upper Terrace (Home Farm)

2016.03.31



7.3 WC7 Spill Location Eden Oak

2016.03.31



7.4 WC7 Upstream Lakeshore Road

2016.03.31



7.5 WC7 Downstream Lakeshore Road

2016.03.31



7.6 WC7 Upstream Georgian Trail

2016.03.31



7.7 WC7 Downstream Georgian Trail

2016.03.31



7.8 WC7 Downstream Georgian Trail

2016.03.31



7.9 WC7 Outlet

2016.03.31



Watercourse 8

8.1 WC8 Upstream of Lakeshore Road

2016.03.31



8.2 WC8 Upstream of Lakeshore Road

2016.03.31



8.3 WC8 Downstream of Lakeshore Road

2016.03.31



8.4 WC8 Downstream of Georgian Trail

2016.03.31



8.5 WC8 Upstream of Highway 26

2016.03.31



8.6 WC8 Downstream of Highway 26 (Outlet)

2016.03.31



Watercourse 9

9.1 WC 9 Upstream of Lakeshore Road (Overbank berm)

2018.04.25



9.2 WC 9 Location of Spill flow to WC8 Upstream Lakeshore

2018.04.25



9.3 WC 9 Lakeshore Road South Ditch (facing east)

2018.04.25



9.4 WC9 Upstream of Lakeshore Road

2016.03.31



9.5 WC9 Upstream of Lakeshore Road

2016.03.31



9.6 WC9 Downstream of Georgian Trail

2016.03.31



9.7 WC9 Downstream of Highway 26

2016.03.31



9.8 WC9 Downstream of Highway 26

2016.03.31



9.9 WC9 Outlet channel between existing houses

2016.03.31



APPENDIX D

Existing Hydraulic Structures Inventory & Calculations

WATERCOURSE 7 – CULVERTS

LAKESHORE ROAD

Description:	Concrete Box Culvert
Size:	0.95m rise x 1.9m span
Upstream invert:	181.51m
Downstream invert:	181.28m
Length:	9m
Slope:	2.5%
Road Deck Elevation:	182.74m



GEORGIAN TRAIL

Description:	Twin CSP Culvert
Size:	Circular 1200mm dia.
Upstream invert:	179.04m
Downstream invert:	179.50m
Length:	10.5m
Slope:	5.14%
Road Deck Elevation:	180.57m



HIGHWAY 26

Description:	CSP Arch
Size:	0.9m rise x 1.35m span
Upstream invert:	178.40m
Downstream invert:	177.89m
Length:	22m
Slope:	2.32%
Road Deck Elevation:	179.64m



LATERAL DIVERSION PIPE (WC 7 to WC8)

Description:	Concrete Pipe Arch
Size:	0.9m rise x 1.5m span
Upstream invert:	178.41m
Downstream invert:	177.70m
Length:	115m
Slope:	0.62%
Road Deck Elevation:	179.64m (Highway 26)



Culvert Calculator Report WC 7 Georgian Trail Culvert

Solve For: Discharge

Culvert Summary			
Allowable HW Elevation	180.57 m	Headwater Depth/Height	1.25
Computed Headwater Elev.	180.57 m	Discharge	4.5422 m³/s
Inlet Control HW Elev.	180.44 m	Tailwater Elevation	179.64 m
Outlet Control HW Elev.	180.57 m	Control Type	Entrance Control
Grades			
Upstream Invert	179.04 m	Downstream Invert	178.50 m
Length	10.50 m	Constructed Slope	0.051429 m/m
Hydraulic Profile			
Profile	CompositeS1S2	Depth, Downstream	1.14 m
Slope Type	Steep	Normal Depth	0.58 m
Flow Regime	N/A	Critical Depth	0.83 m
Velocity Downstream	2.00 m/s	Critical Slope	0.016487 m/m
Section			
Section Shape	Circular	Mannings Coefficient	0.024
Section Material	CMP	Span	1.22 m
Section Size	1200 mm	Rise	1.22 m
Number Sections	2		
Outlet Control Properties			
Outlet Control HW Elev.	180.57 m	Upstream Velocity Head	0.37 m
Ke	0.90	Entrance Loss	0.33 m
Inlet Control Properties			
Inlet Control HW Elev.	180.44 m	Flow Control	Unsubmerged
Inlet Type	Projecting	Area Full	2.3 m²
K	0.03400	HDS 5 Chart	2
M	1.50000	HDS 5 Scale	3
C	0.05530	Equation Form	1
Y	0.54000		

Culvert Calculator Report WC 7 Highway 26 Culvert

Solve For: Discharge

Culvert Summary			
Allowable HW Elevation	179.64 m	Headwater Depth/Height	1.28
Computed Headwater Elev.	179.64 m	Discharge	2.3380 m³/s
Inlet Control HW Elev.	179.64 m	Tailwater Elevation	178.89 m
Outlet Control HW Elev.	179.62 m	Control Type	Inlet Control
Grades			
Upstream Invert	178.40 m	Downstream Invert	177.89 m
Length	22.00 m	Constructed Slope	0.023182 m/m
Hydraulic Profile			
Profile	CompositePressureProfileS1	Depth, Downstream	0.62 m
Slope Type	N/A	Normal Depth	0.62 m
Flow Regime	Subcritical	Critical Depth	0.68 m
Velocity Downstream	2.93 m/s	Critical Slope	0.019032 m/m
Section			
Section Shape	Arch	Mannings Coefficient	0.025
Section Material	Steel and Aluminum Var CR	Span	1.45 m
Section Size	1390 x 970 mm	Rise	0.97 m
Number Sections	1		
Outlet Control Properties			
Outlet Control HW Elev.	179.62 m	Upstream Velocity Head	0.37 m
Ke	0.50	Entrance Loss	0.17 m
Inlet Control Properties			
Inlet Control HW Elev.	179.64 m	Flow Control	Transition
Inlet Type	90° headwall	Area Full	1.1 m²
K	0.00830	HDS 5 Chart	34
M	2.00000	HDS 5 Scale	1
C	0.03790	Equation Form	1
Y	0.69000		

Culvert Calculator Report WC 7 Lakeshore Culvert

Solve For: Discharge

Culvert Summary			
Allowable HW Elevation	182.74 m	Headwater Depth/Height	1.35
Computed Headwater Elev.	182.74 m	Discharge	3.7804 m³/s
Inlet Control HW Elev.	182.74 m	Tailwater Elevation	0.00 m
Outlet Control HW Elev.	182.69 m	Control Type	Inlet Control
Grades			
Upstream Invert	181.51 m	Downstream Invert	181.28 m
Length	9.00 m	Constructed Slope	0.025556 m/m
Hydraulic Profile			
Profile	S2	Depth, Downstream	0.52 m
Slope Type	Steep	Normal Depth	0.40 m
Flow Regime	Supercritical	Critical Depth	0.76 m
Velocity Downstream	3.98 m/s	Critical Slope	0.004066 m/m
Section			
Section Shape	Box	Mannings Coefficient	0.013
Section Material	Concrete	Span	1.83 m
Section Size	1830 x 910 mm	Rise	0.91 m
Number Sections	1		
Outlet Control Properties			
Outlet Control HW Elev.	182.69 m	Upstream Velocity Head	0.37 m
Ke	0.20	Entrance Loss	0.07 m
Inlet Control Properties			
Inlet Control HW Elev.	182.74 m	Flow Control	N/A
Inlet Type	90° headwall w 45° bevels	Area Full	1.7 m²
K	0.49500	HDS 5 Chart	10
M	0.66700	HDS 5 Scale	2
C	0.03140	Equation Form	2
Y	0.82000		

Culvert Calculator Report

Lateral Concrete Pipe

Solve For: Discharge

Culvert Summary			
Allowable HW Elevation	179.64 m	Headwater Depth/Height	1.35
Computed Headwater Elev.	179.64 m	Discharge	1.4745 m ³ /s
Inlet Control HW Elev.	179.31 m	Tailwater Elevation	179.31 m
Outlet Control HW Elev.	179.64 m	Control Type	Outlet Control
Grades			
Upstream Invert	178.41 m	Downstream Invert	177.70 m
Length	115.00 m	Constructed Slope	0.006174 m/m
Hydraulic Profile			
Profile	PressureProfile	Depth, Downstream	1.61 m
Slope Type	N/A	Normal Depth	0.44 m
Flow Regime	N/A	Critical Depth	0.51 m
Velocity Downstream	1.39 m/s	Critical Slope	0.004035 m/m
Section			
Section Shape	Arch	Mannings Coefficient	0.013
Section Material	Concrete	Span	1.49 m
Section Size	1490 x 910 mm	Rise	0.91 m
Number Sections	1		
Outlet Control Properties			
Outlet Control HW Elev.	179.64 m	Upstream Velocity Head	0.10 m
Ke	0.20	Entrance Loss	0.02 m
Inlet Control Properties			
Inlet Control HW Elev.	179.31 m	Flow Control	N/A
Inlet Type	Groove end projecting (arch)	Area Full	1.1 m ²
K	0.00450	HDS 5 Chart	0
M	2.00000	HDS 5 Scale	0
C	0.03170	Equation Form	1
Y	0.69000		

WATERCOURSE 7 – CHANNEL SECTIONS

DOWNSTREAM LAKESHORE ROAD

Description:	Trapezoidal section
Bottom Width:	2.3m
Top Width:	3.8m
Depth:	1.15m
Average Slope:	3.8%



DOWNSTREAM HIGHWAY 26 (OUTLET)

Description:	Rectangular section
Bottom Width:	0.61m
Top Width:	0.91m
Depth:	0.97m
Average Slope:	1.8%



HIGHWAY 26 DITCH (WC 7 to WC8)

Description:	Triangular section
Bottom Width:	-
Top Width:	3.5m
Depth:	0.78m
Average Slope:	1.86%

WC7 Downstream Lakeshore - Existing

Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Channel Slope	0.03768	m/m
Normal Depth	1.18	m
Section Definitions		

Station (m)	Elevation (m)
0+00.00	182.43
0+00.92	180.59
0+03.22	180.62
0+03.80	181.71

Roughness Segment Definitions

Start Station	Ending Station	Roughness Coefficient
(0+00.00, 182.43)	(0+03.80, 181.77)	0.045

Options

Current Roughness vweighted Method	Pavlovskii's Method
Open Channel Weighting Method	Pavlovskii's Method
Closed Channel Weighting Method	Pavlovskii's Method

Results

Discharge	11.27	m³/s
Elevation Range	180.59 to 182.43 m	
Flow Area	3.36	m²
Wetted Perimeter	4.91	m
Hydraulic Radius	0.68	m
Top Width	3.47	m
Normal Depth	1.18	m
Critical Depth	1.24	m
Critical Slope	0.03203	m/m

WC7 Downstream Lakeshore - Existing

Results

Velocity	3.35	m/s
Velocity Head	0.57	m
Specific Energy	1.75	m
Froude Number	1.09	
Flow Type	Supercritical	

GVF Input Data

Downstream Depth	0.00	m
Length	0.00	m
Number Of Steps	0	

GVF Output Data

Upstream Depth	0.00	m
Profile Description		
Profile Headloss	0.00	m
Downstream Velocity	Infinity	m/s
Upstream Velocity	Infinity	m/s
Normal Depth	1.18	m
Critical Depth	1.24	m
Channel Slope	0.03768	m/m
Critical Slope	0.03203	m/m

WC7 Downstream Lakeshore - Existing


Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Channel Slope	0.03768	m/m
Normal Depth	1.18	m
Discharge	11.27	m³/s

Cross Section Image

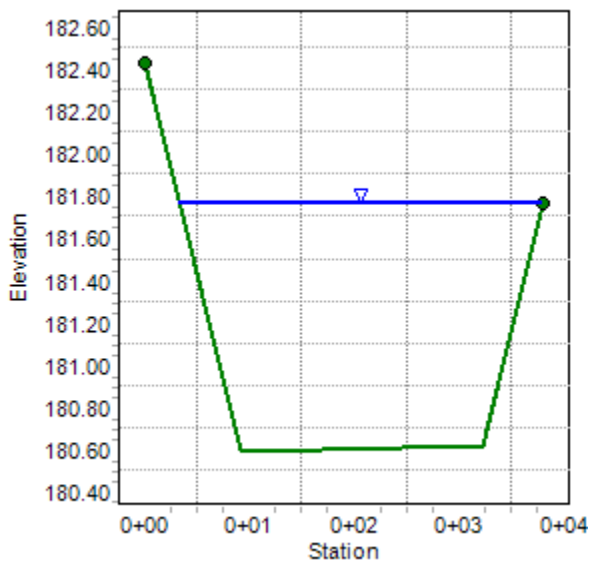

Highway 26 Ditch - Existing

Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Channel Slope	0.00500	m/m
Normal Depth	0.78	m
Section Definitions		

Station (m)	Elevation (m)
0+00.00	179.31
0+02.50	179.19
0+04.00	179.09
0+06.00	178.59
0+09.00	179.30
0+10.50	179.62
0+14.00	180.14

Roughness Segment Definitions

Start Station	Ending Station	Roughness Coefficient
(0+00.00, 179.37)	(0+14.00, 180.14)	0.050

Options

Current Roughness vweighted Method	Pavlovskii's Method
Open Channel Weighting Method	Pavlovskii's Method
Closed Channel Weighting Method	Pavlovskii's Method

Results

Discharge	1.86	m³/s
Elevation Range	178.59 to 180.14 m	
Flow Area	2.86	m²
Wetted Perimeter	9.13	m
Hydraulic Radius	0.31	m
Top Width	8.96	m

Highway 26 Ditch - Existing

Results

Normal Depth	0.78	m
Critical Depth	0.54	m
Critical Slope	0.04050	m/m
Velocity	0.65	m/s
Velocity Head	0.02	m
Specific Energy	0.80	m
Froude Number	0.37	
Flow Type	Subcritical	

GVF Input Data

Downstream Depth	0.00	m
Length	0.00	m
Number Of Steps	0	

GVF Output Data

Upstream Depth	0.00	m
Profile Description		
Profile Headloss	0.00	m
Downstream Velocity	Infinity	m/s
Upstream Velocity	Infinity	m/s
Normal Depth	0.78	m
Critical Depth	0.54	m
Channel Slope	0.00500	m/m
Critical Slope	0.04050	m/m

Highway 26 Ditch - Existing


Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Channel Slope	0.00500	m/m
Normal Depth	0.78	m
Discharge	1.86	m³/s

Cross Section Image

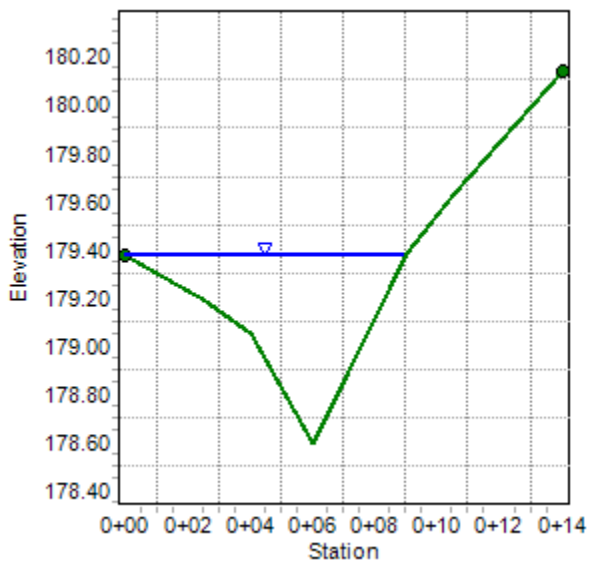

WC7 Outlet - Existing

Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Channel Slope	0.01818	m/m
Normal Depth	0.97	m
Section Definitions		

Station (m)	Elevation (m)
0+00.00	179.20
0+00.00	177.67
0+00.61	177.67
0+00.91	178.64

Roughness Segment Definitions

Start Station	Ending Station	Roughness Coefficient
(0+00.00, 179.20)	(0+00.91, 178.64)	0.035

Options

Current Roughness vweighted Method	Pavlovskii's Method
Open Channel Weighting Method	Pavlovskii's Method
Closed Channel Weighting Method	Pavlovskii's Method

Results

Discharge	1.23	m³/s
Elevation Range	177.67 to 179.20 m	
Flow Area	0.74	m²
Wetted Perimeter	2.60	m
Hydraulic Radius	0.28	m
Top Width	0.91	m
Normal Depth	0.97	m
Critical Depth	0.70	m
Critical Slope	0.04737	m/m

WC7 Outlet - Existing

Results

Velocity	1.66	m/s
Velocity Head	0.14	m
Specific Energy	1.11	m
Froude Number	0.59	
Flow Type	Subcritical	

GVF Input Data

Downstream Depth	0.00	m
Length	0.00	m
Number Of Steps	0	

GVF Output Data

Upstream Depth	0.00	m
Profile Description		
Profile Headloss	0.00	m
Downstream Velocity	Infinity	m/s
Upstream Velocity	Infinity	m/s
Normal Depth	0.97	m
Critical Depth	0.70	m
Channel Slope	0.01818	m/m
Critical Slope	0.04737	m/m

WC7 Outlet - Existing


Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Channel Slope	0.01818	m/m
Normal Depth	0.97	m
Discharge	1.23	m³/s

Cross Section Image

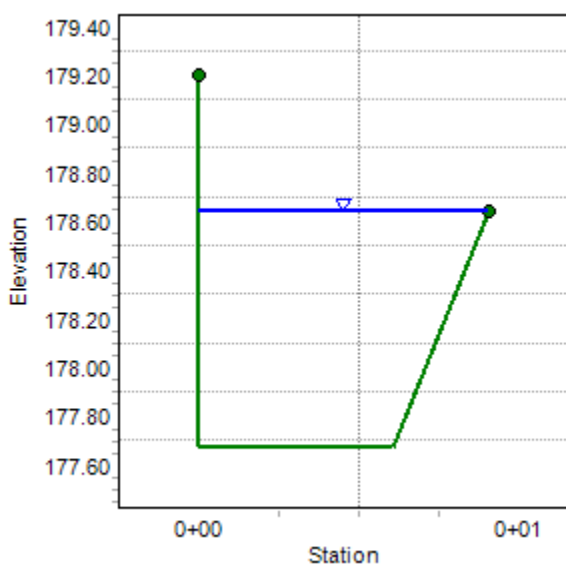

WATERCOURSE 8 – CULVERTS

LAKESHORE ROAD

Description:	CSP Culvert
Size:	Circular 350mm dia.
Upstream invert:	180.09m
Downstream invert:	179.71m
Length:	9.5m
Slope:	4%
Road Deck Elevation:	181.01m



GEORGIAN TRAIL

Description:	Twin CSP Culvert
Size:	Circular 750mm dia.
Upstream invert:	178.44m
Downstream invert:	177.76m
Length:	10m
Slope:	6.8%
Road Deck Elevation:	180.43m



HIGHWAY 26 CULVERT

Description:	CSP Arch
Size:	1.0m rise x 1.6m span
Upstream invert:	177.83
Downstream invert:	177.63m
Length:	25m
Slope:	0.8%
Road Deck Elevation:	179.31m



Culvert Calculator Report

WC 8 Lakeshore Culvert

Solve For: Discharge

Culvert Summary			
Allowable HW Elevation	181.01 m	Headwater Depth/Height	3.02
Computed Headwater Elev.	181.01 m	Discharge	0.1077 m ³ /s
Inlet Control HW Elev.	180.64 m	Tailwater Elevation	180.43 m
Outlet Control HW Elev.	181.01 m	Control Type	Outlet Control
Grades			
Upstream Invert	180.09 m	Downstream Invert	179.71 m
Length	9.50 m	Constructed Slope	0.040000 m/m
Hydraulic Profile			
Profile	PressureProfile	Depth, Downstream	0.72 m
Slope Type	N/A	Normal Depth	0.25 m
Flow Regime	N/A	Critical Depth	0.25 m
Velocity Downstream	1.48 m/s	Critical Slope	0.038022 m/m
Section			
Section Shape	Circular	Mannings Coefficient	0.024
Section Material	CMP	Span	0.30 m
Section Size	300 mm	Rise	0.30 m
Number Sections	1		
Outlet Control Properties			
Outlet Control HW Elev.	181.01 m	Upstream Velocity Head	0.11 m
Ke	0.90	Entrance Loss	0.10 m
Inlet Control Properties			
Inlet Control HW Elev.	180.64 m	Flow Control	Submerged
Inlet Type	Projecting	Area Full	0.1 m ²
K	0.03400	HDS 5 Chart	2
M	1.50000	HDS 5 Scale	3
C	0.05530	Equation Form	1
Y	0.54000		

Culvert Calculator Report WC 8 Georgian Trail Culvert

Solve For: Discharge

Culvert Summary			
Allowable HW Elevation	180.43 m	Headwater Depth/Height	2.61
Computed Headwater Elev.	180.43 m	Discharge	2.4971 m³/s
Inlet Control HW Elev.	180.19 m	Tailwater Elevation	179.31 m
Outlet Control HW Elev.	180.43 m	Control Type	Outlet Control
Grades			
Upstream Invert	178.44 m	Downstream Invert	177.76 m
Length	10.00 m	Constructed Slope	0.068000 m/m
Hydraulic Profile			
Profile	PressureProfile	Depth, Downstream	1.55 m
Slope Type	N/A	Normal Depth	0.50 m
Flow Regime	N/A	Critical Depth	0.67 m
Velocity Downstream	2.74 m/s	Critical Slope	0.035269 m/m
Section			
Section Shape	Circular	Mannings Coefficient	0.024
Section Material	CMP	Span	0.76 m
Section Size	750 mm	Rise	0.76 m
Number Sections	2		
Outlet Control Properties			
Outlet Control HW Elev.	180.43 m	Upstream Velocity Head	0.38 m
Ke	0.90	Entrance Loss	0.34 m
Inlet Control Properties			
Inlet Control HW Elev.	180.19 m	Flow Control	N/A
Inlet Type	Projecting	Area Full	0.9 m²
K	0.03400	HDS 5 Chart	2
M	1.50000	HDS 5 Scale	3
C	0.05530	Equation Form	1
Y	0.54000		

Culvert Calculator Report WC 8 Highway 26 Culvert

Solve For: Discharge

Culvert Summary			
Allowable HW Elevation	179.31 m	Headwater Depth/Height	1.36
Computed Headwater Elev.	179.31 m	Discharge	3.0145 m³/s
Inlet Control HW Elev.	179.26 m	Tailwater Elevation	178.63 m
Outlet Control HW Elev.	179.31 m	Control Type	Outlet Control
Grades			
Upstream Invert	177.83 m	Downstream Invert	177.63 m
Length	25.00 m	Constructed Slope	0.008000 m/m
Hydraulic Profile			
Profile	CompositeM2PressureProfile	Depth, Downstream	0.74 m
Slope Type	Mild	Normal Depth	N/A m
Flow Regime	Subcritical	Critical Depth	0.74 m
Velocity Downstream	2.80 m/s	Critical Slope	0.017599 m/m
Section			
Section Shape	Arch	Mannings Coefficient	0.025
Section Material	Steel and Aluminum Var CR	Span	1.63 m
Section Size	1630 x 1120 mm	Rise	1.09 m
Number Sections	1		
Outlet Control Properties			
Outlet Control HW Elev.	179.31 m	Upstream Velocity Head	0.25 m
Ke	0.90	Entrance Loss	0.23 m
Inlet Control Properties			
Inlet Control HW Elev.	179.26 m	Flow Control	N/A
Inlet Type	Thin wall projecting	Area Full	1.4 m²
K	0.03400	HDS 5 Chart	34
M	1.50000	HDS 5 Scale	3
C	0.04960	Equation Form	1
Y	0.57000		

WATERCOURSE 8 – CHANNEL SECTIONS

DOWNSTREAM LAKESHORE ROAD

Description:	Trapezoidal section
Bottom Width:	2.3m
Top Width:	3.8m
Depth:	1.15m
Average Slope:	3.8%



DOWNSTREAM HIGHWAY 26 (OUTLET)

Description:	Trapezoidal section
Bottom Width:	1.5m
Top Width:	2.3m
Depth:	0.42m
Average Slope:	1.0%



WC8 Downstream Lakeshore - Existing

Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Channel Slope	0.06400	m/m
Normal Depth	0.43	m
Section Definitions		

Station (m)	Elevation (m)
0+00.00	179.09
0+10.00	179.00
0+10.50	178.59
0+12.10	178.59
0+12.60	179.03
0+24.60	179.09

Roughness Segment Definitions

Start Station	Ending Station	Roughness Coefficient
(0+00.00, 179.09)	(0+10.00, 179.00)	0.050
(0+10.00, 179.00)	(0+12.60, 179.03)	0.035
(0+12.60, 179.03)	(0+24.60, 179.09)	0.050

Options

Current Roughness vweighted Method	Pavlovskii's Method
Open Channel Weighting Method	Pavlovskii's Method
Closed Channel Weighting Method	Pavlovskii's Method

Results

Discharge	2.86	m³/s
Elevation Range	178.57 to 179.09 m	
Flow Area	0.87	m²
Wetted Perimeter	2.88	m
Hydraulic Radius	0.30	m

WC8 Downstream Lakeshore - Existing

Results

Top Width	2.57	m
Normal Depth	0.43	m
Critical Depth	0.55	m
Critical Slope	0.02551	m/m
Velocity	3.27	m/s
Velocity Head	0.54	m
Specific Energy	0.97	m
Froude Number	1.79	
Flow Type	Supercritical	

GVF Input Data

Downstream Depth	0.00	m
Length	0.00	m
Number Of Steps	0	

GVF Output Data

Upstream Depth	0.00	m
Profile Description		
Profile Headloss	0.00	m
Downstream Velocity	Infinity	m/s
Upstream Velocity	Infinity	m/s
Normal Depth	0.43	m
Critical Depth	0.55	m
Channel Slope	0.06400	m/m
Critical Slope	0.02551	m/m

WC8 Downstream Lakeshore - Existing


Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Channel Slope	0.06400	m/m
Normal Depth	0.43	m
Discharge	2.86	m³/s

Cross Section Image

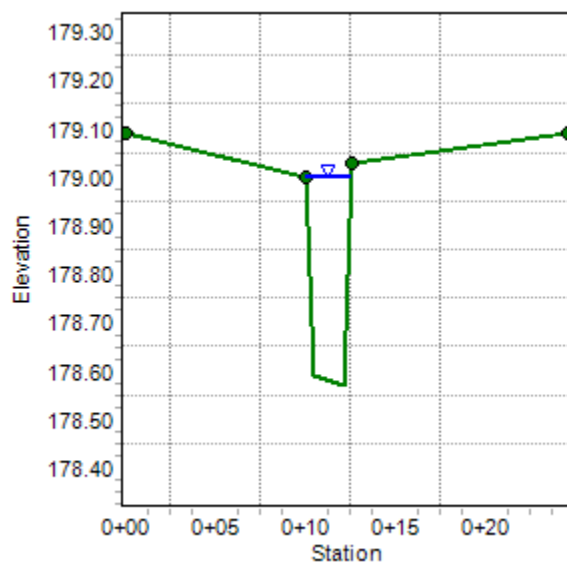

WC8 Outlet - Existing

Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Channel Slope	0.01000	m/m
Normal Depth	0.42	m
Section Definitions		

Station (m)	Elevation (m)
0+00.00	178.14
0+00.40	177.66
0+01.90	177.51
0+02.30	177.99

Roughness Segment Definitions

Start Station	Ending Station	Roughness Coefficient
(0+00.00, 178.14)	(0+00.40, 177.66)	0.090
(0+00.40, 177.66)	(0+01.90, 177.57)	0.035
(0+01.90, 177.57)	(0+02.30, 177.99)	0.090

Options

Current Roughness vweighted Method	Pavlovskii's Method
Open Channel Weighting Method	Pavlovskii's Method
Closed Channel Weighting Method	Pavlovskii's Method

Results

Discharge	0.46	m³/s
Elevation Range	177.57 to 178.14 m	
Flow Area	0.69	m²
Wetted Perimeter	2.51	m
Hydraulic Radius	0.28	m
Top Width	2.18	m
Normal Depth	0.42	m

WC8 Outlet - Existing

Results

Critical Depth	0.25	m
Critical Slope	0.07782	m/m
Velocity	0.67	m/s
Velocity Head	0.02	m
Specific Energy	0.44	m
Froude Number	0.38	
Flow Type	Subcritical	

GVF Input Data

Downstream Depth	0.00	m
Length	0.00	m
Number Of Steps	0	

GVF Output Data

Upstream Depth	0.00	m
Profile Description		
Profile Headloss	0.00	m
Downstream Velocity	Infinity	m/s
Upstream Velocity	Infinity	m/s
Normal Depth	0.42	m
Critical Depth	0.25	m
Channel Slope	0.01000	m/m
Critical Slope	0.07782	m/m

WC8 Outlet - Existing


Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Channel Slope	0.01000	m/m
Normal Depth	0.96	m
Discharge	2.51	m³/s

Cross Section Image

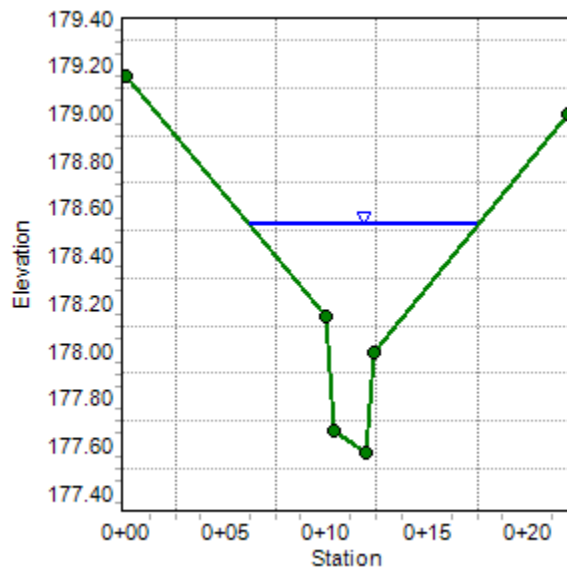

WATERCOURSE 9 – CULVERTS

LAKESHORE ROAD

Description:	Concrete box culvert
Size:	1.05m rise x 1.5m span
Upstream invert:	180.47m
Downstream invert:	180.33m
Length:	9.25m
Slope:	1.5%
Road Deck Elevation:	181.98m



GEORGIAN TRAIL

Description:	CSP Culvert
Size:	Circular 1500mm dia.
Upstream invert:	178.9m
Downstream invert:	178.1m
Length:	11m
Slope:	6.4%
Road Deck Elevation:	180.45m



HIGHWAY 26 CULVERT

Description:	Concrete box culvert
Size:	0.9m rise x 2.45m span
Upstream invert:	178.29m
Downstream invert:	178.08m
Length:	11.3m
Slope:	1.8%
Road Deck Elevation:	179.69m





WATERCOURSE 9 – CHANNEL SECTIONS


DOWNSTREAM HIGHWAY 26 (OUTLET)


Description:	Trapezoidal section
Bottom Width:	1.5m
Top Width:	2.0m
Depth:	1.0m
Average Slope:	1.3%




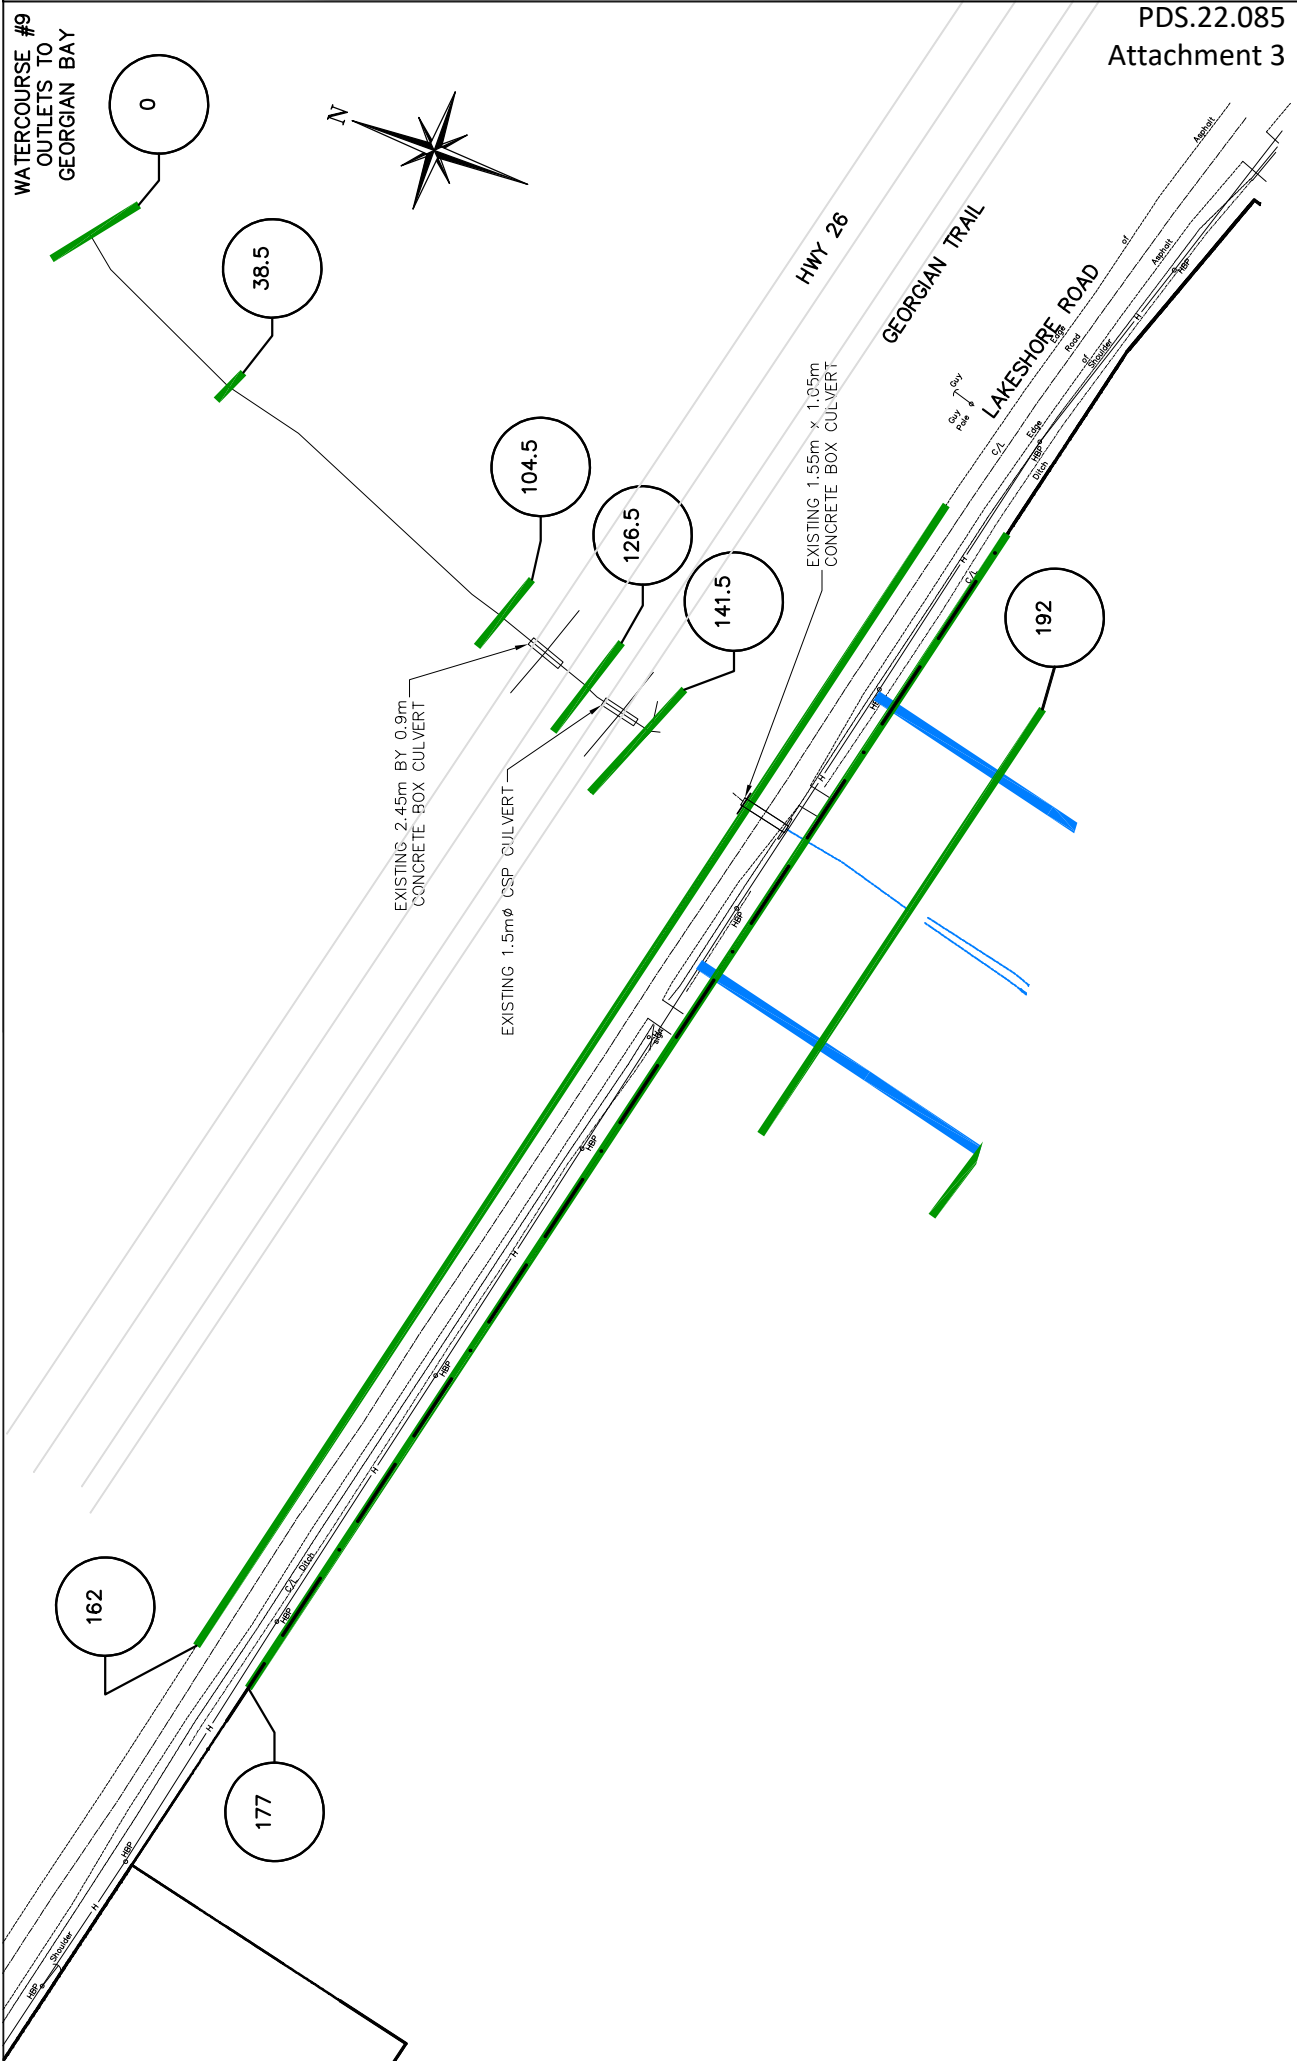


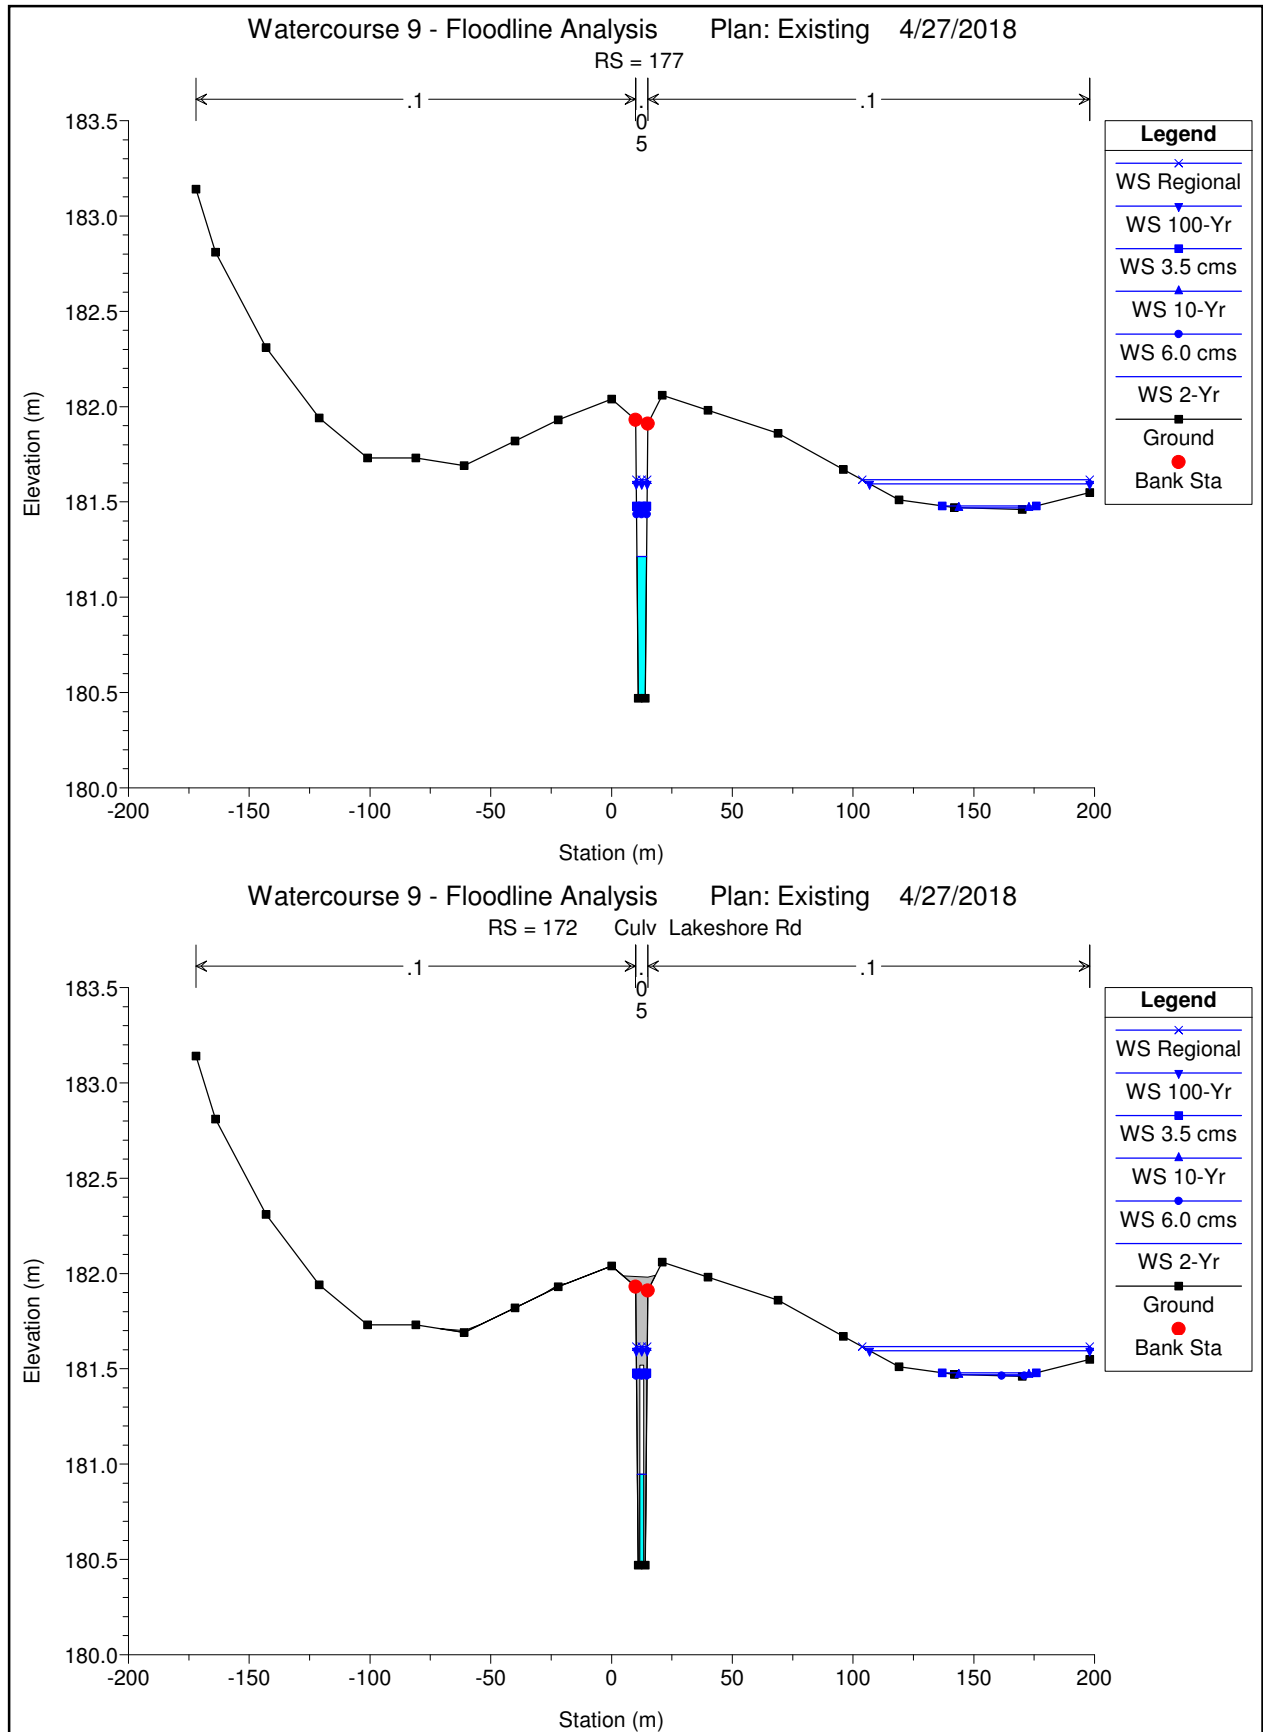


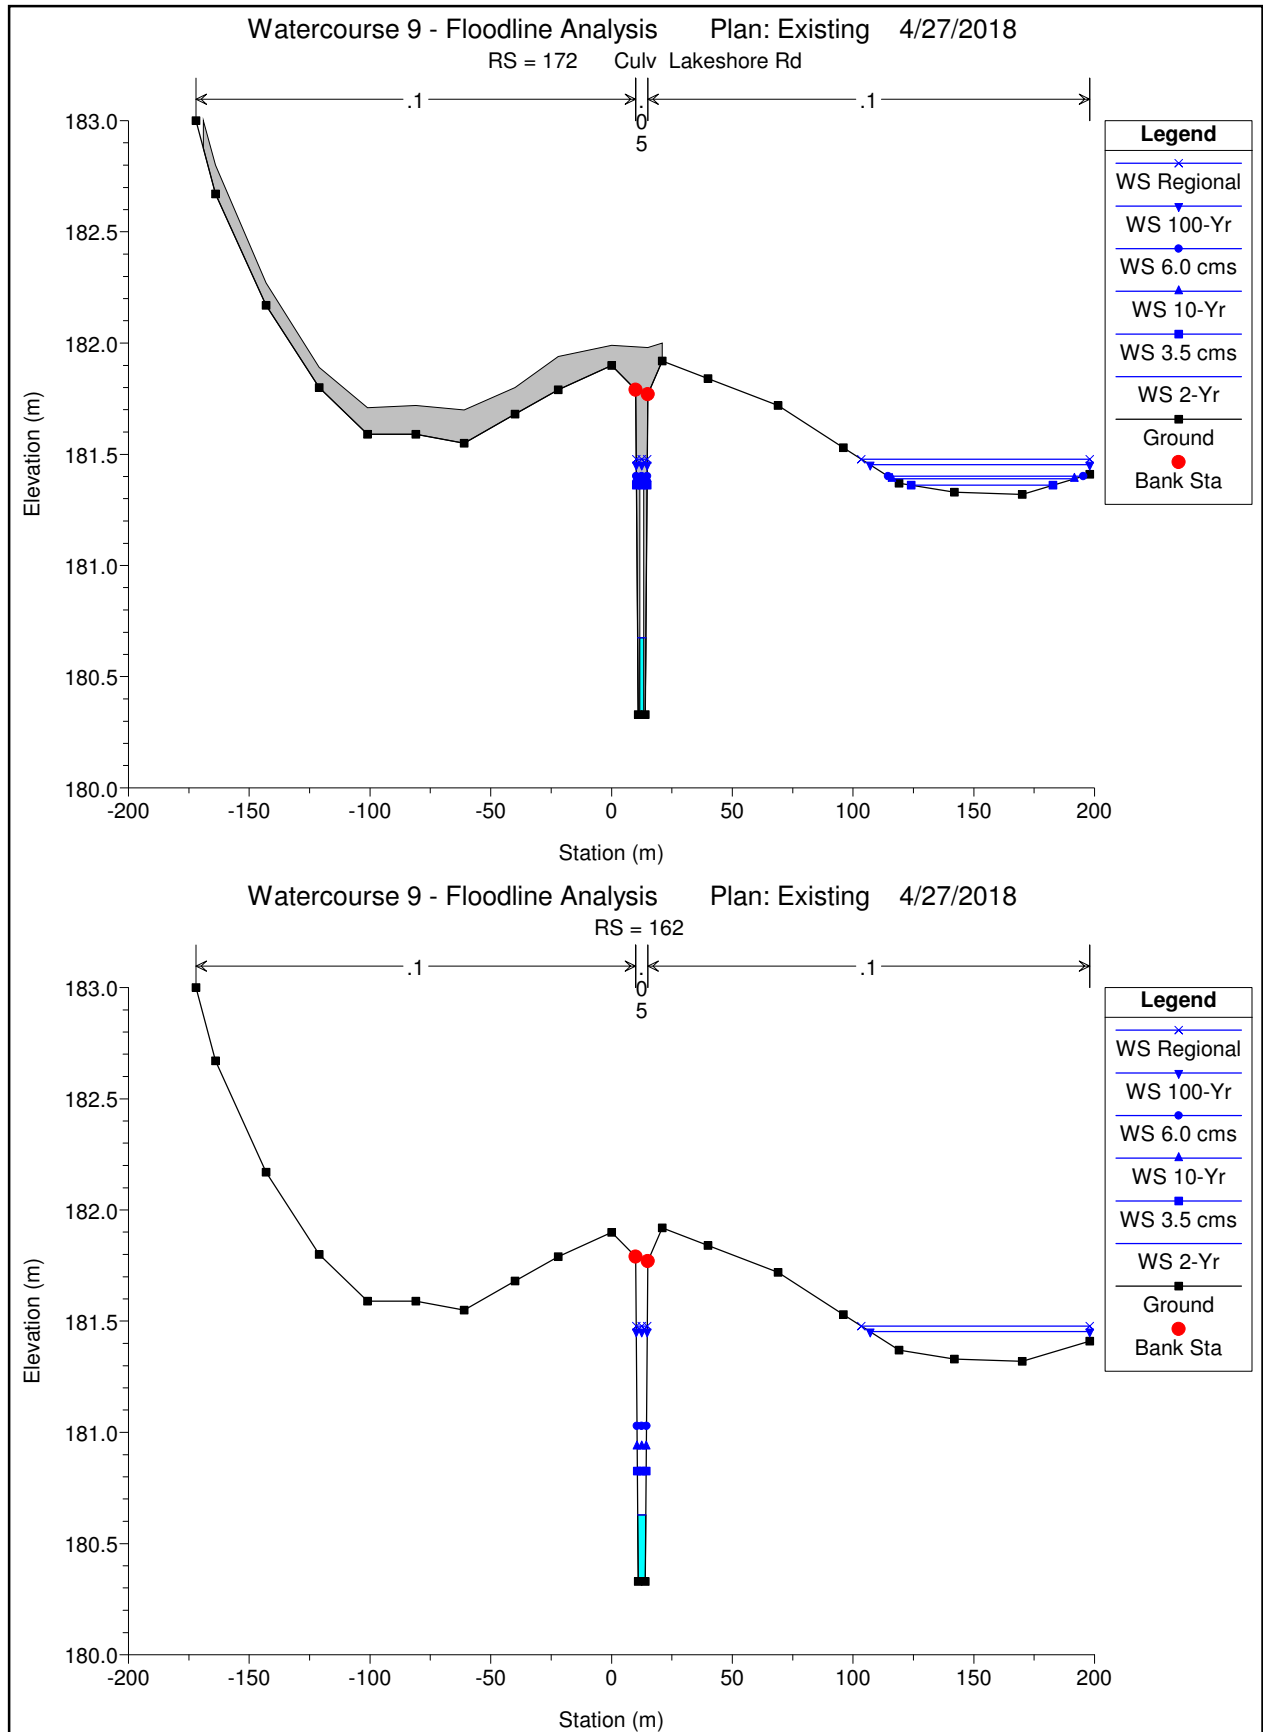


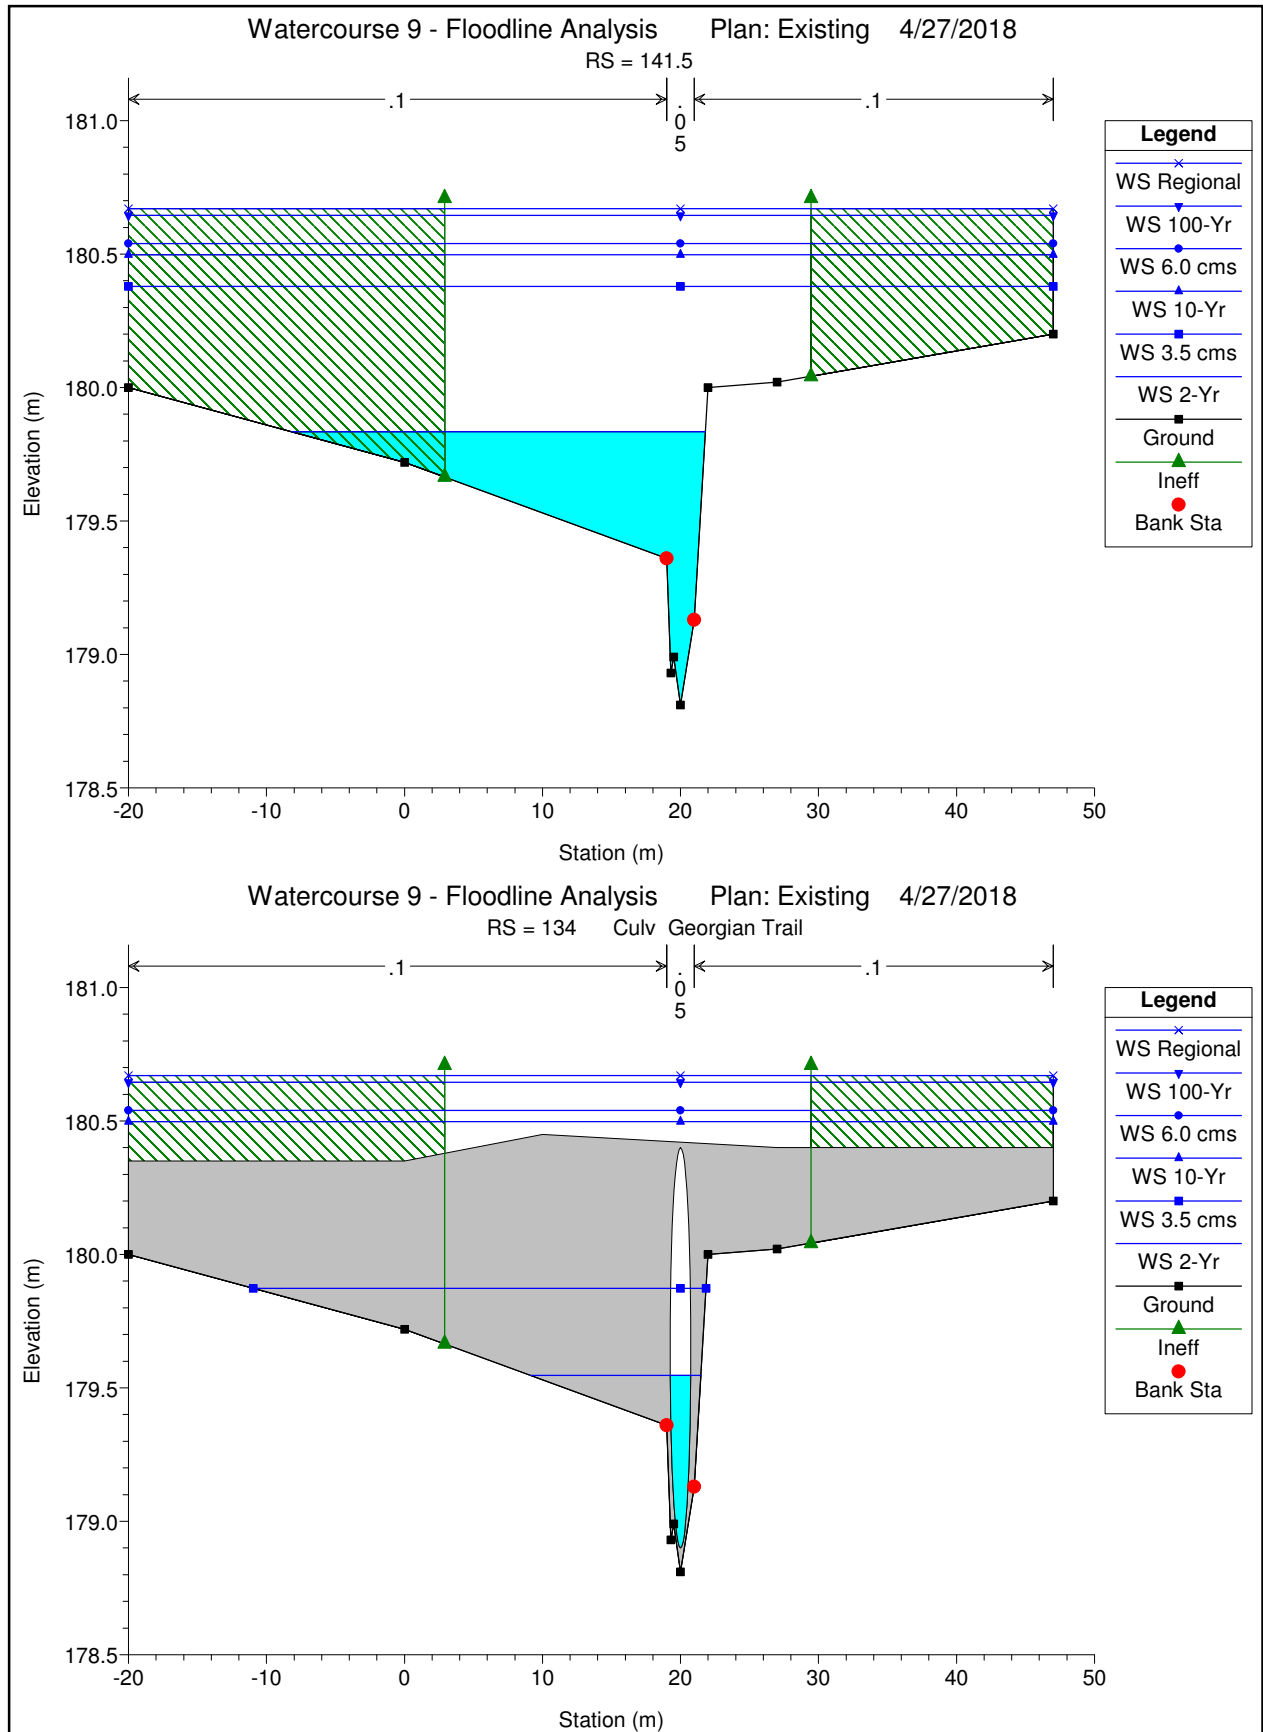


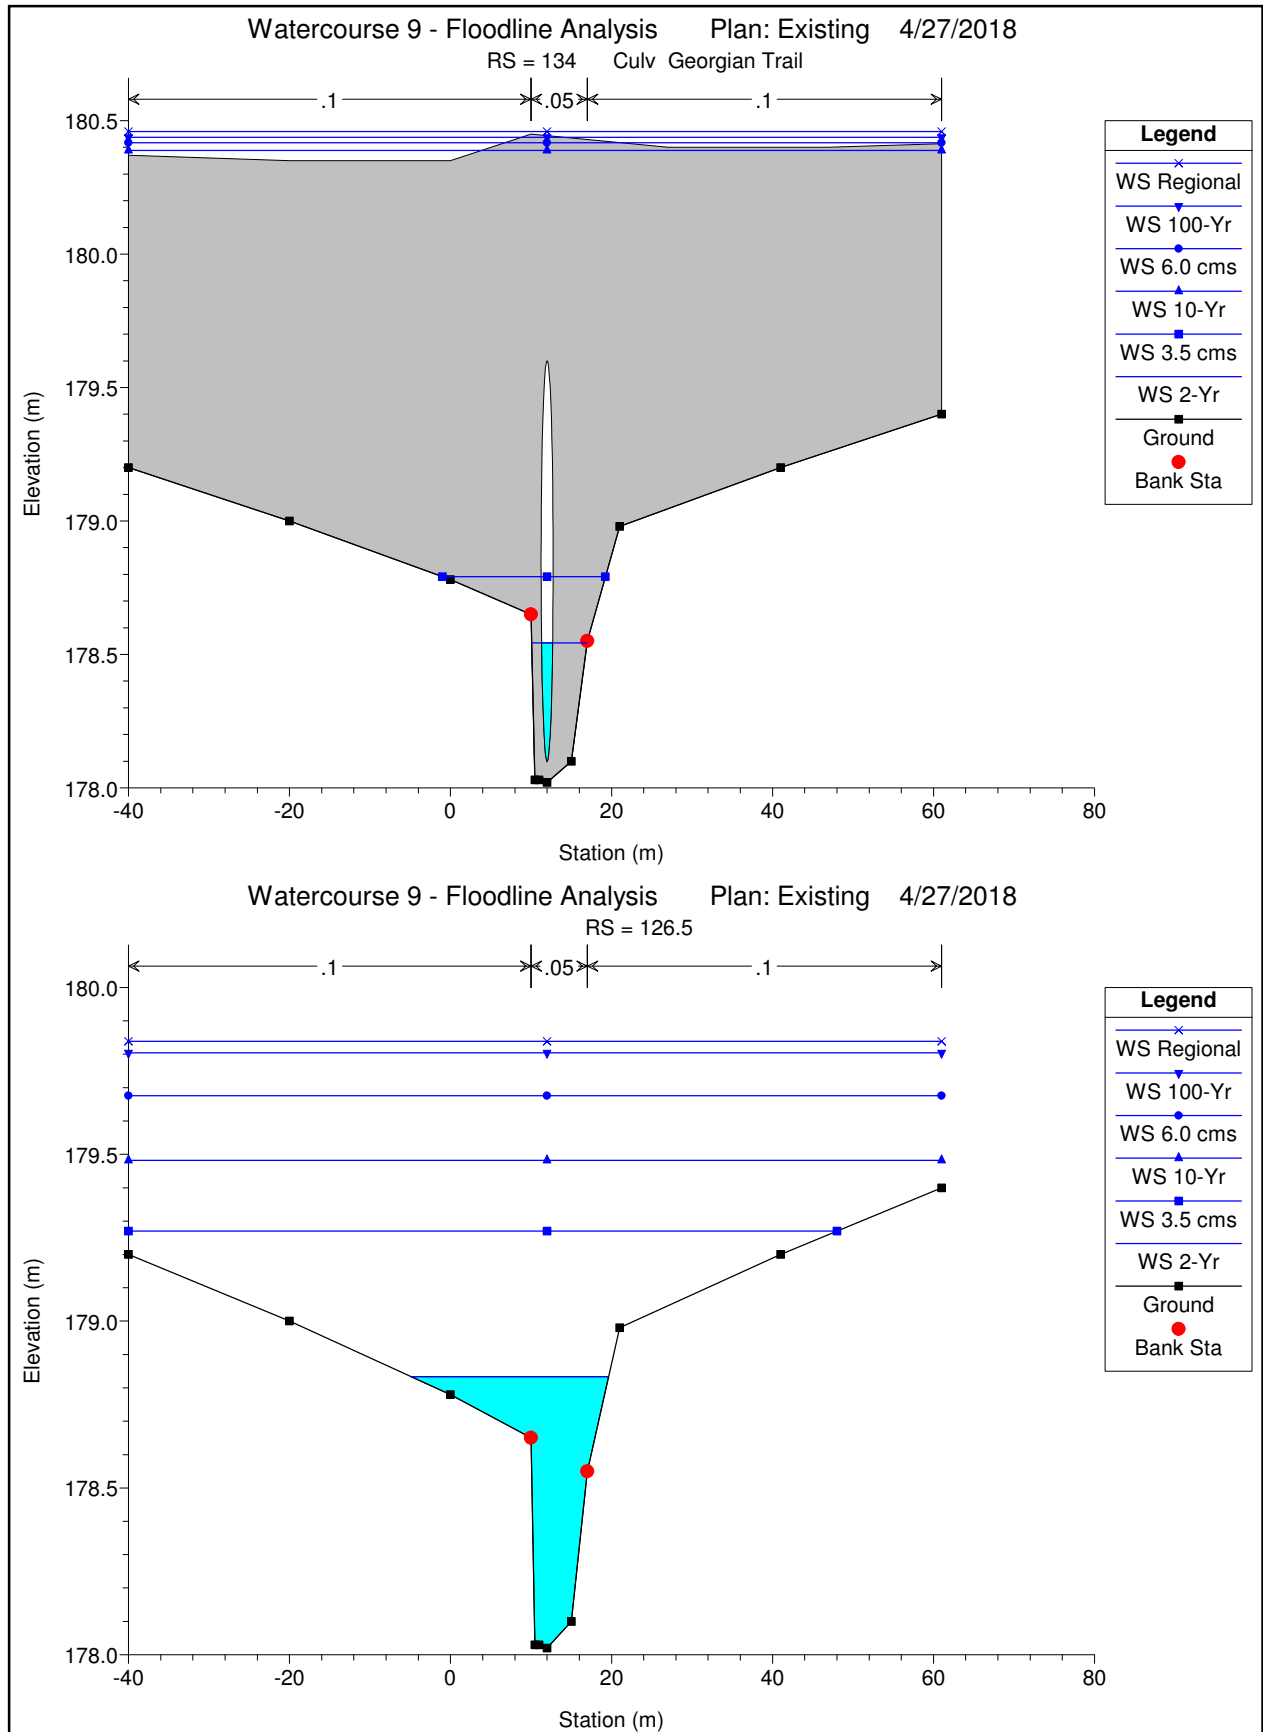

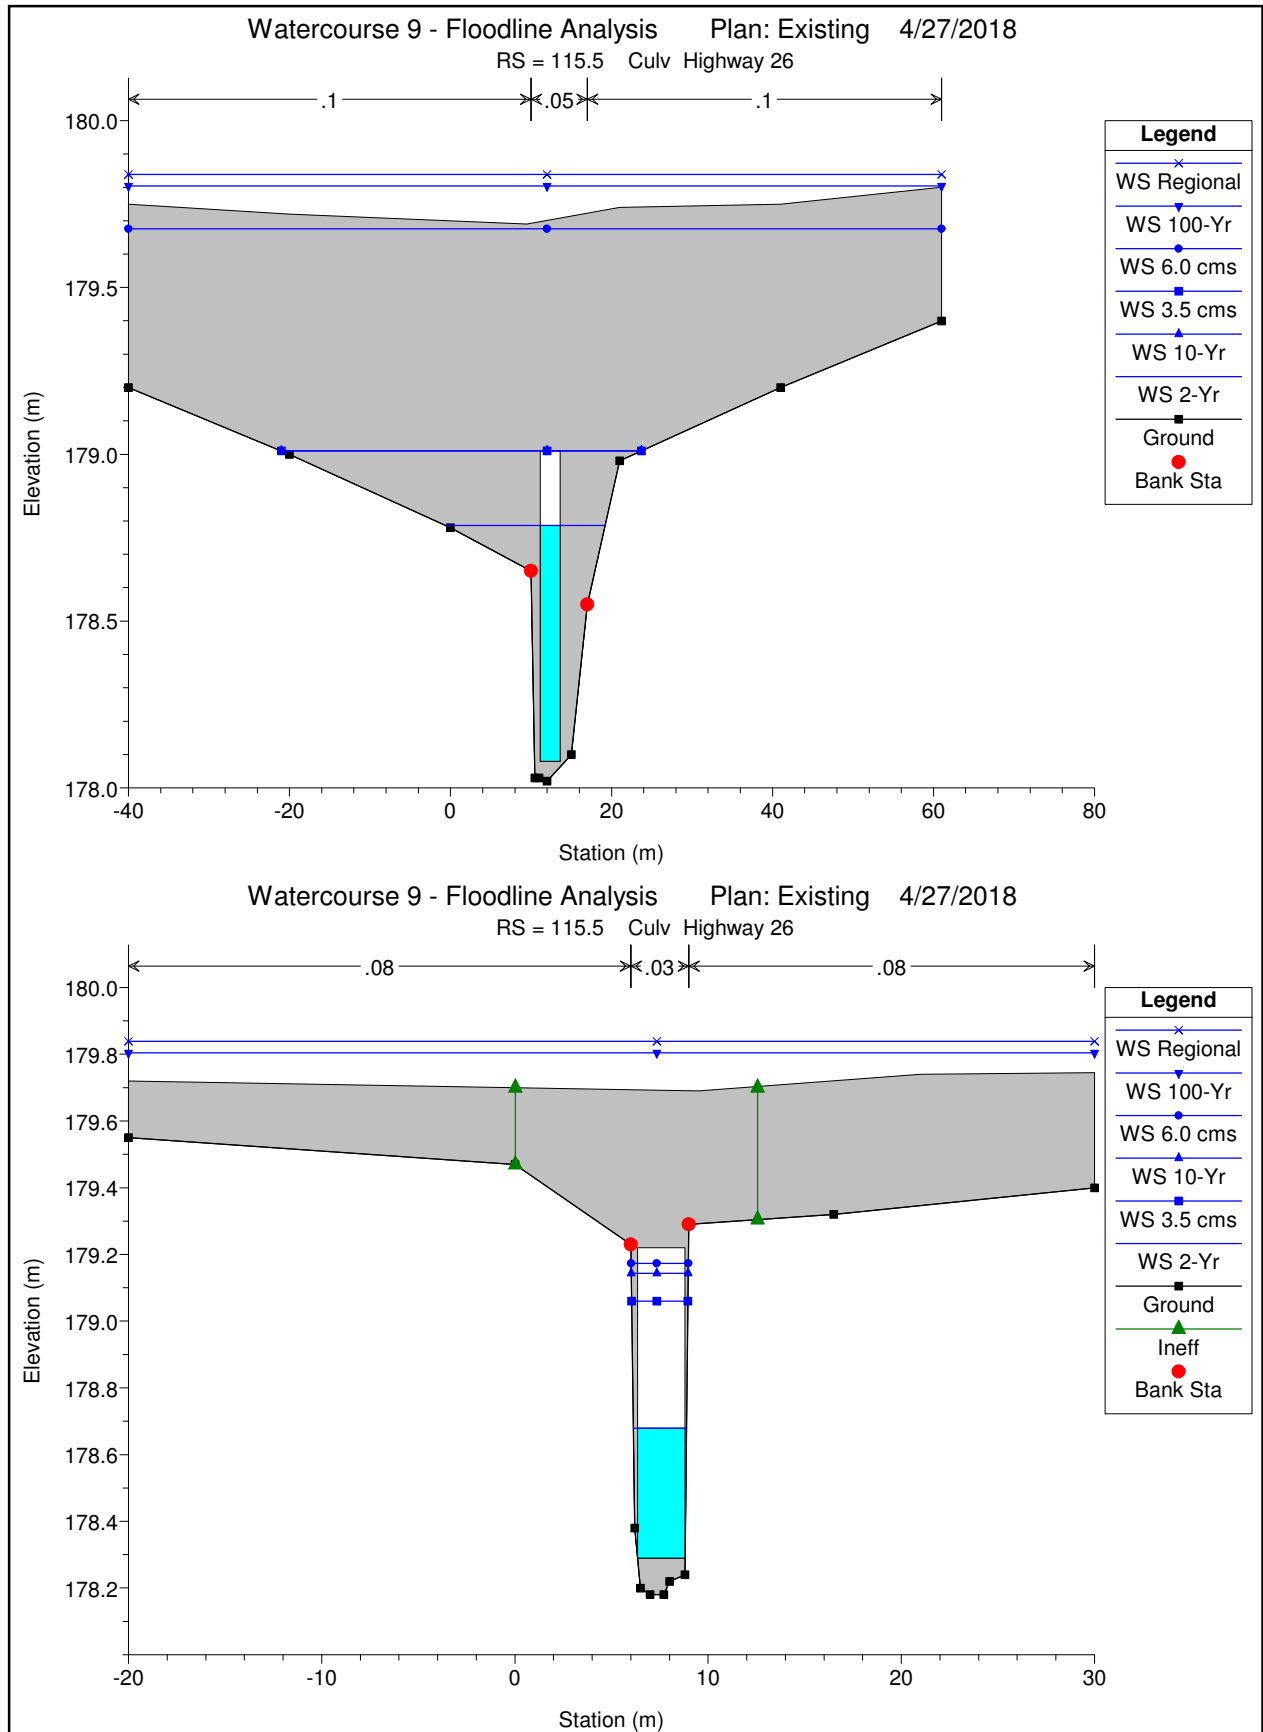

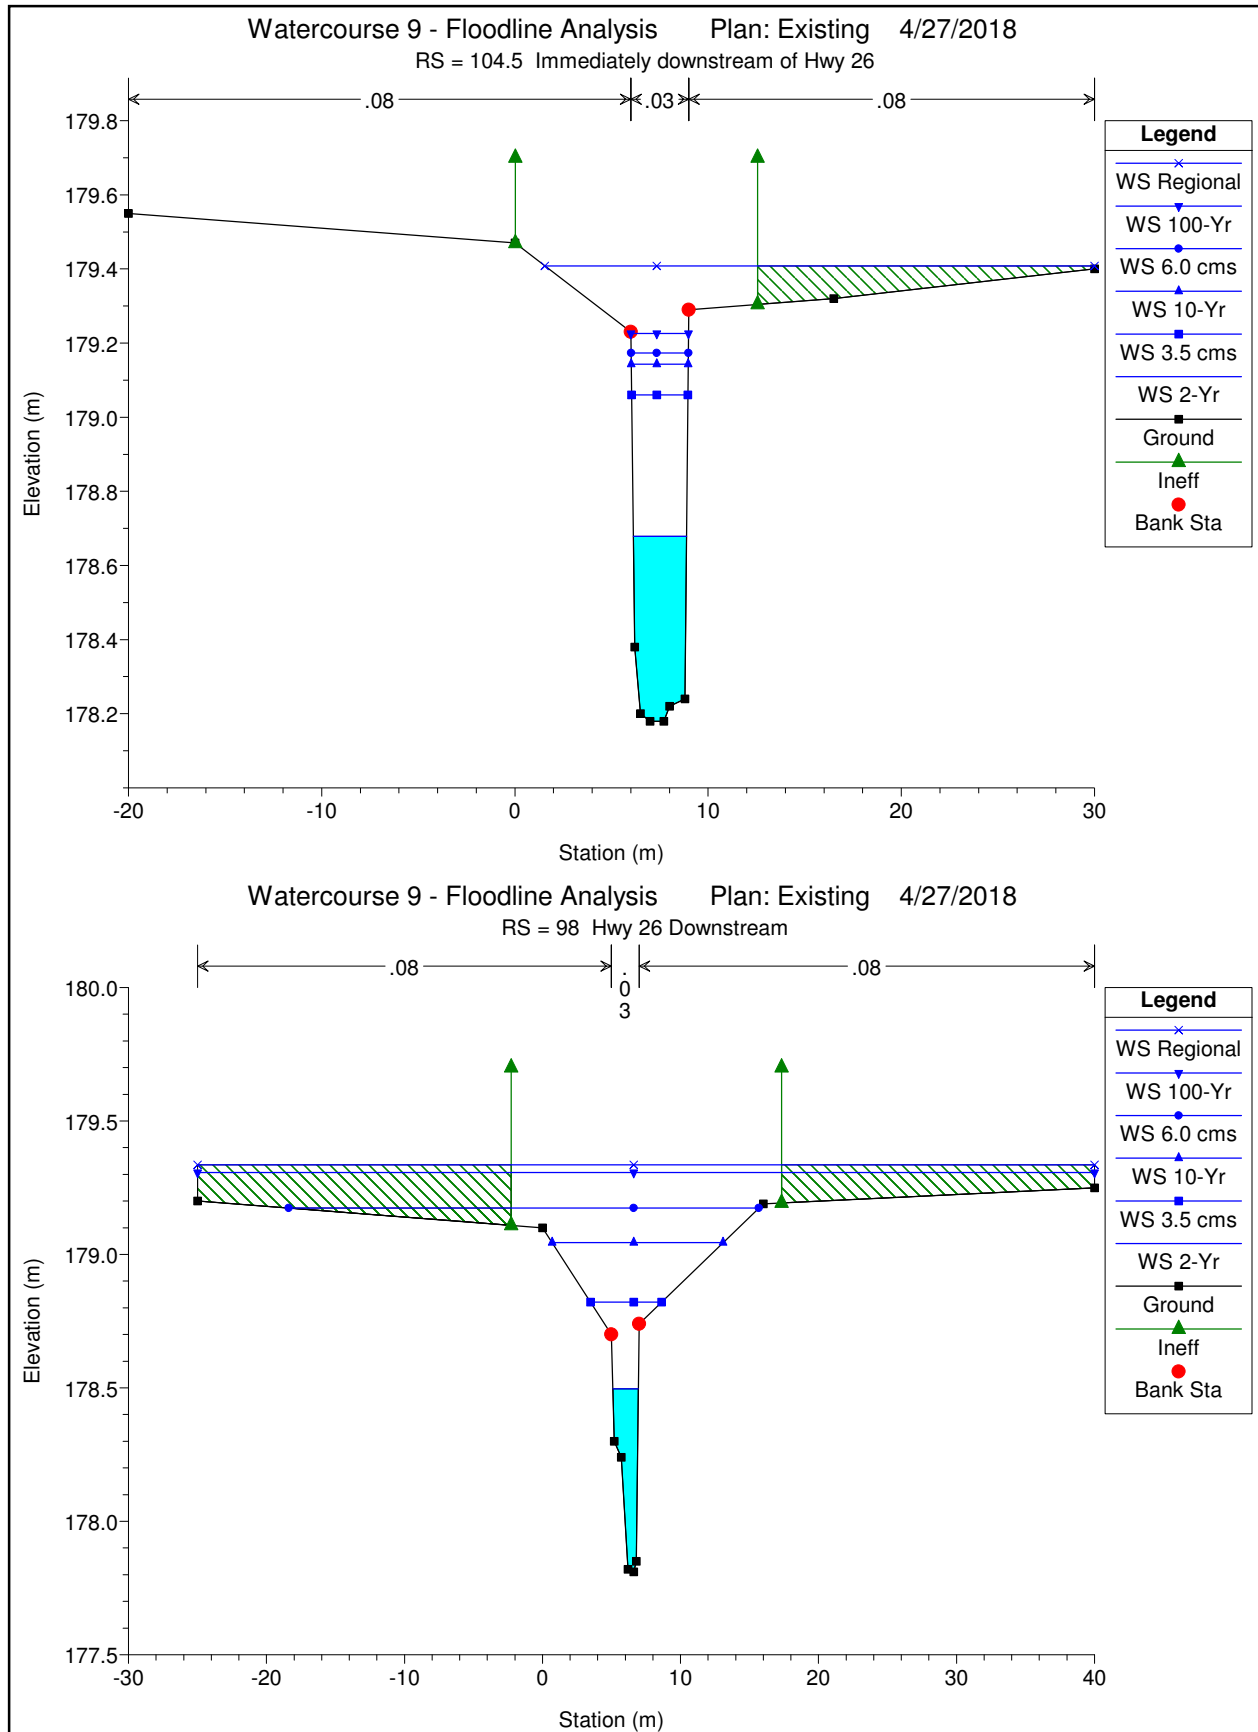


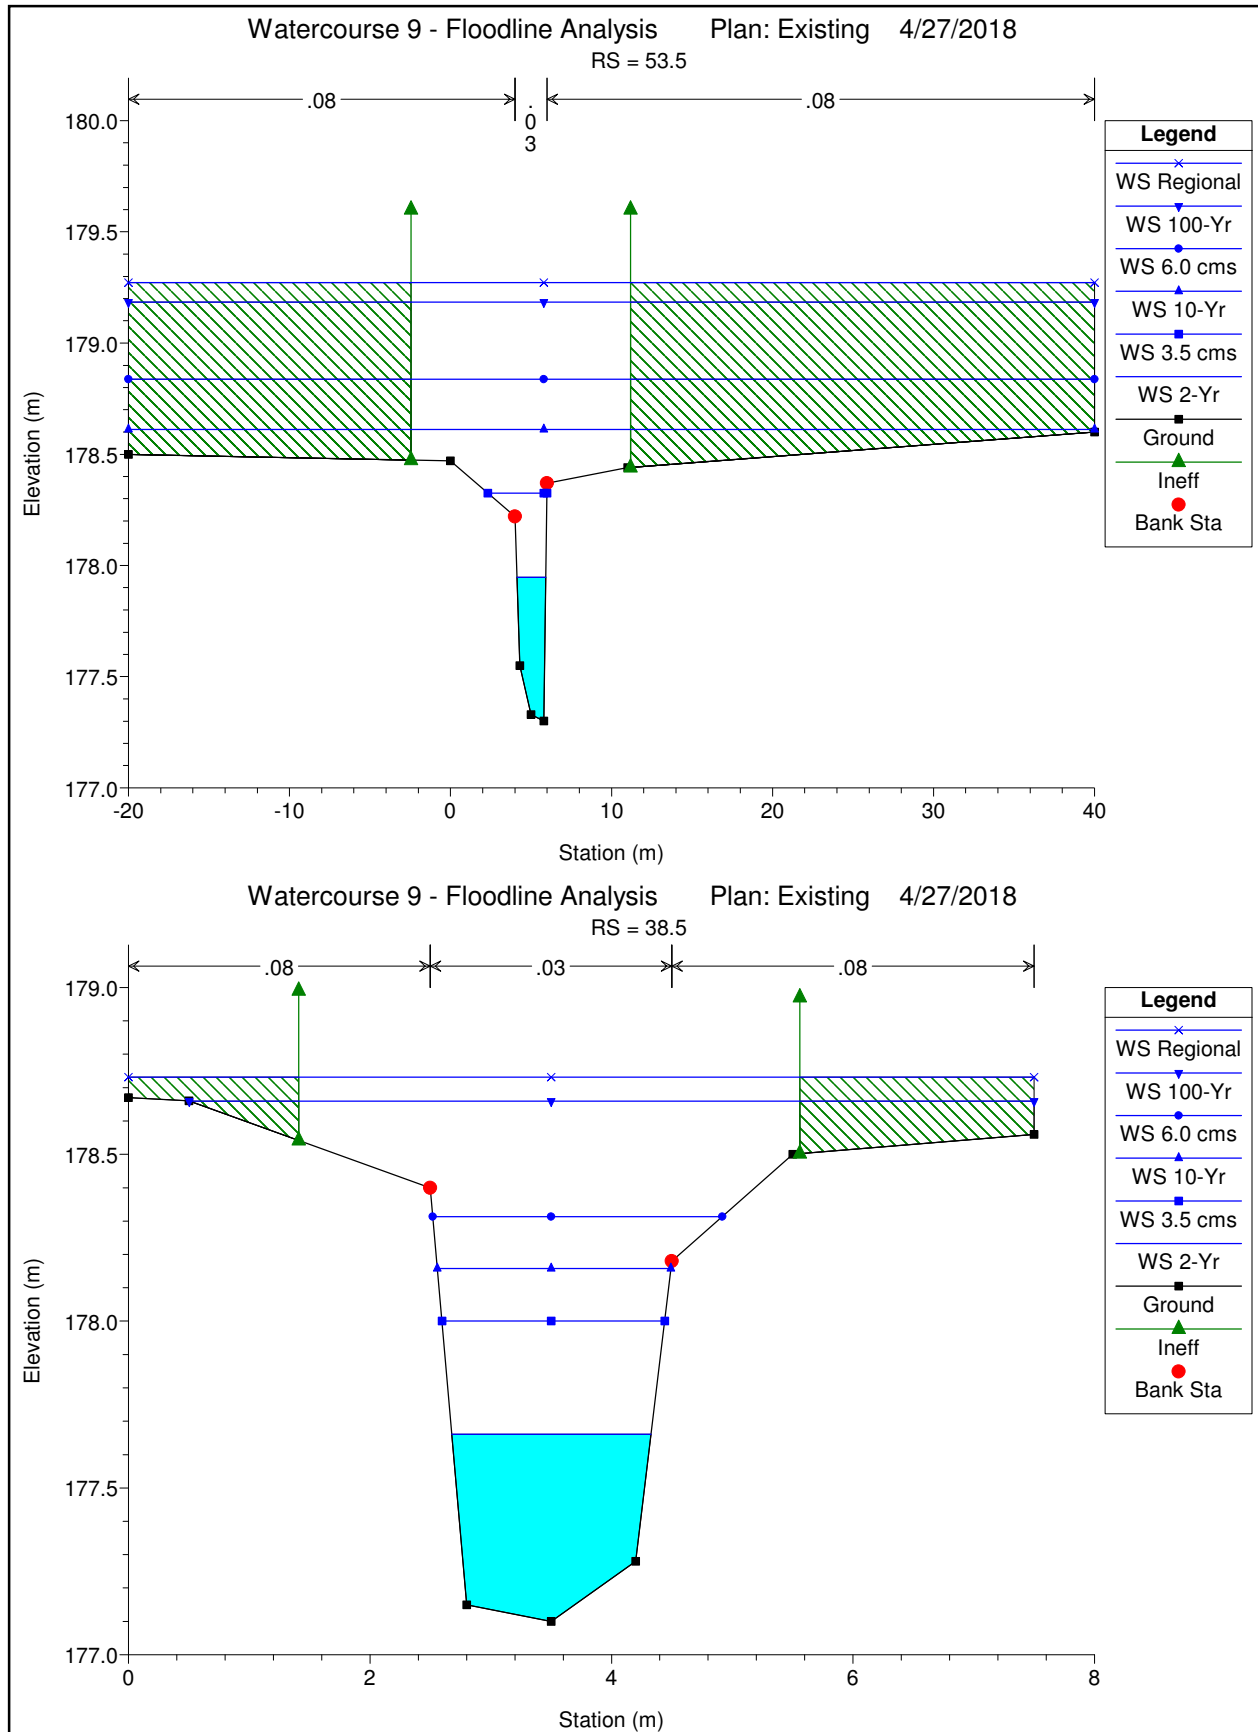

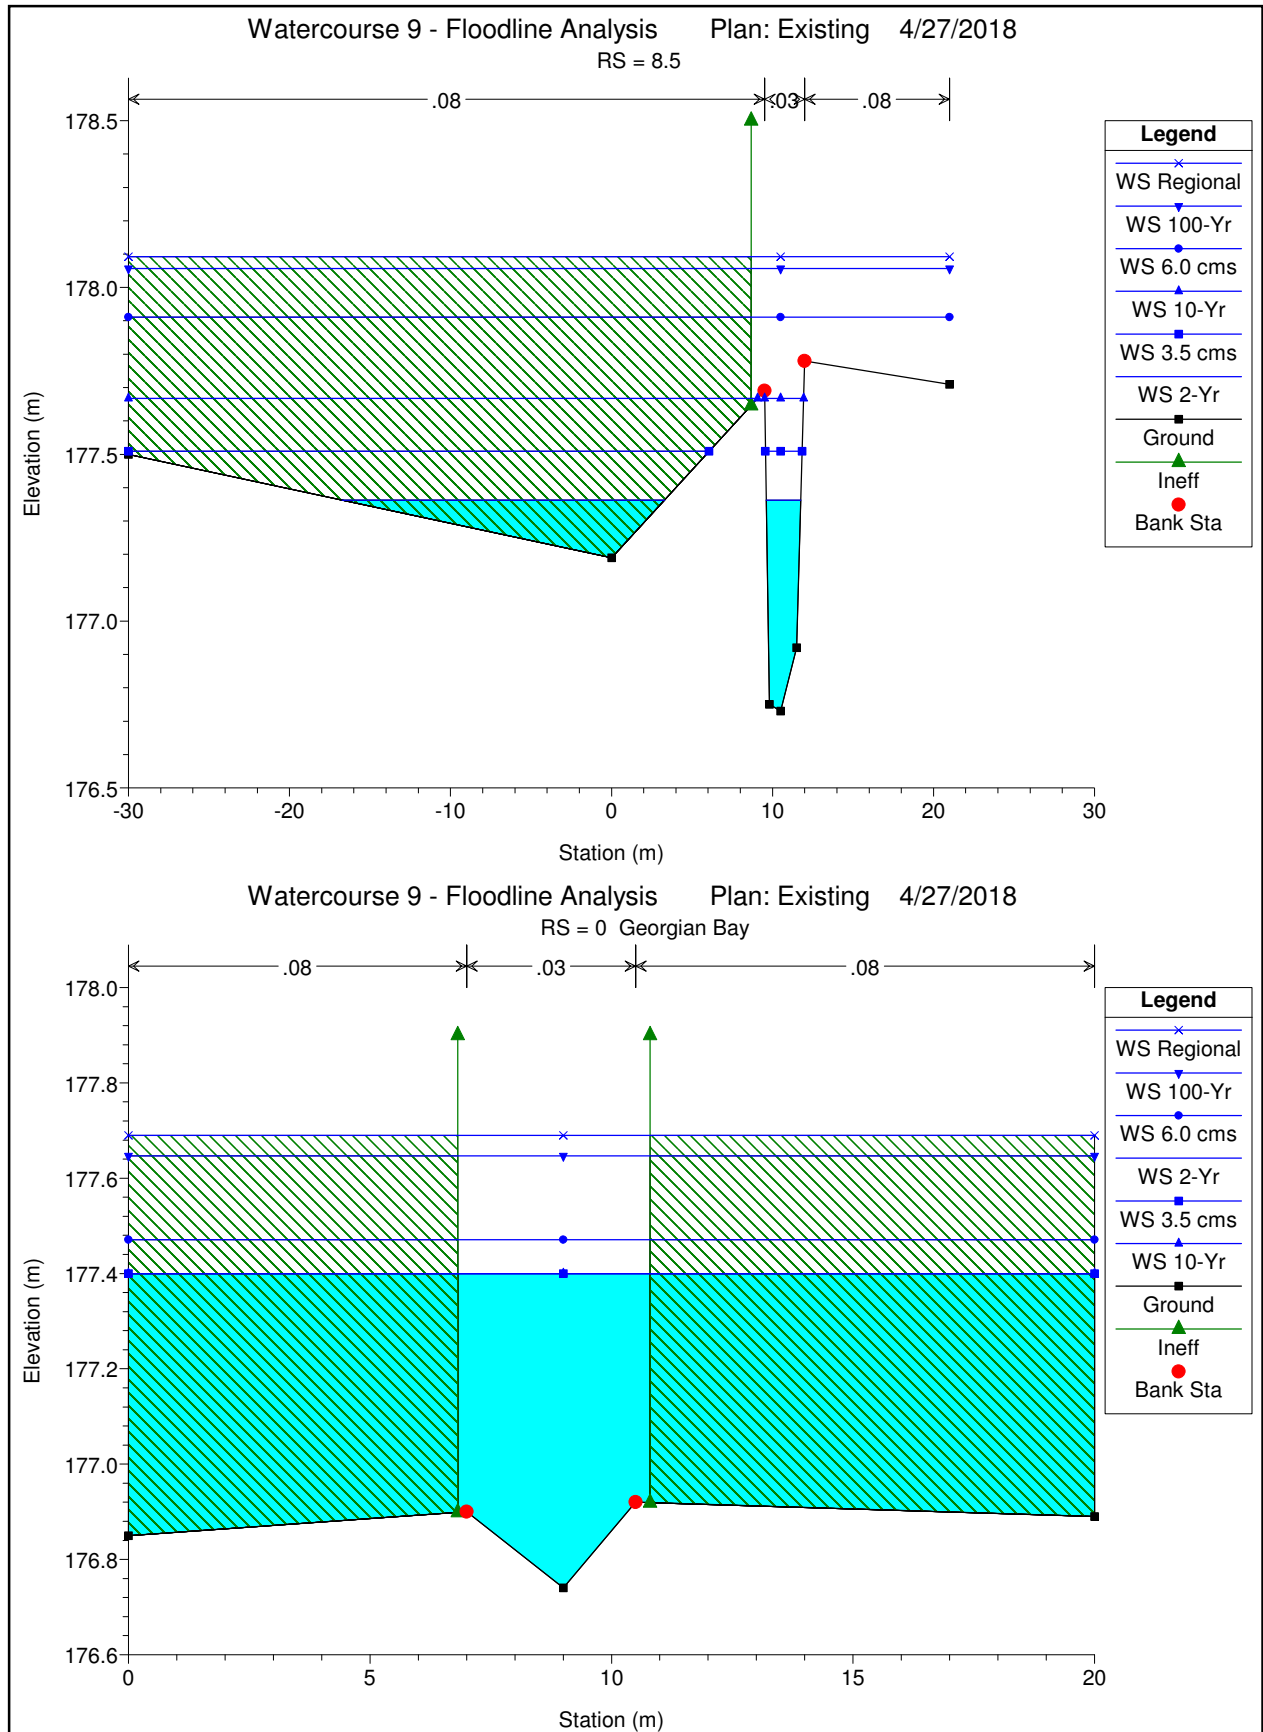

APPENDIX E

Improvement Options & Calculations

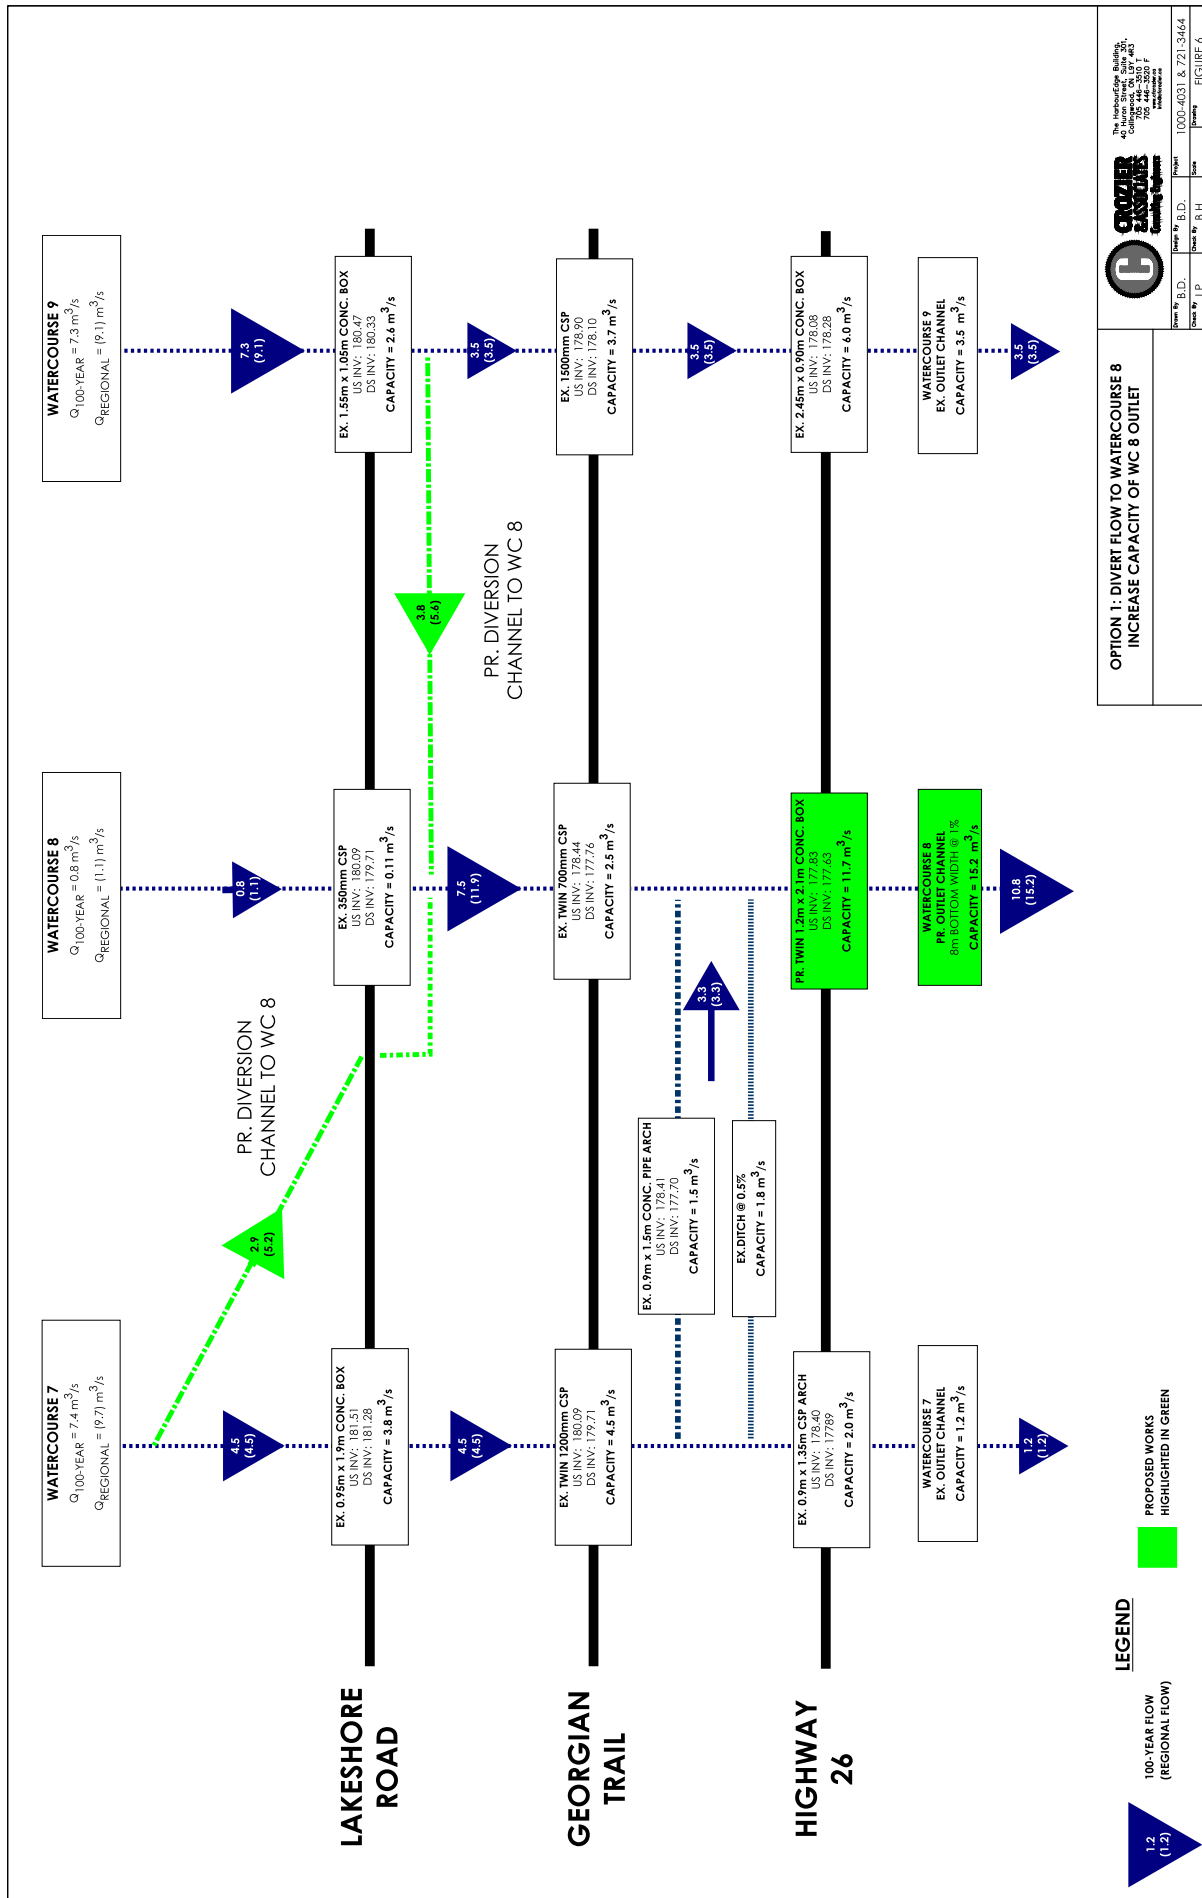

Culvert Calculator Report

WC 8 HWY 26 - Improvement (Option 1)

Solve For: Discharge

Culvert Summary			
Allowable HW Elevation	179.31 m	Headwater Depth/Height	1.21
Computed Headwater Elev.	179.31 m	Discharge	11.7490 m ³ /s
Inlet Control HW Elev.	179.31 m	Tailwater Elevation	178.43 m
Outlet Control HW Elev.	179.30 m	Control Type	Inlet Control
Grades			
Upstream Invert	177.83 m	Downstream Invert	177.63 m
Length	25.00 m	Constructed Slope	0.008000 m/m
Hydraulic Profile			
Profile	S2	Depth, Downstream	0.76 m
Slope Type	Steep	Normal Depth	0.71 m
Flow Regime	Supercritical	Critical Depth	0.92 m
Velocity Downstream	3.64 m/s	Critical Slope	0.003902 m/m
Section			
Section Shape	Box	Mannings Coefficient	0.013
Section Material	Concrete	Span	2.13 m
Section Size	2130 x 1220 mm	Rise	1.22 m
Number Sections	2		
Outlet Control Properties			
Outlet Control HW Elev.	179.30 m	Upstream Velocity Head	0.46 m
Ke	0.20	Entrance Loss	0.09 m
Inlet Control Properties			
Inlet Control HW Elev.	179.31 m	Flow Control	Transition
Inlet Type	90° headwall w 45° bevels	Area Full	5.2 m ²
K	0.49500	HDS 5 Chart	10
M	0.66700	HDS 5 Scale	2
C	0.03140	Equation Form	2
Y	0.82000		

WC8 OUTLET - Improved (Option 1)


Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Roughness Coefficient	0.050	
Channel Slope	0.01000	m/m
Normal Depth	0.90	m
Left Side Slope	3.00	m/m (H:V)
Right Side Slope	3.00	m/m (H:V)
Bottom Width	8.00	m
Discharge	15.23	m³/s

Cross Section Image

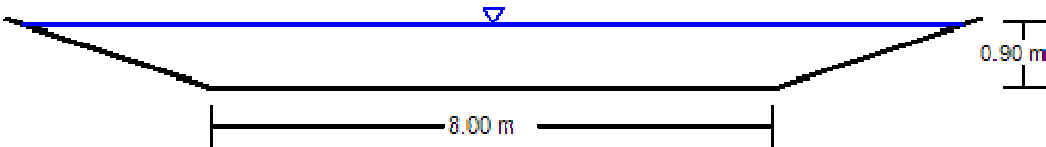

V: 1
H: 1

WC8 OUTLET - IMPROVED

Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Roughness Coefficient	0.050	
Channel Slope	0.01000	m/m
Normal Depth	0.90	m
Left Side Slope	3.00	m/m (H:V)
Right Side Slope	3.00	m/m (H:V)
Bottom Width	8.00	m

Results

Discharge	15.23	m³/s
Flow Area	9.63	m²
Wetted Perimeter	13.69	m
Hydraulic Radius	0.70	m
Top Width	13.40	m
Critical Depth	0.66	m
Critical Slope	0.03065	m/m
Velocity	1.58	m/s
Velocity Head	0.13	m
Specific Energy	1.03	m
Froude Number	0.60	
Flow Type	Subcritical	

GVF Input Data

Downstream Depth	0.00	m
Length	0.00	m
Number Of Steps	0	


GVF Output Data

Upstream Depth	0.00	m
Profile Description		
Profile Headloss	0.00	m
Downstream Velocity	Infinity	m/s
Upstream Velocity	Infinity	m/s
Normal Depth	0.90	m
Critical Depth	0.66	m
Channel Slope	0.01000	m/m

WC8 OUTLET - IMPROVED

GVF Output Data

Critical Slope 0.03065 m/m

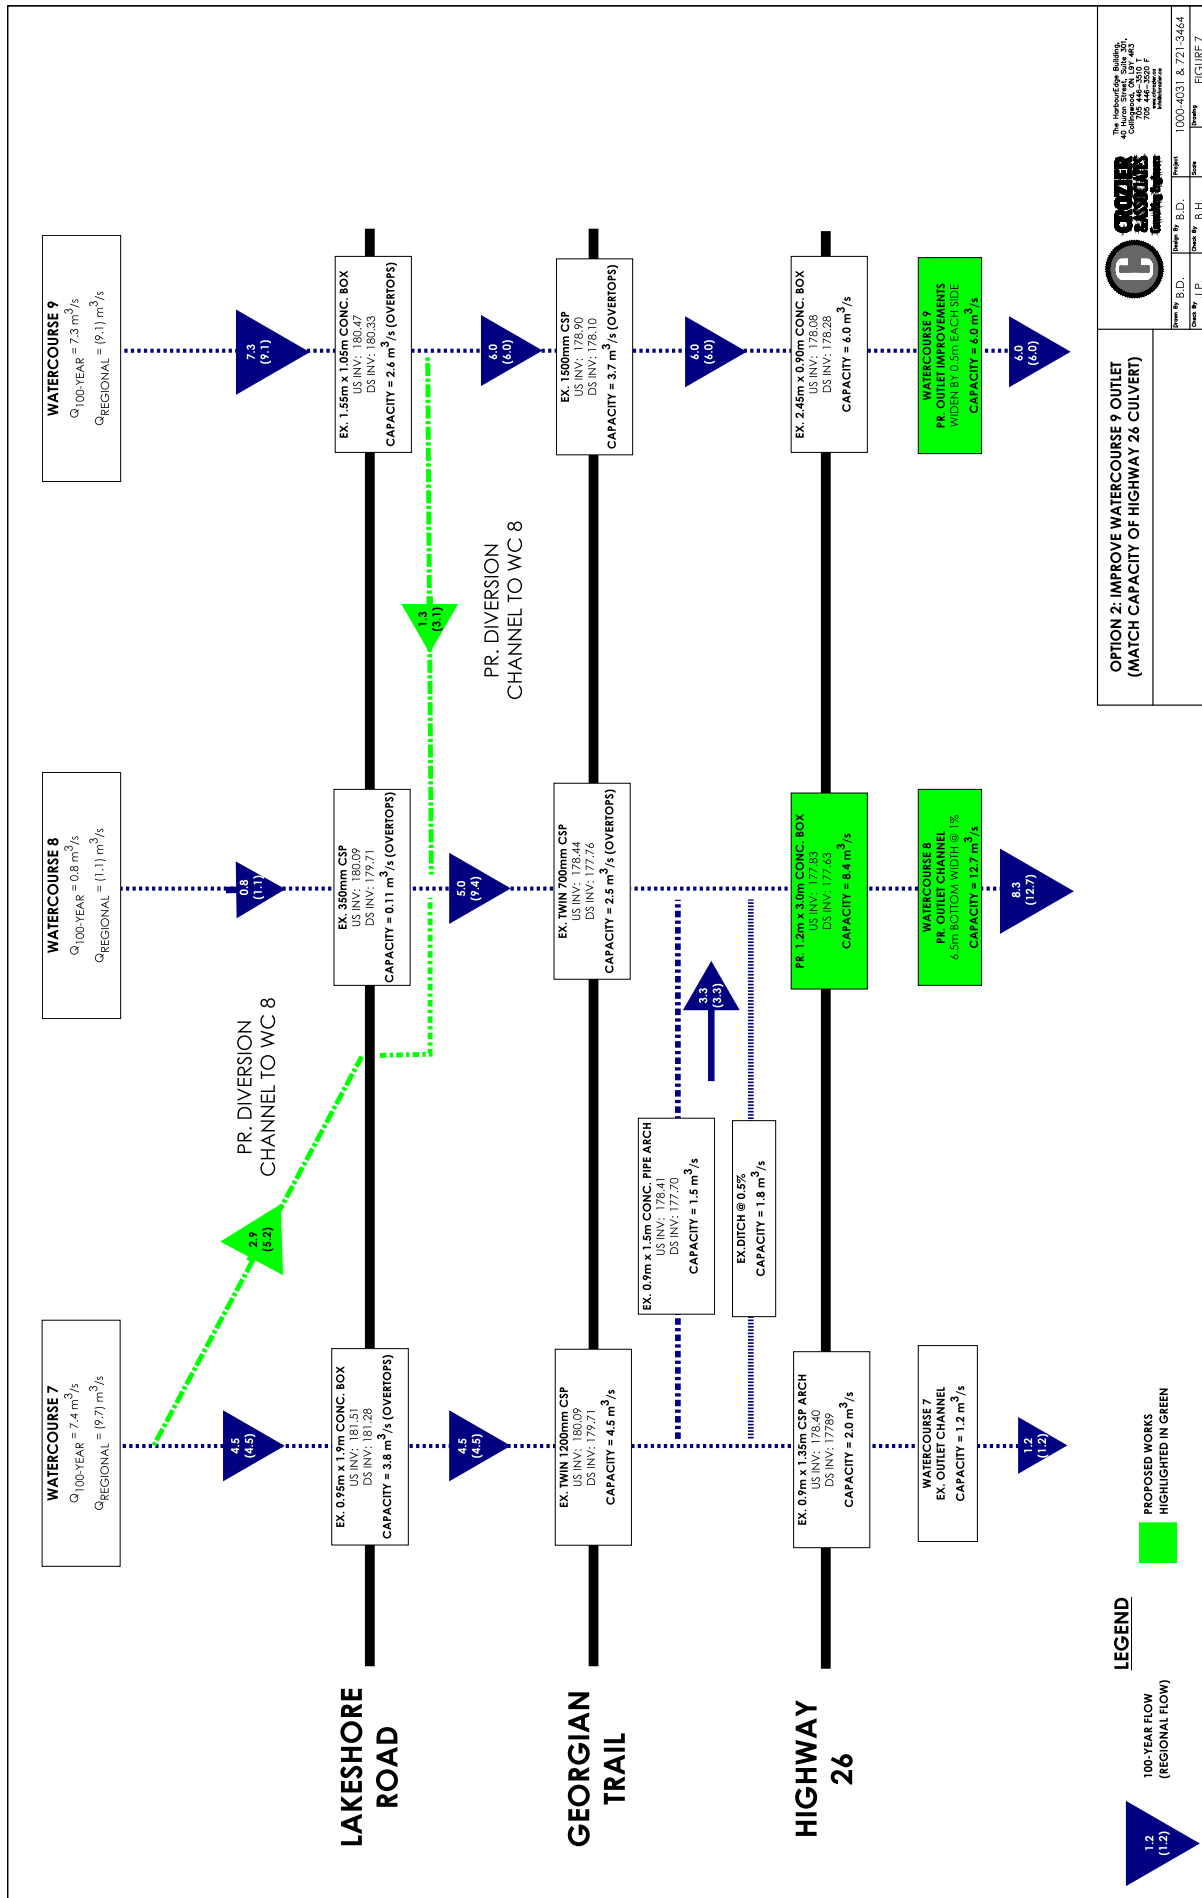

Culvert Calculator Report WC 8 Hwy. 26 - Improved (Option 2)

Solve For: Discharge

Culvert Summary			
Allowable HW Elevation	179.31 m	Headwater Depth/Height	1.21
Computed Headwater Elevation	179.31 m	Discharge	8.3921 m³/s
Inlet Control HW Elev.	179.31 m	Tailwater Elevation	178.45 m
Outlet Control HW Elev.	179.30 m	Control Type	Inlet Control
Grades			
Upstream Invert	177.83 m	Downstream Invert	177.63 m
Length	25.00 m	Constructed Slope	0.008000 m/m
Hydraulic Profile			
Profile	S2	Depth, Downstream	0.74 m
Slope Type	Steep	Normal Depth	0.67 m
Flow Regime	Supercritical	Critical Depth	0.92 m
Velocity Downstream	3.74 m/s	Critical Slope	0.003197 m/m
Section			
Section Shape	Box	Mannings Coefficient	0.013
Section Material	Concrete	Span	3.05 m
Section Size	3050 x 1220 mm	Rise	1.22 m
Number Sections	1		
Outlet Control Properties			
Outlet Control HW Elev.	179.30 m	Upstream Velocity Head	0.46 m
Ke	0.20	Entrance Loss	0.09 m
Inlet Control Properties			
Inlet Control HW Elev.	179.31 m	Flow Control	N/A
Inlet Type	90° headwall w 45° bevels	Area Full	3.7 m²
K	0.49500	HDS 5 Chart	10
M	0.66700	HDS 5 Scale	2
C	0.03140	Equation Form	2
Y	0.82000		

WC8 OUTLET - Improved (Option 2)

Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Roughness Coefficient	0.050	
Channel Slope	0.01000	m/m
Normal Depth	0.90	m
Left Side Slope	3.00	m/m (H:V)
Right Side Slope	3.00	m/m (H:V)
Bottom Width	6.50	m

Results

Discharge	12.79	m³/s
Flow Area	8.28	m²
Wetted Perimeter	12.19	m
Hydraulic Radius	0.68	m
Top Width	11.90	m
Critical Depth	0.66	m
Critical Slope	0.03104	m/m
Velocity	1.55	m/s
Velocity Head	0.12	m
Specific Energy	1.02	m
Froude Number	0.59	
Flow Type	Subcritical	

GVF Input Data

Downstream Depth	0.00	m
Length	0.00	m
Number Of Steps	0	

GVF Output Data

Upstream Depth	0.00	m
Profile Description		
Profile Headloss	0.00	m
Downstream Velocity	Infinity	m/s
Upstream Velocity	Infinity	m/s
Normal Depth	0.90	m
Critical Depth	0.66	m
Channel Slope	0.01000	m/m

WC8 OUTLET - Improved (Option 2)

GVF Output Data

Critical Slope 0.03104 m/m

WC8 OUTLET - Improvement (Option 2)


Project Description

Friction Method	Manning Formula
Solve For	Discharge


Input Data


Roughness Coefficient	0.050
Channel Slope	0.01000 m/m
Normal Depth	0.90 m
Left Side Slope	3.00 m/m (H:V)
Right Side Slope	3.00 m/m (H:V)
Bottom Width	6.50 m
Discharge	12.79 m³/s


Cross Section Image

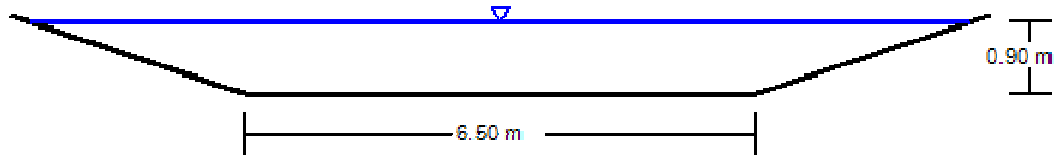



V: 1
H: 1

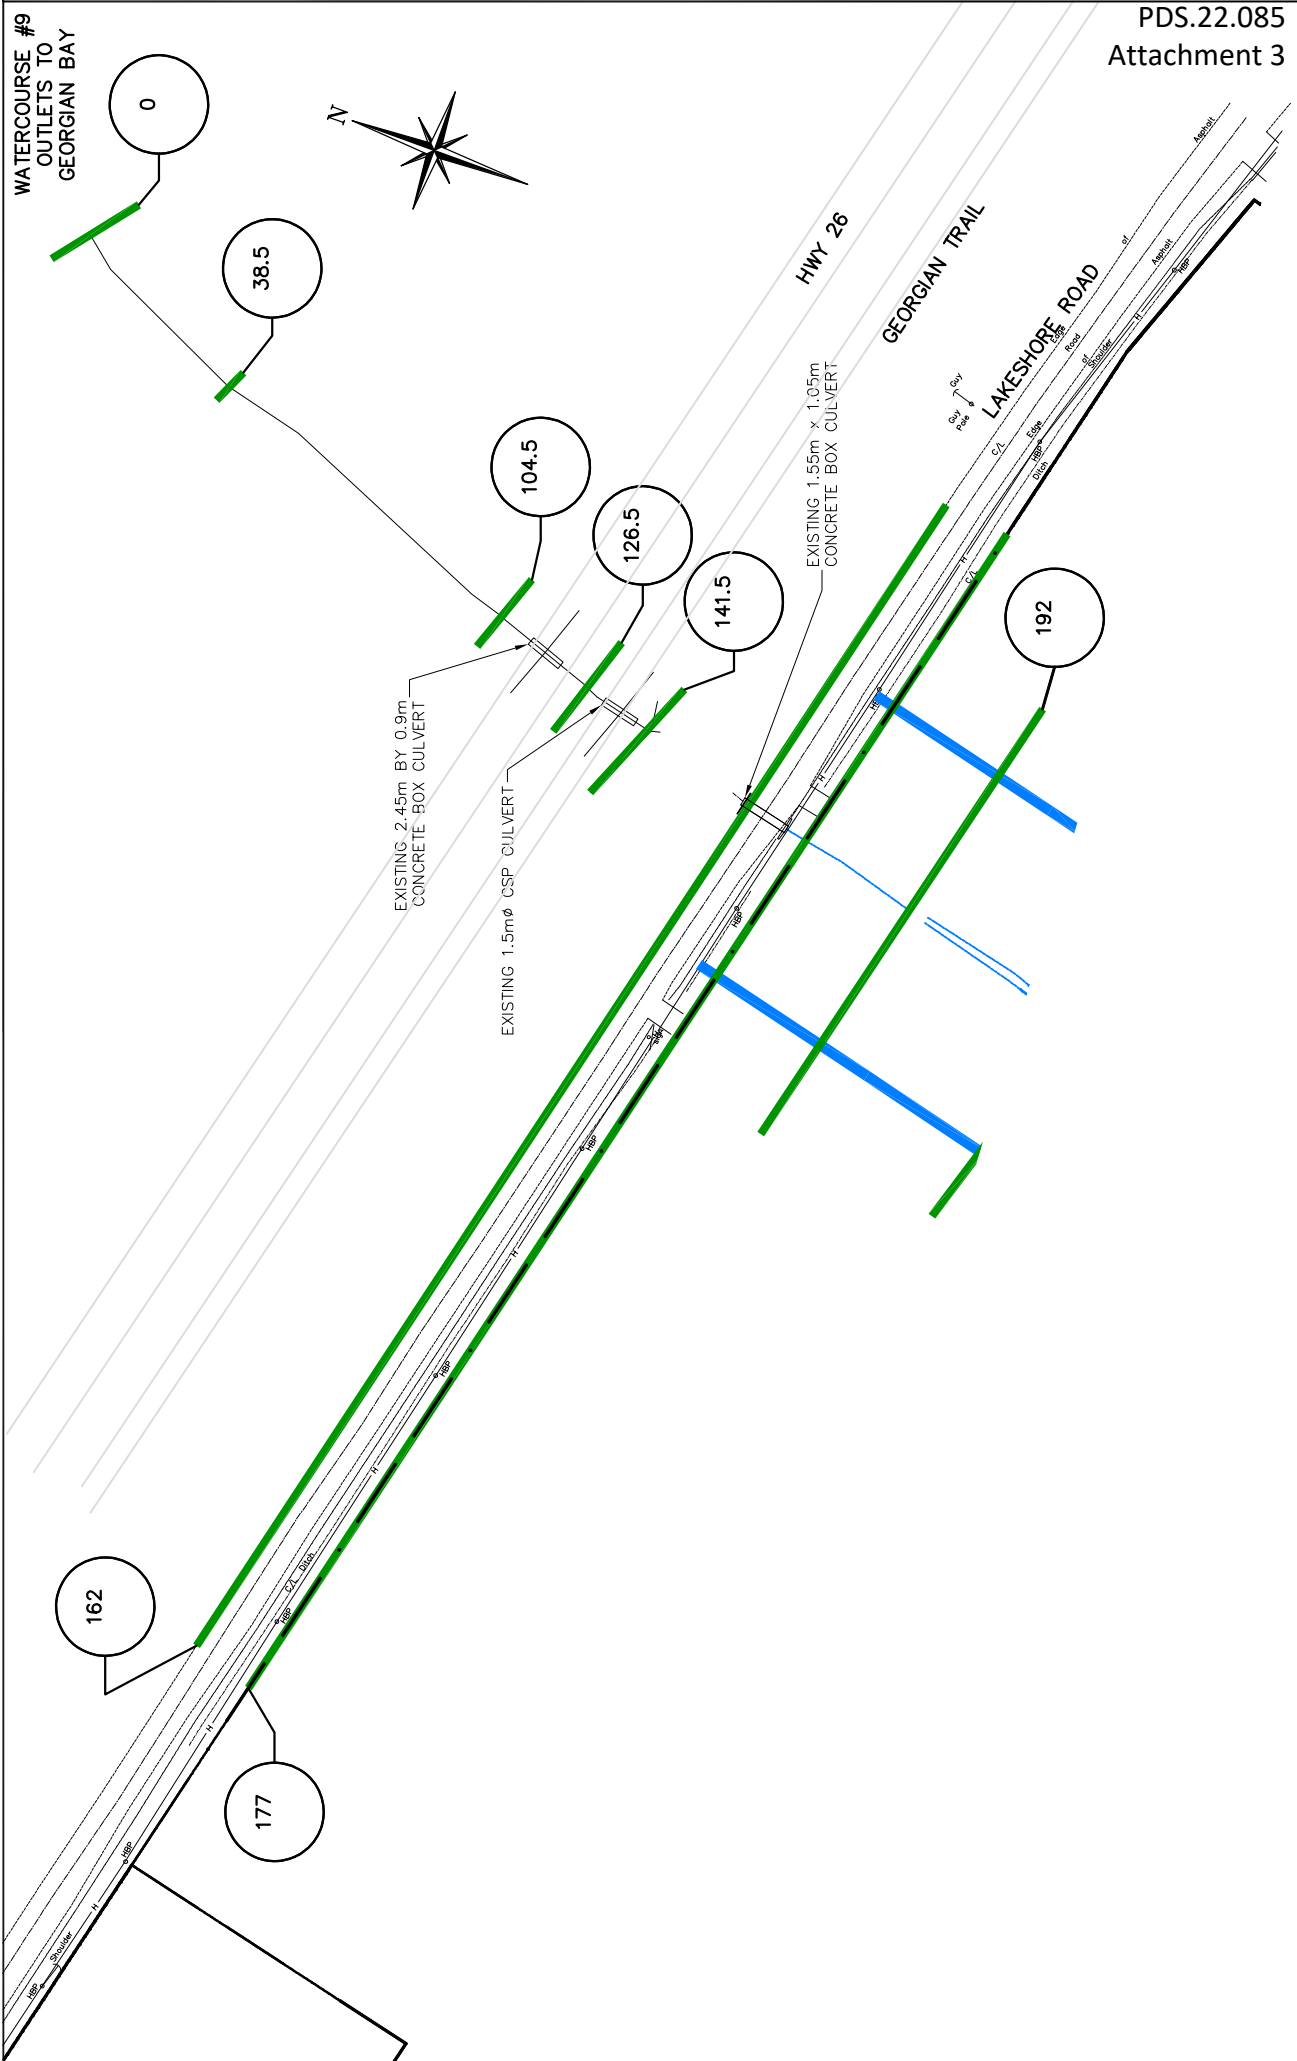

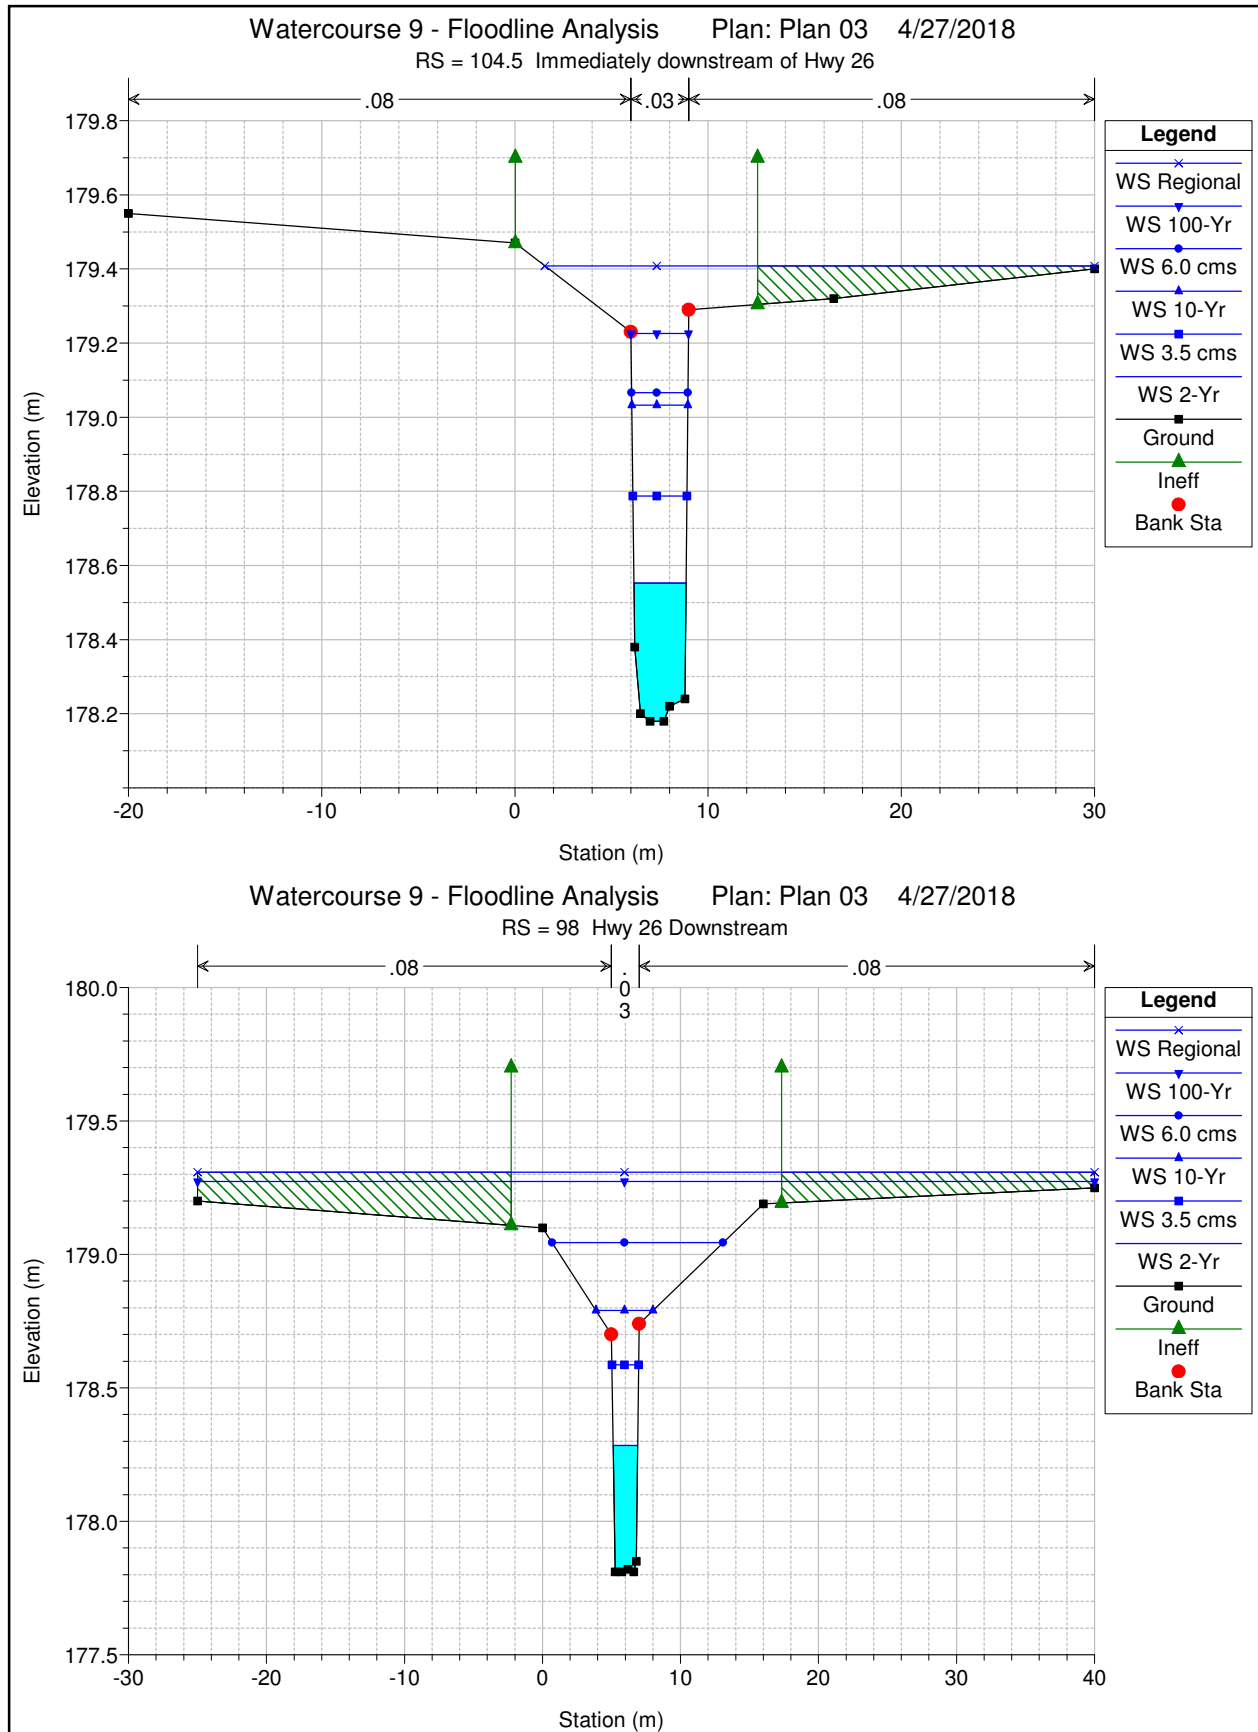

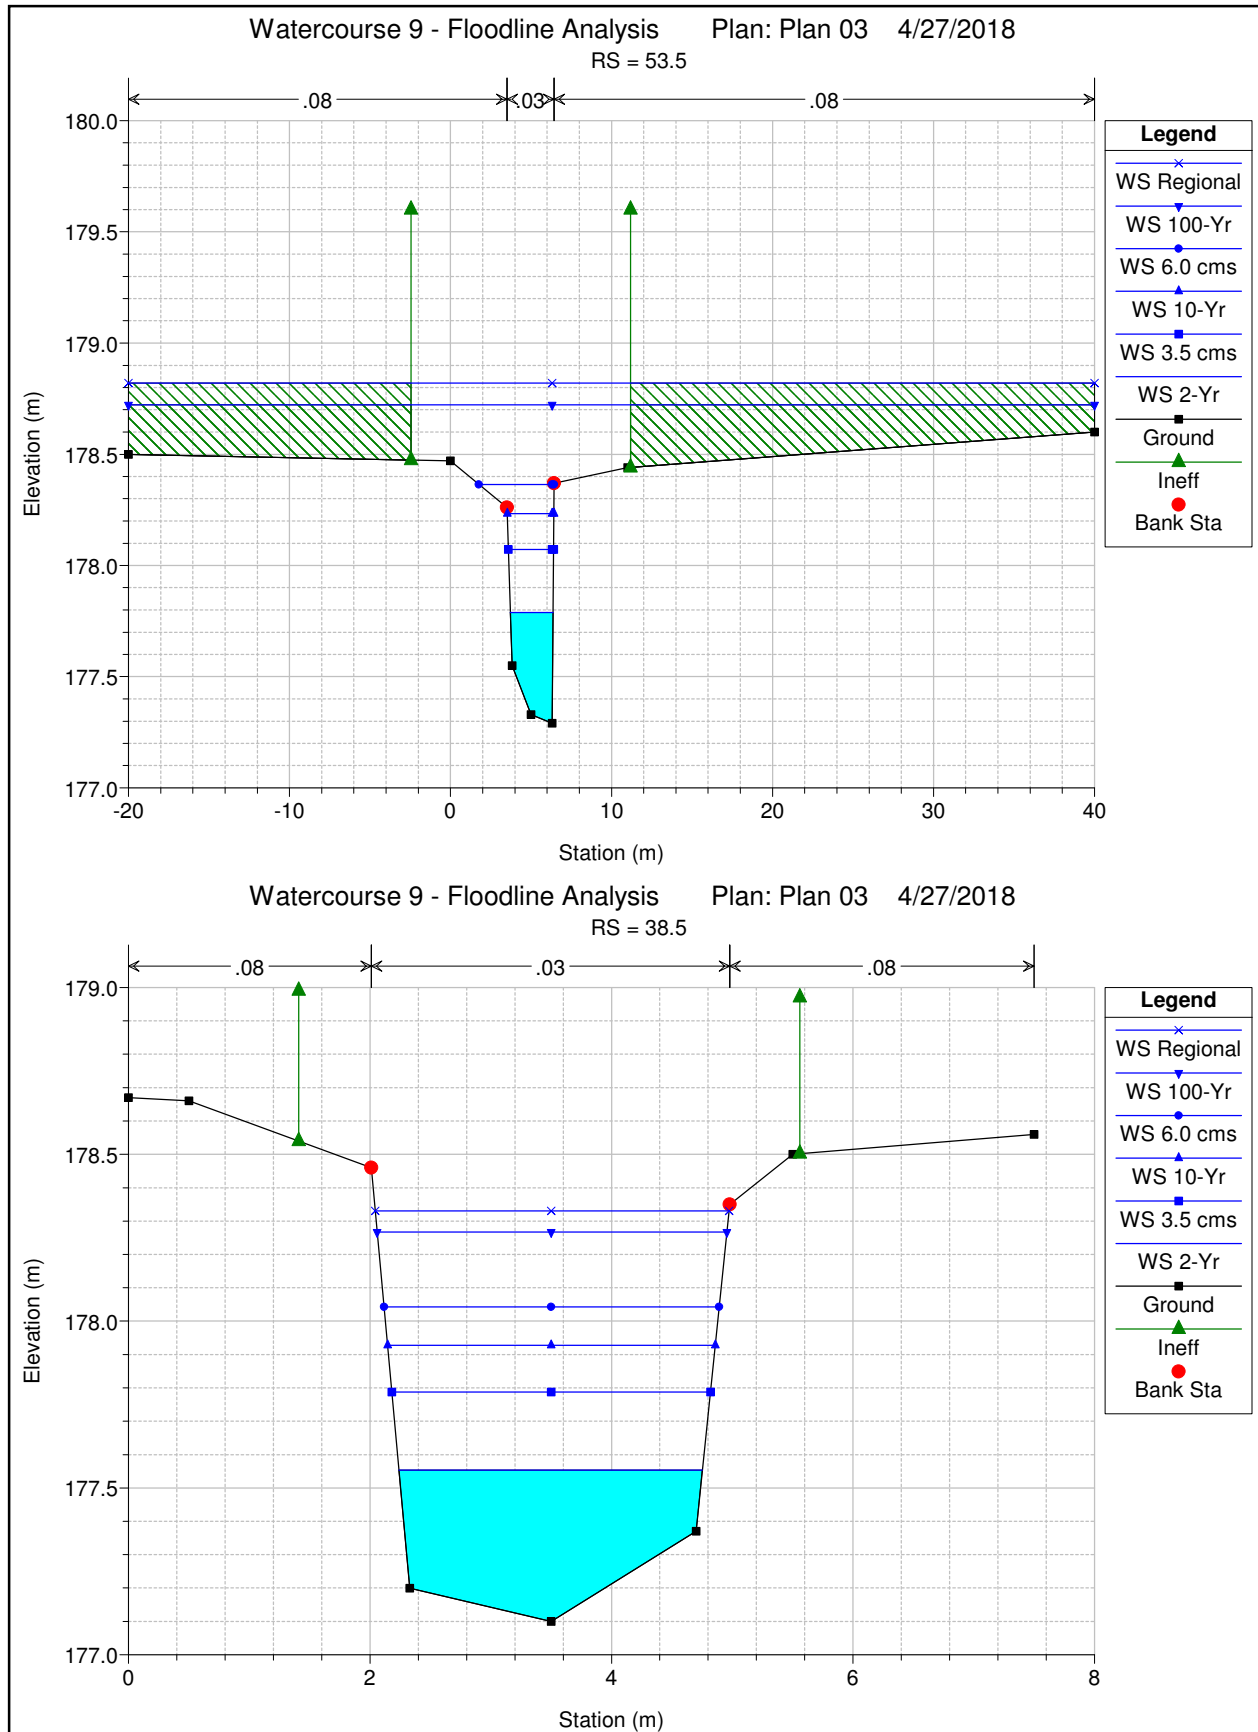

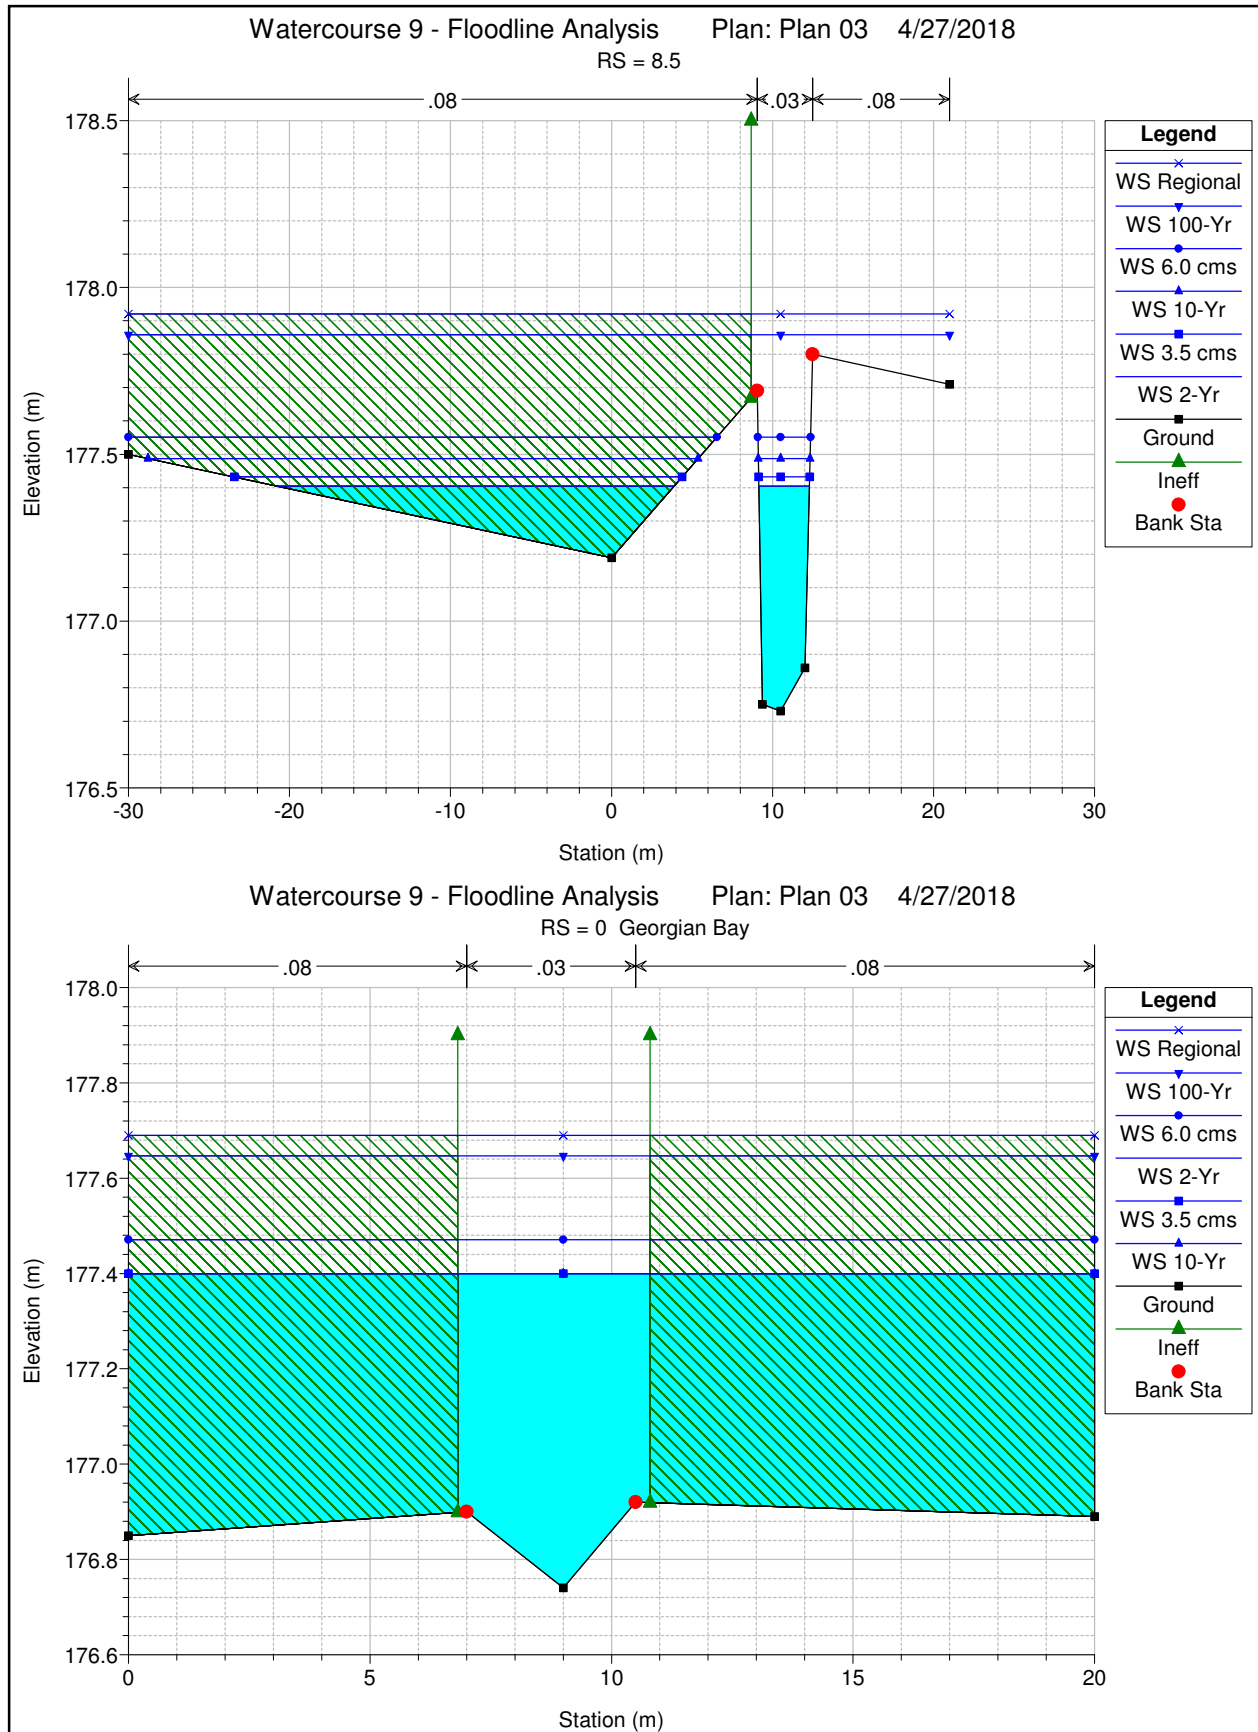

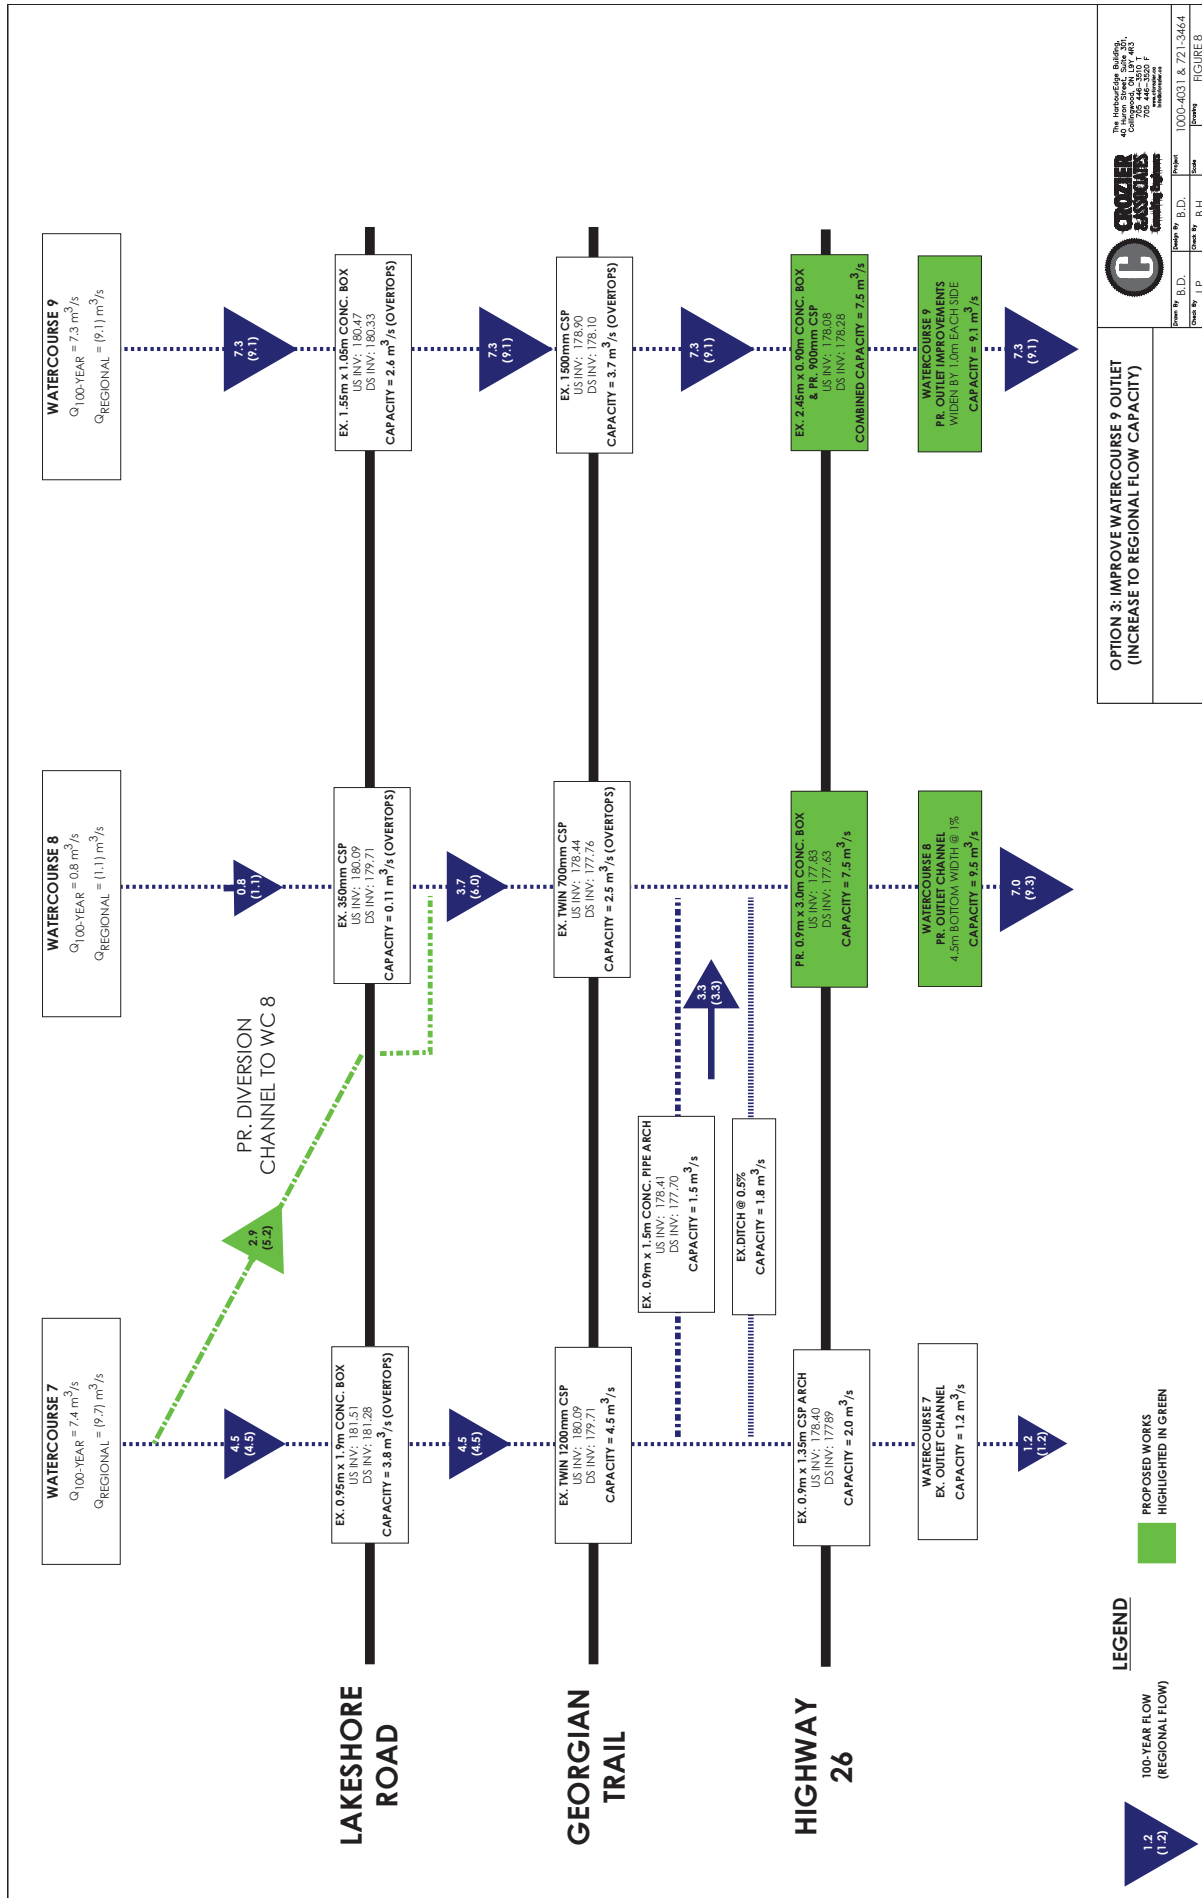

Culvert Calculator Report WC 8 Hwy. 26 Improvement (Option 3)

Solve For: Discharge

Culvert Summary			
Allowable HW Elevation	179.31 m	Headwater Depth/Height	1.62
Computed Headwater Elev.	179.31 m	Discharge	7.4436 m ³ /s
Inlet Control HW Elev.	179.31 m	Tailwater Elevation	178.45 m
Outlet Control HW Elev.	179.18 m	Control Type	Inlet Control
Grades			
Upstream Invert	177.83 m	Downstream Invert	177.63 m
Length	25.00 m	Constructed Slope	0.008000 m/m
Hydraulic Profile			
Profile	S2	Depth, Downstream	0.67 m
Slope Type	Steep	Normal Depth	0.61 m
Flow Regime	Supercritical	Critical Depth	0.85 m
Velocity Downstream	3.62 m/s	Critical Slope	0.003157 m/m
Section			
Section Shape	Box	Mannings Coefficient	0.013
Section Material	Concrete	Span	3.05 m
Section Size	3050 x 910 mm	Rise	0.91 m
Number Sections	1		
Outlet Control Properties			
Outlet Control HW Elev.	179.18 m	Upstream Velocity Head	0.42 m
Ke	0.20	Entrance Loss	0.08 m
Inlet Control Properties			
Inlet Control HW Elev.	179.31 m	Flow Control	Submerged
Inlet Type	90° headwall w 45° bevels	Area Full	2.8 m ²
K	0.49500	HDS 5 Chart	10
M	0.66700	HDS 5 Scale	2
C	0.03140	Equation Form	2
Y	0.82000		

WC8 OUTLET - Improved (Option 3)

Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Roughness Coefficient	0.050	
Channel Slope	0.01000	m/m
Normal Depth	0.90	m
Left Side Slope	3.00	m/m (H:V)
Right Side Slope	3.00	m/m (H:V)
Bottom Width	4.50	m

Results

Discharge	9.58	m³/s
Flow Area	6.48	m²
Wetted Perimeter	10.19	m
Hydraulic Radius	0.64	m
Top Width	9.90	m
Critical Depth	0.66	m
Critical Slope	0.03179	m/m
Velocity	1.48	m/s
Velocity Head	0.11	m
Specific Energy	1.01	m
Froude Number	0.58	
Flow Type	Subcritical	

GVF Input Data

Downstream Depth	0.00	m
Length	0.00	m
Number Of Steps	0	

GVF Output Data

Upstream Depth	0.00	m
Profile Description		
Profile Headloss	0.00	m
Downstream Velocity	Infinity	m/s
Upstream Velocity	Infinity	m/s
Normal Depth	0.90	m
Critical Depth	0.66	m
Channel Slope	0.01000	m/m

WC8 OUTLET - Improved (Option 3)

GVF Output Data

Critical Slope	0.03179	m/m
----------------	---------	-----

WC8 OUTLET - Improved (Option 3)


Project Description

Friction Method	Manning Formula
Solve For	Discharge

Input Data

Roughness Coefficient	0.050
Channel Slope	0.01000 m/m
Normal Depth	0.90 m
Left Side Slope	3.00 m/m (H:V)
Right Side Slope	3.00 m/m (H:V)
Bottom Width	4.50 m
Discharge	9.58 m³/s

Cross Section Image

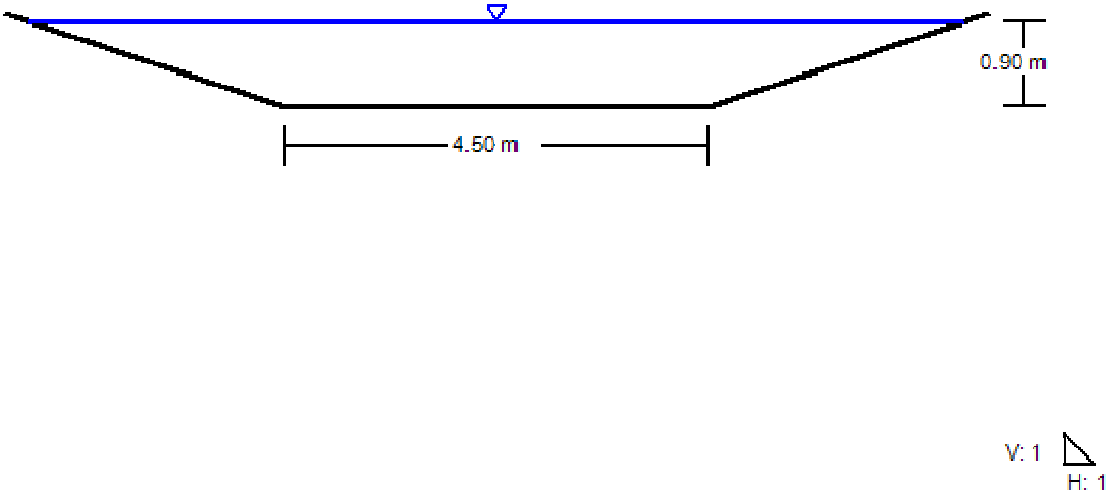



Culvert Calculator Report


WC 9 HWY. 26 - Improvement (Option 3) - Additional CSP

Solve For: Discharge

Culvert Summary			
Allowable HW Elevation	179.70 m	Headwater Depth/Height	1.77
Computed Headwater Elev.	179.70 m	Discharge	1.5394 m³/s
Inlet Control HW Elev.	179.49 m	Tailwater Elevation	178.92 m
Outlet Control HW Elev.	179.70 m	Control Type	Outlet Control
Grades			
Upstream Invert	178.08 m	Downstream Invert	178.28 m
Length	11.30 m	Constructed Slope	-0.017699 m/m
Hydraulic Profile			
Profile	CompositeA2PressureProfile	Depth, Downstream	0.73 m
Slope Type	Adverse	Normal Depth	N/A m
Flow Regime	Subcritical	Critical Depth	0.73 m
Velocity Downstream	2.74 m/s	Critical Slope	0.023813 m/m
Section			
Section Shape	Circular	Mannings Coefficient	0.024
Section Material	CMP	Span	0.91 m
Section Size	900 mm	Rise	0.91 m
Number Sections	1		
Outlet Control Properties			
Outlet Control HW Elev.	179.70 m	Upstream Velocity Head	0.28 m
Ke	0.20	Entrance Loss	0.06 m
Inlet Control Properties			
Inlet Control HW Elev.	179.49 m	Flow Control	N/A
Inlet Type	Revealed ring, 33.7° (1.5:1) bevels	Area Full	0.7 m²
K	0.00180	HDS 5 Chart	3
M	2.50000	HDS 5 Scale	B
C	0.02430	Equation Form	1
Y	0.83000		

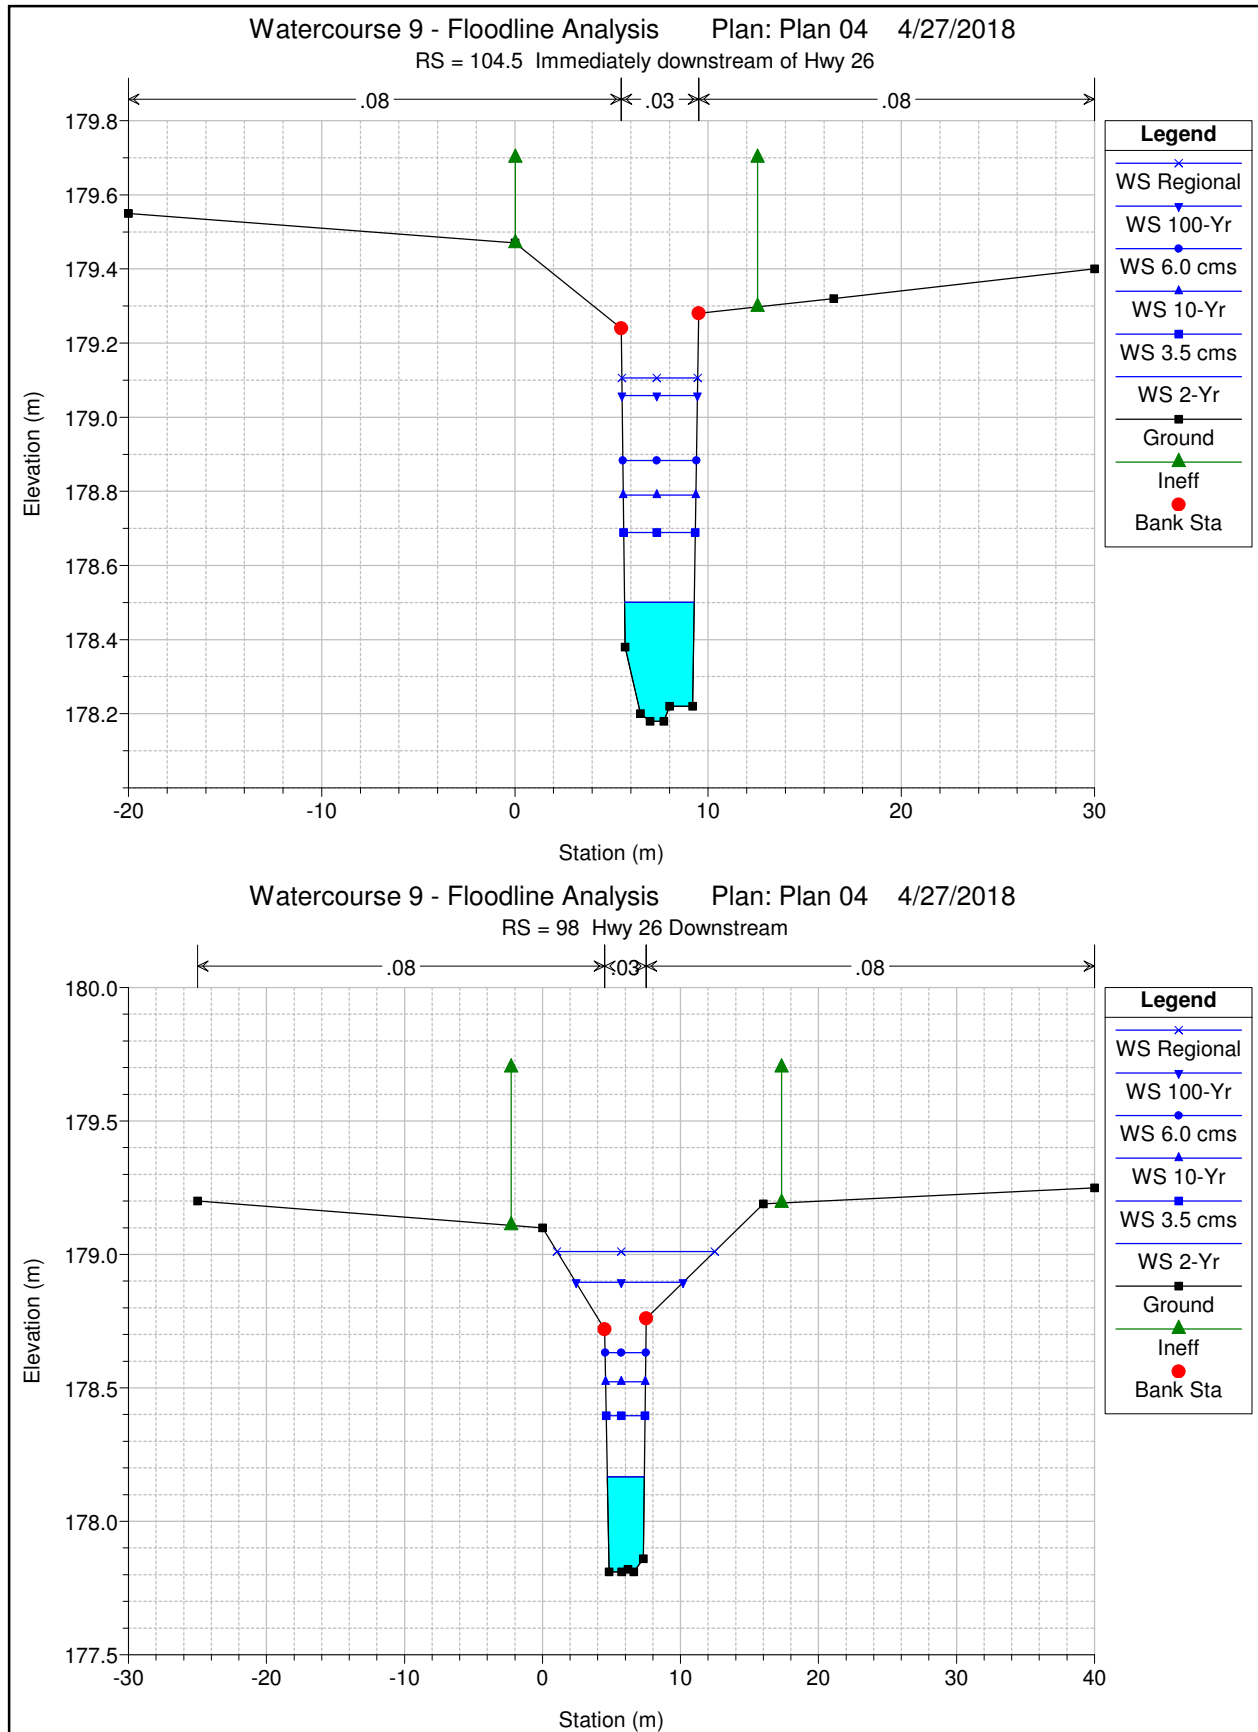


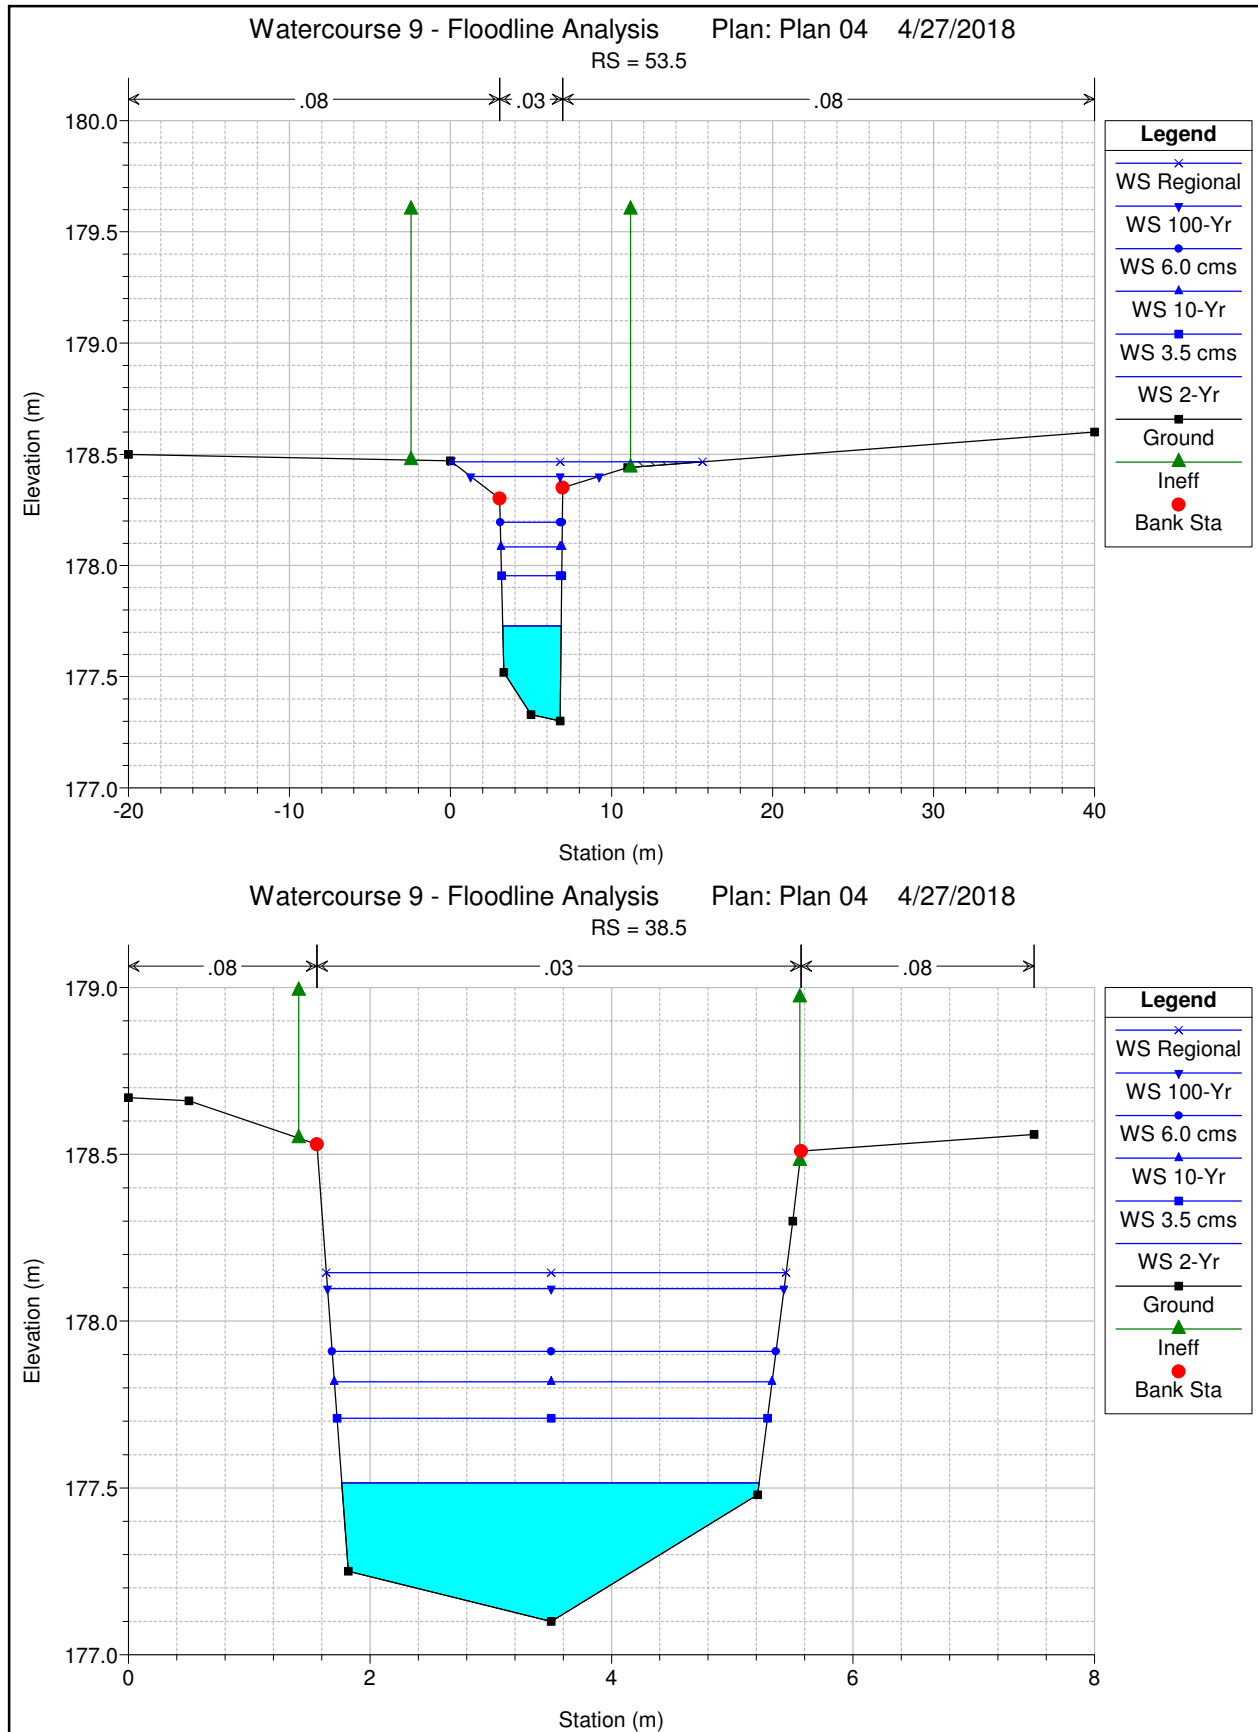

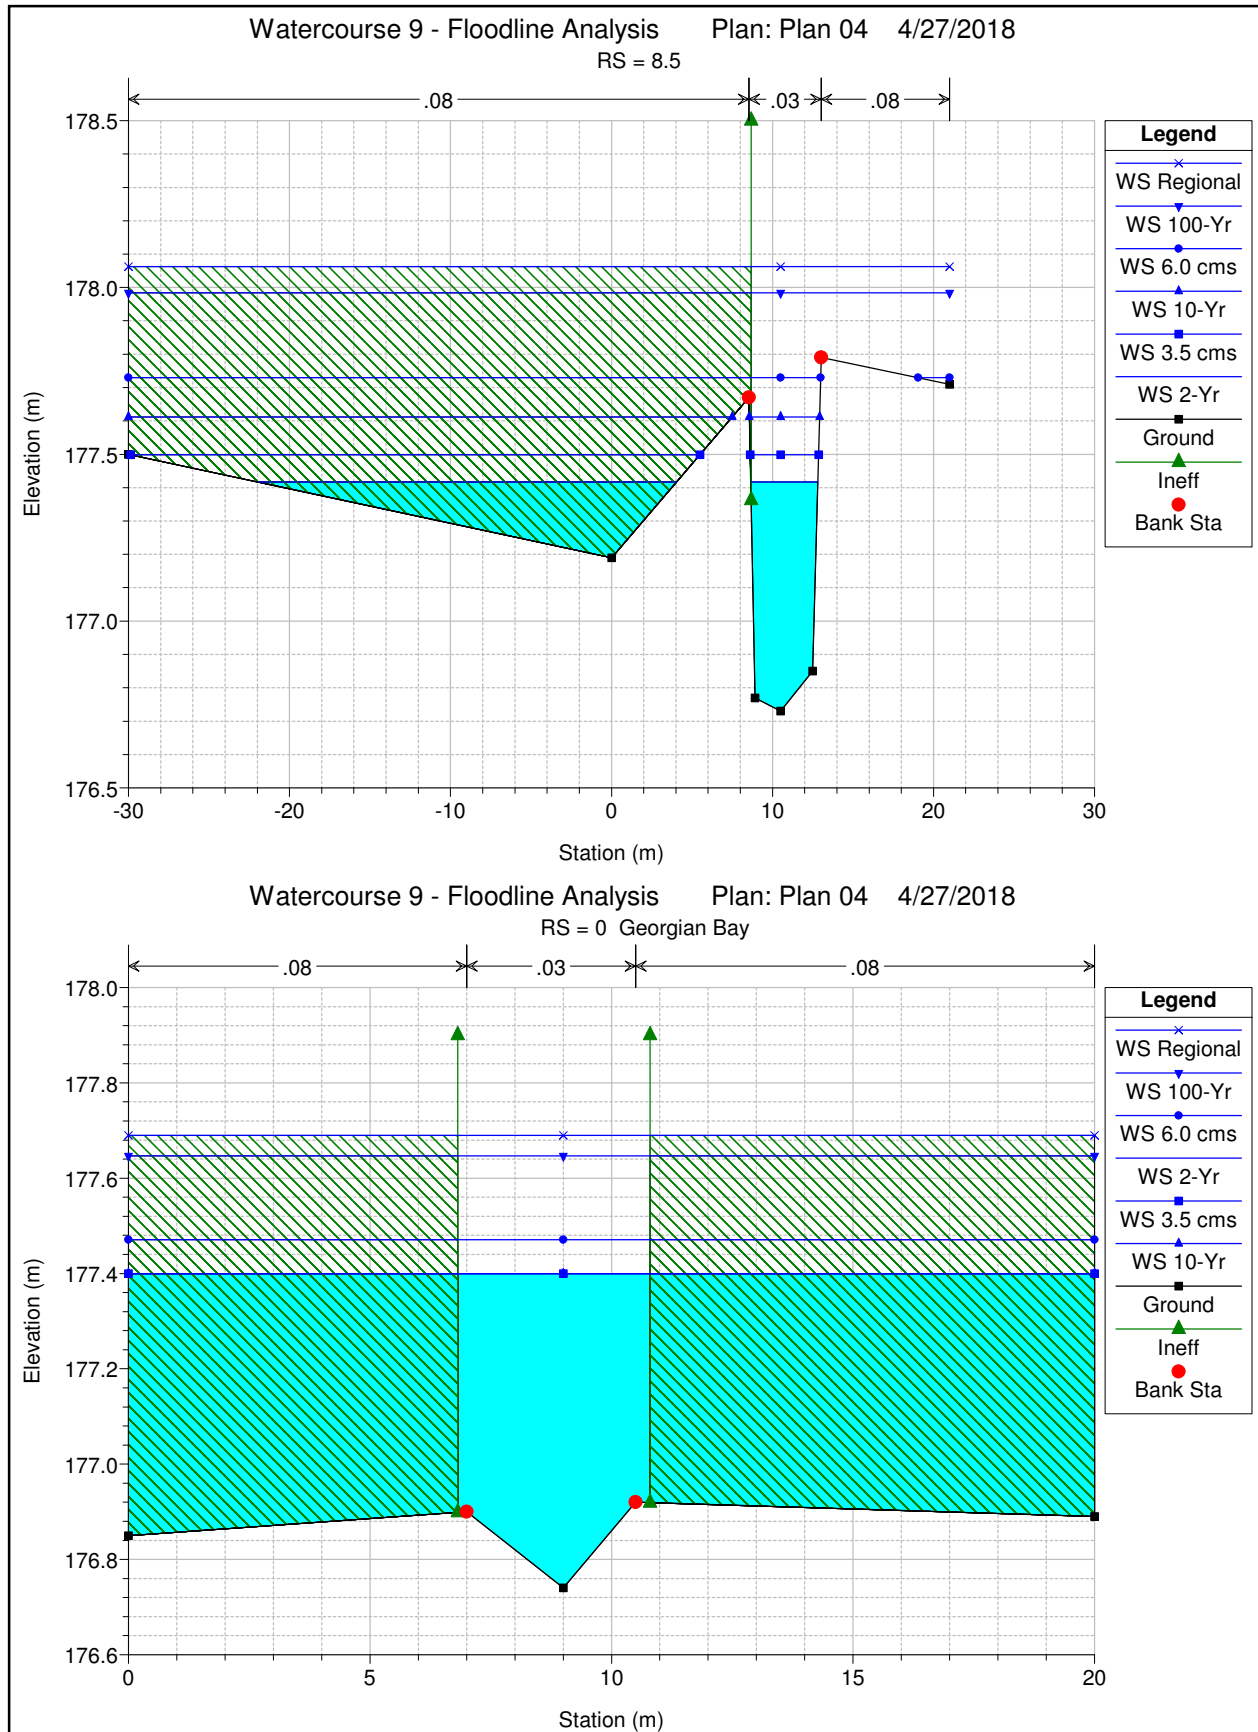


LIST OF FIGURES

- Figure 1:** Existing Subwatershed Catchment Plan
- Figure 2:** Post-development Subwatershed Catchment Plan
- Figure 3:** Watercourse 7, 8, 9 Existing Outlet Infrastructure
- Figure 4:** Drainage Network – Existing Conditions
- Figure 5:** Drainage Network – Option 1
- Figure 6:** Drainage Network – Option 2
- Figure 7:** Drainage Network – Option 3
- Figure 8:** Conceptual Watercourse 7 and Watercourse 9 Flood Relief Channel Plan

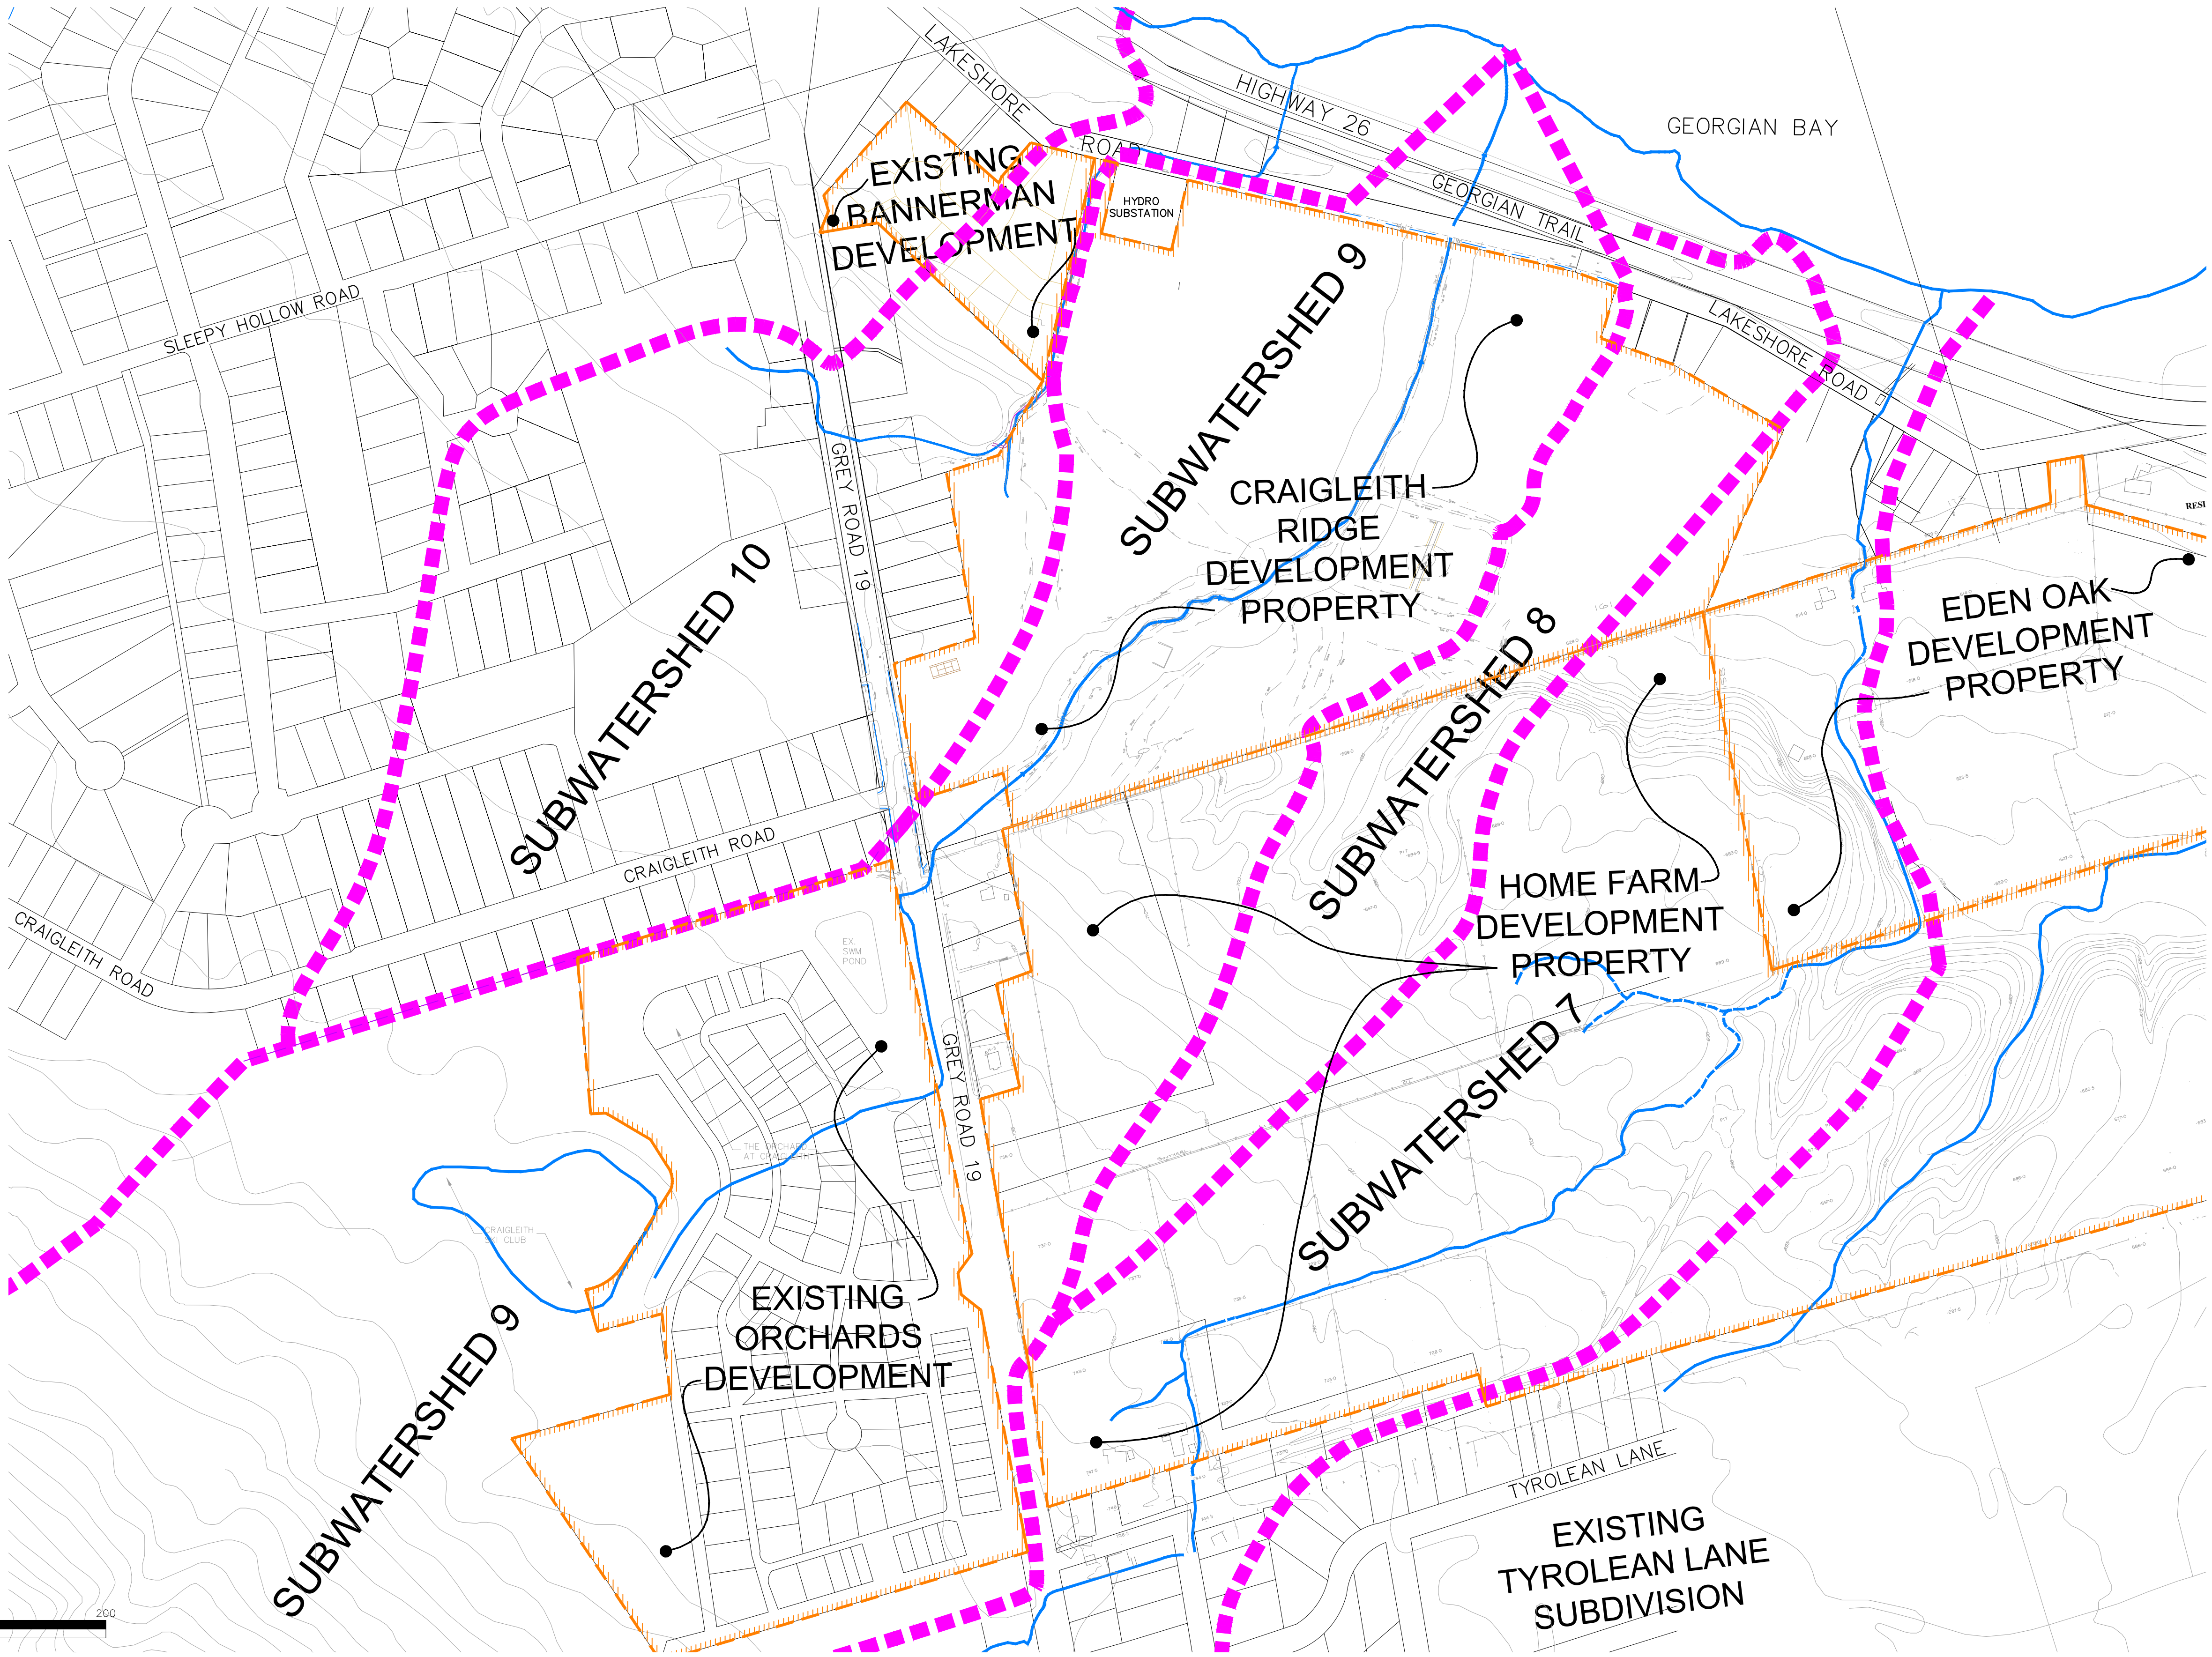

LEGEND

- WATERCOURSE
- DEVELOPMENT'S BOUNDARY
- SUBWATERSHED



- THIS DRAWING IS THE EXCLUSIVE PROPERTY OF C.F. CROZIER & ASSOCIATES INC. AND THE REPRODUCTION OF ANY PART WITHOUT PRIOR WRITTEN CONSENT OF THIS OFFICE IS STRICTLY PROHIBITED.
- THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, LEVELS, AND DATUMS ON SITE AND REPORT ANY DISCREPANCIES OR OMISSIONS TO THIS OFFICE PRIOR TO CONSTRUCTION.
- THIS DRAWING IS TO BE READ AND UNDERSTOOD IN CONJUNCTION WITH ALL OTHER PLANS AND DOCUMENTS APPLICABLE TO THIS PROJECT.
- DO NOT SCALE THE DRAWINGS.
- ALL EXISTING UNDERGROUND UTILITIES TO BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO CONSTRUCTION.

TEMPORARY BENCHMARKS
TBM#1—
TBM#2—
TBM#3—

Town

No.	ISSUE	DATE: MM/DD/YYYY
0	ISSUED FOR CLIENT REVIEW	03/29/2018

FOR DISCUSSION
NOT TO BE USED FOR CONSTRUCTION


CRAIGLEITH REGIONAL SWM PLAN
TOWN OF THE BLUE MOUNTAINS

EXISTING CONDITIONS
WATERSHED PLAN

CROZIER & ASSOCIATES ENGINEERS

110 Pine Street,
Collingwood, ON L9Y 2N9
705 446-3510 T
705 446-3520 F
info@cfcrozier.ca

Drawn By	B.K.	Design By	B.D./B.R.C.H.	Project	1046-4031
Check By	B.D.	Check By	B.R.C.H.	Scale	1:3000
				Drawing	FIGURE1

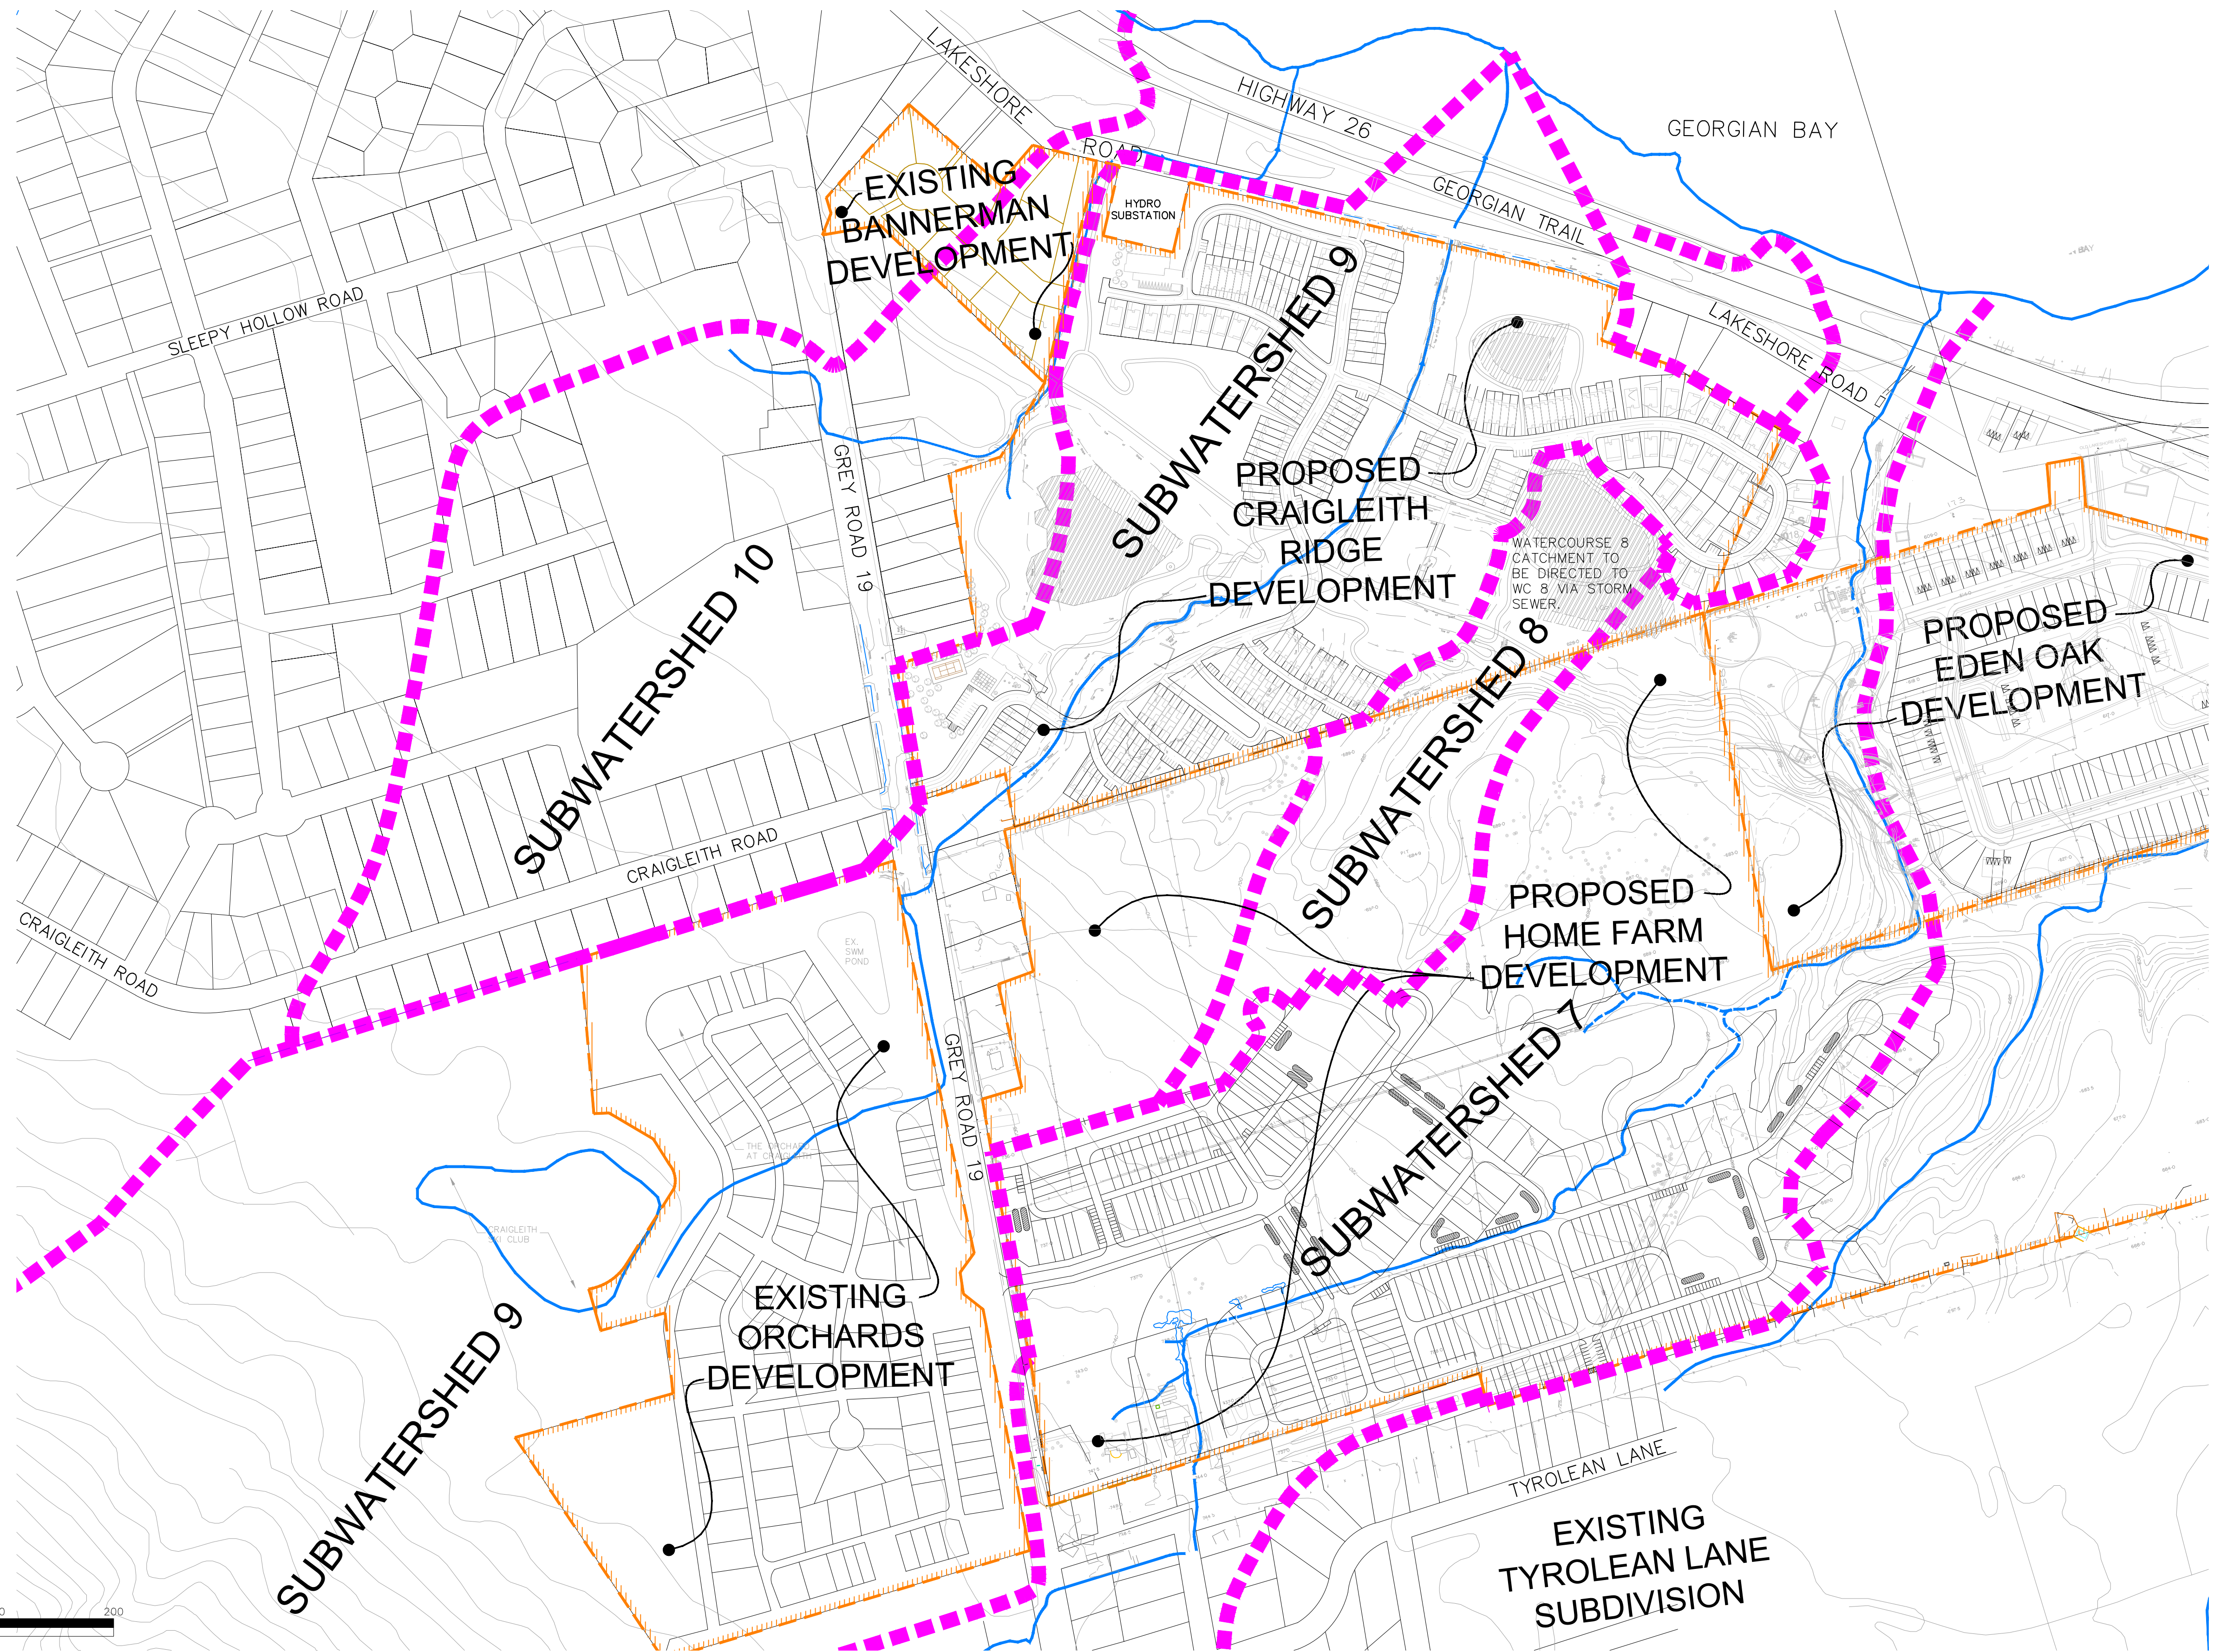

1. THIS DRAWING IS THE EXCLUSIVE PROPERTY OF C.F. CROZIER & ASSOCIATES INC. AND THE REPRODUCTION OF ANY PART WITHOUT PRIOR WRITTEN CONSENT OF THIS OFFICE IS STRICTLY PROHIBITED.
2. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, LEVELS, AND DATUMS ON SITE AND REPORT ANY DISCREPANCIES OR OMISSIONS TO THIS OFFICE PRIOR TO CONSTRUCTION.
3. THIS DRAWING IS TO BE READ AND UNDERSTOOD IN CONJUNCTION WITH ALL OTHER PLANS AND DOCUMENTS APPLICABLE TO THIS PROJECT.
4. DO NOT SCALE THE DRAWINGS.
5. ALL EXISTING UNDERGROUND UTILITIES TO BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO CONSTRUCTION.

TEMPORARY BENCHMARKS
TBM#1 -
TBM#2 -
TBM#3 -

Town

No.	ISSUE	DATE: MM/DD/YYYY
0	ISSUED FOR CLIENT REVIEW	03/29/2018

Engineer

FOR DISCUSSION
NOT TO BE USED FOR CONSTRUCTION

Engineer

Project

CRAIGLEITH REGIONAL SWM PLAN
TOWN OF THE BLUE MOUNTAINS

Drawing


POST-DEVELOPMENT
WATERSHED PLAN



**CROZIER
& ASSOCIATES
ENGINEERS**

110 Pine Street,
Collingwood, ON L9Y 2N9
705 446-3510 T
705 446-3520 F
www.cfacrozier.ca
info@cfacrozier.ca

Drawn By	B.K.	Design By	B.D./B.R.C.H.	Project	1046-4031
Check By	B.D.	Check By	B.R.C.H.	Scale	1:3000
				Drawing	FIGURE2

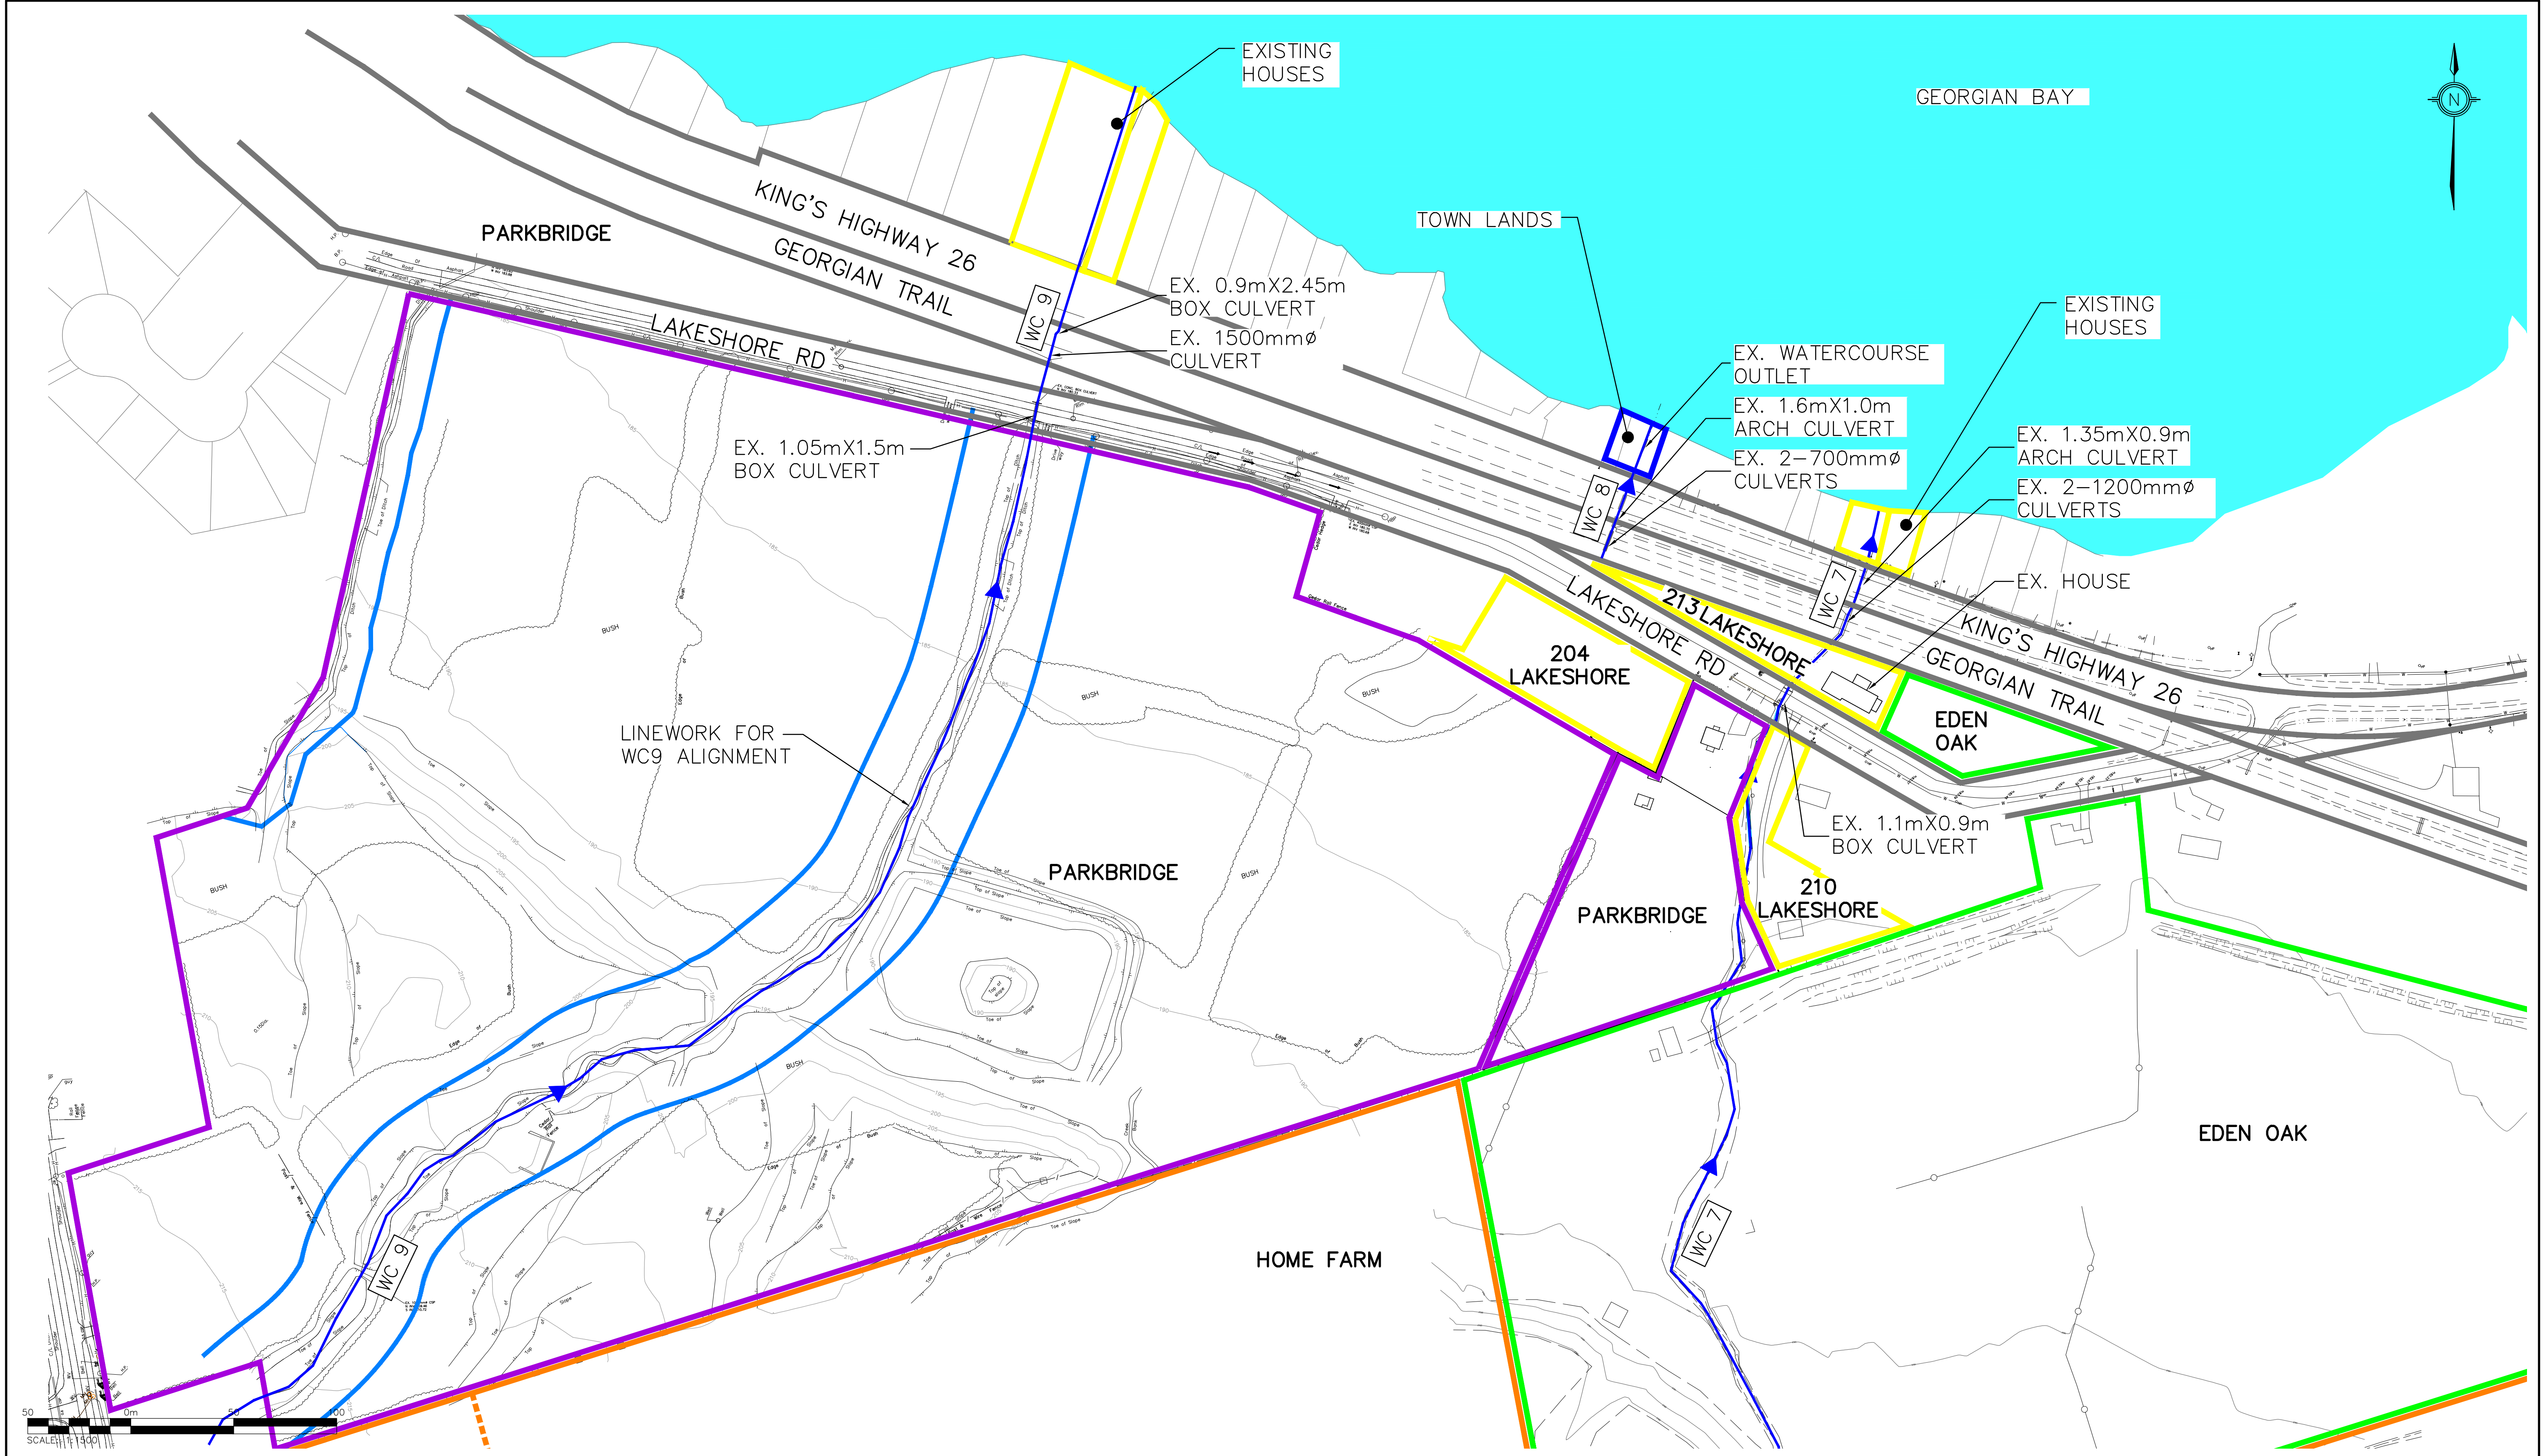

1. THIS DRAWING IS THE EXCLUSIVE PROPERTY OF C.F. CROZIER & ASSOCIATES INC. AND THE REPRODUCTION OF ANY PART WITHOUT PRIOR WRITTEN CONSENT OF THIS OFFICE IS STRICTLY PROHIBITED.

2. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, LEVELS, AND DATUMS ON SITE AND REPORT ANY DISCREPANCIES OR OMISSIONS TO THIS OFFICE PRIOR TO CONSTRUCTION.

3. THIS DRAWING IS TO BE READ AND UNDERSTOOD IN CONJUNCTION WITH ALL OTHER PLANS AND DOCUMENTS APPLICABLE TO THIS PROJECT.

4. DO NOT SCALE THE DRAWINGS.

5. ALL EXISTING UNDERGROUND UTILITIES TO BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO CONSTRUCTION.

TEMPORARY BENCHMARKS	
TBM#1-	
TBM#2-	
TBM#3-	

No.	ISSUE / REVISION	DATE: MM/DD/YYYY
0	ISSUED FOR CLIENT REVIEW	03/29/2016


No.	ISSUE / REVISION	DATE: MM/DD/YYYY
0	ISSUED FOR CLIENT REVIEW	03/29/2016

FOR DISCUSSION


NOT TO BE USED FOR CONSTRUCTION


CRAIGLEITH REGIONAL SWM PLAN
TOWN OF THE BLUE MOUNTAINS


WATERCOURSE 7, 8 & 9
EXISTING OUTLET INFRASTRUCTURE


**CROZIER & ASSOCIATES**
Consulting Engineers


Drawn By	B.K.	Design By	B.D./B.R.C.H.	Project	1046-4031
Check By	B.D.	Check By	B.R.C.H.	Scale	1:1500
				Drawing	FIGURE 3

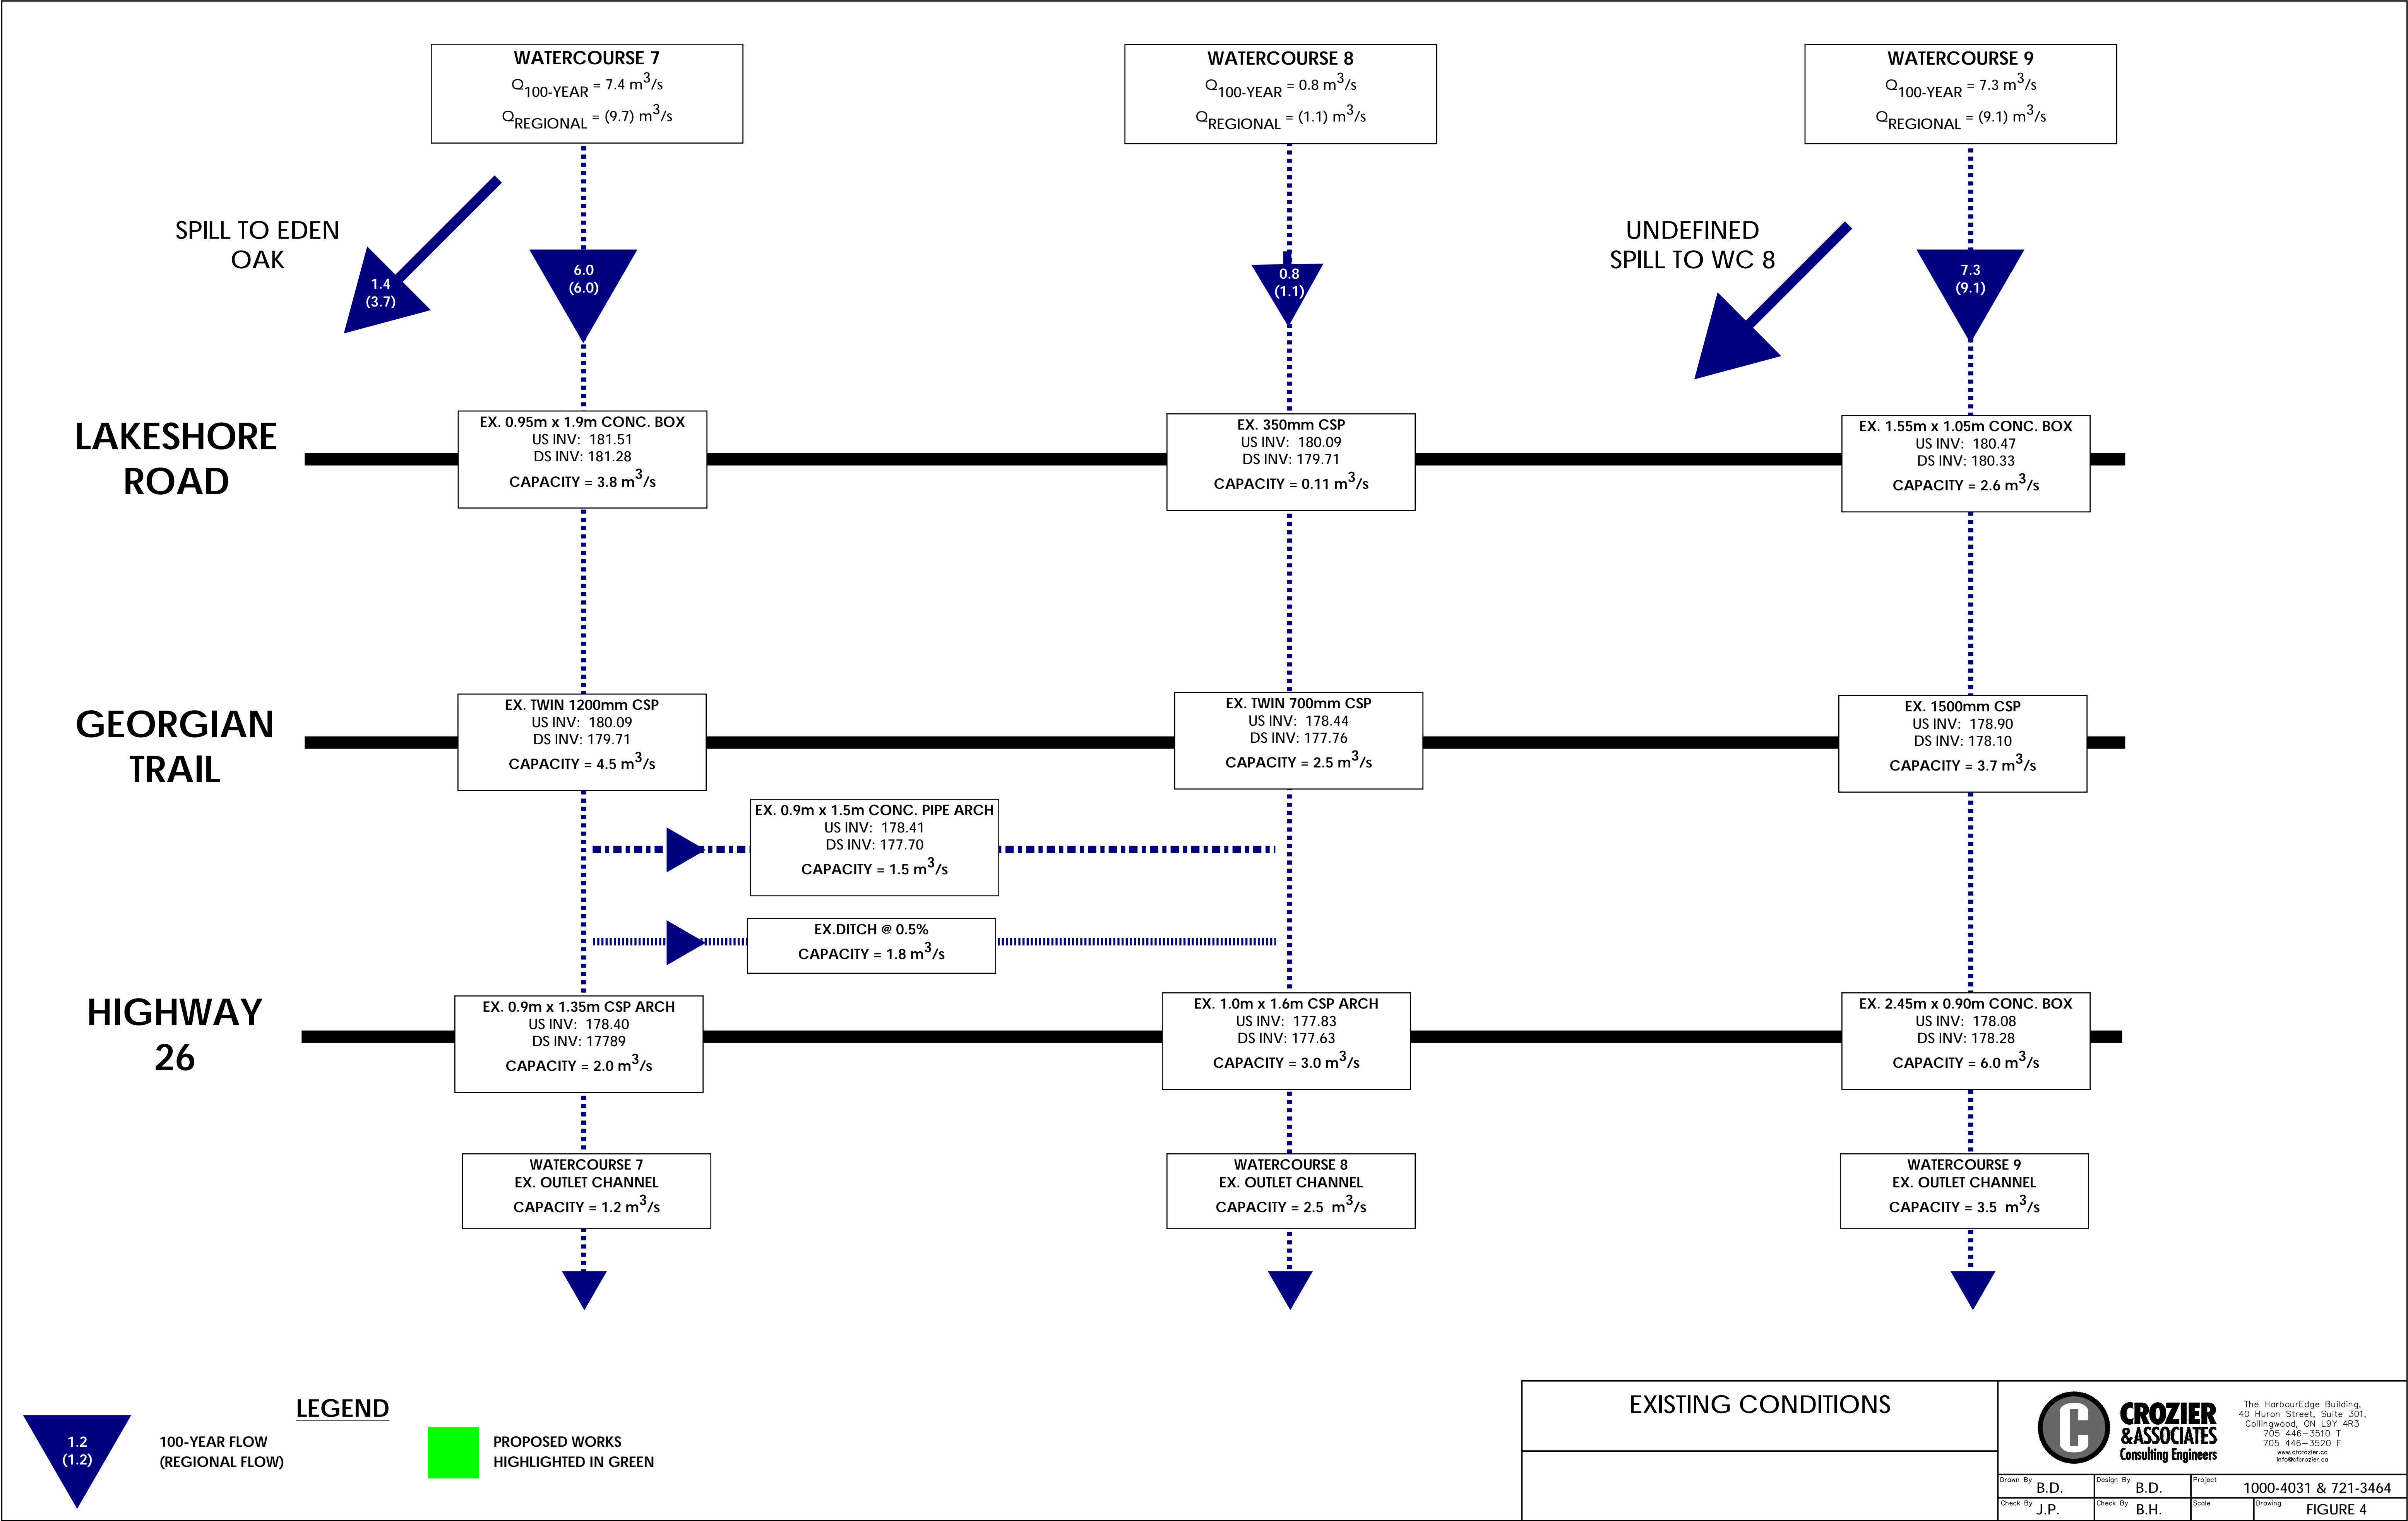

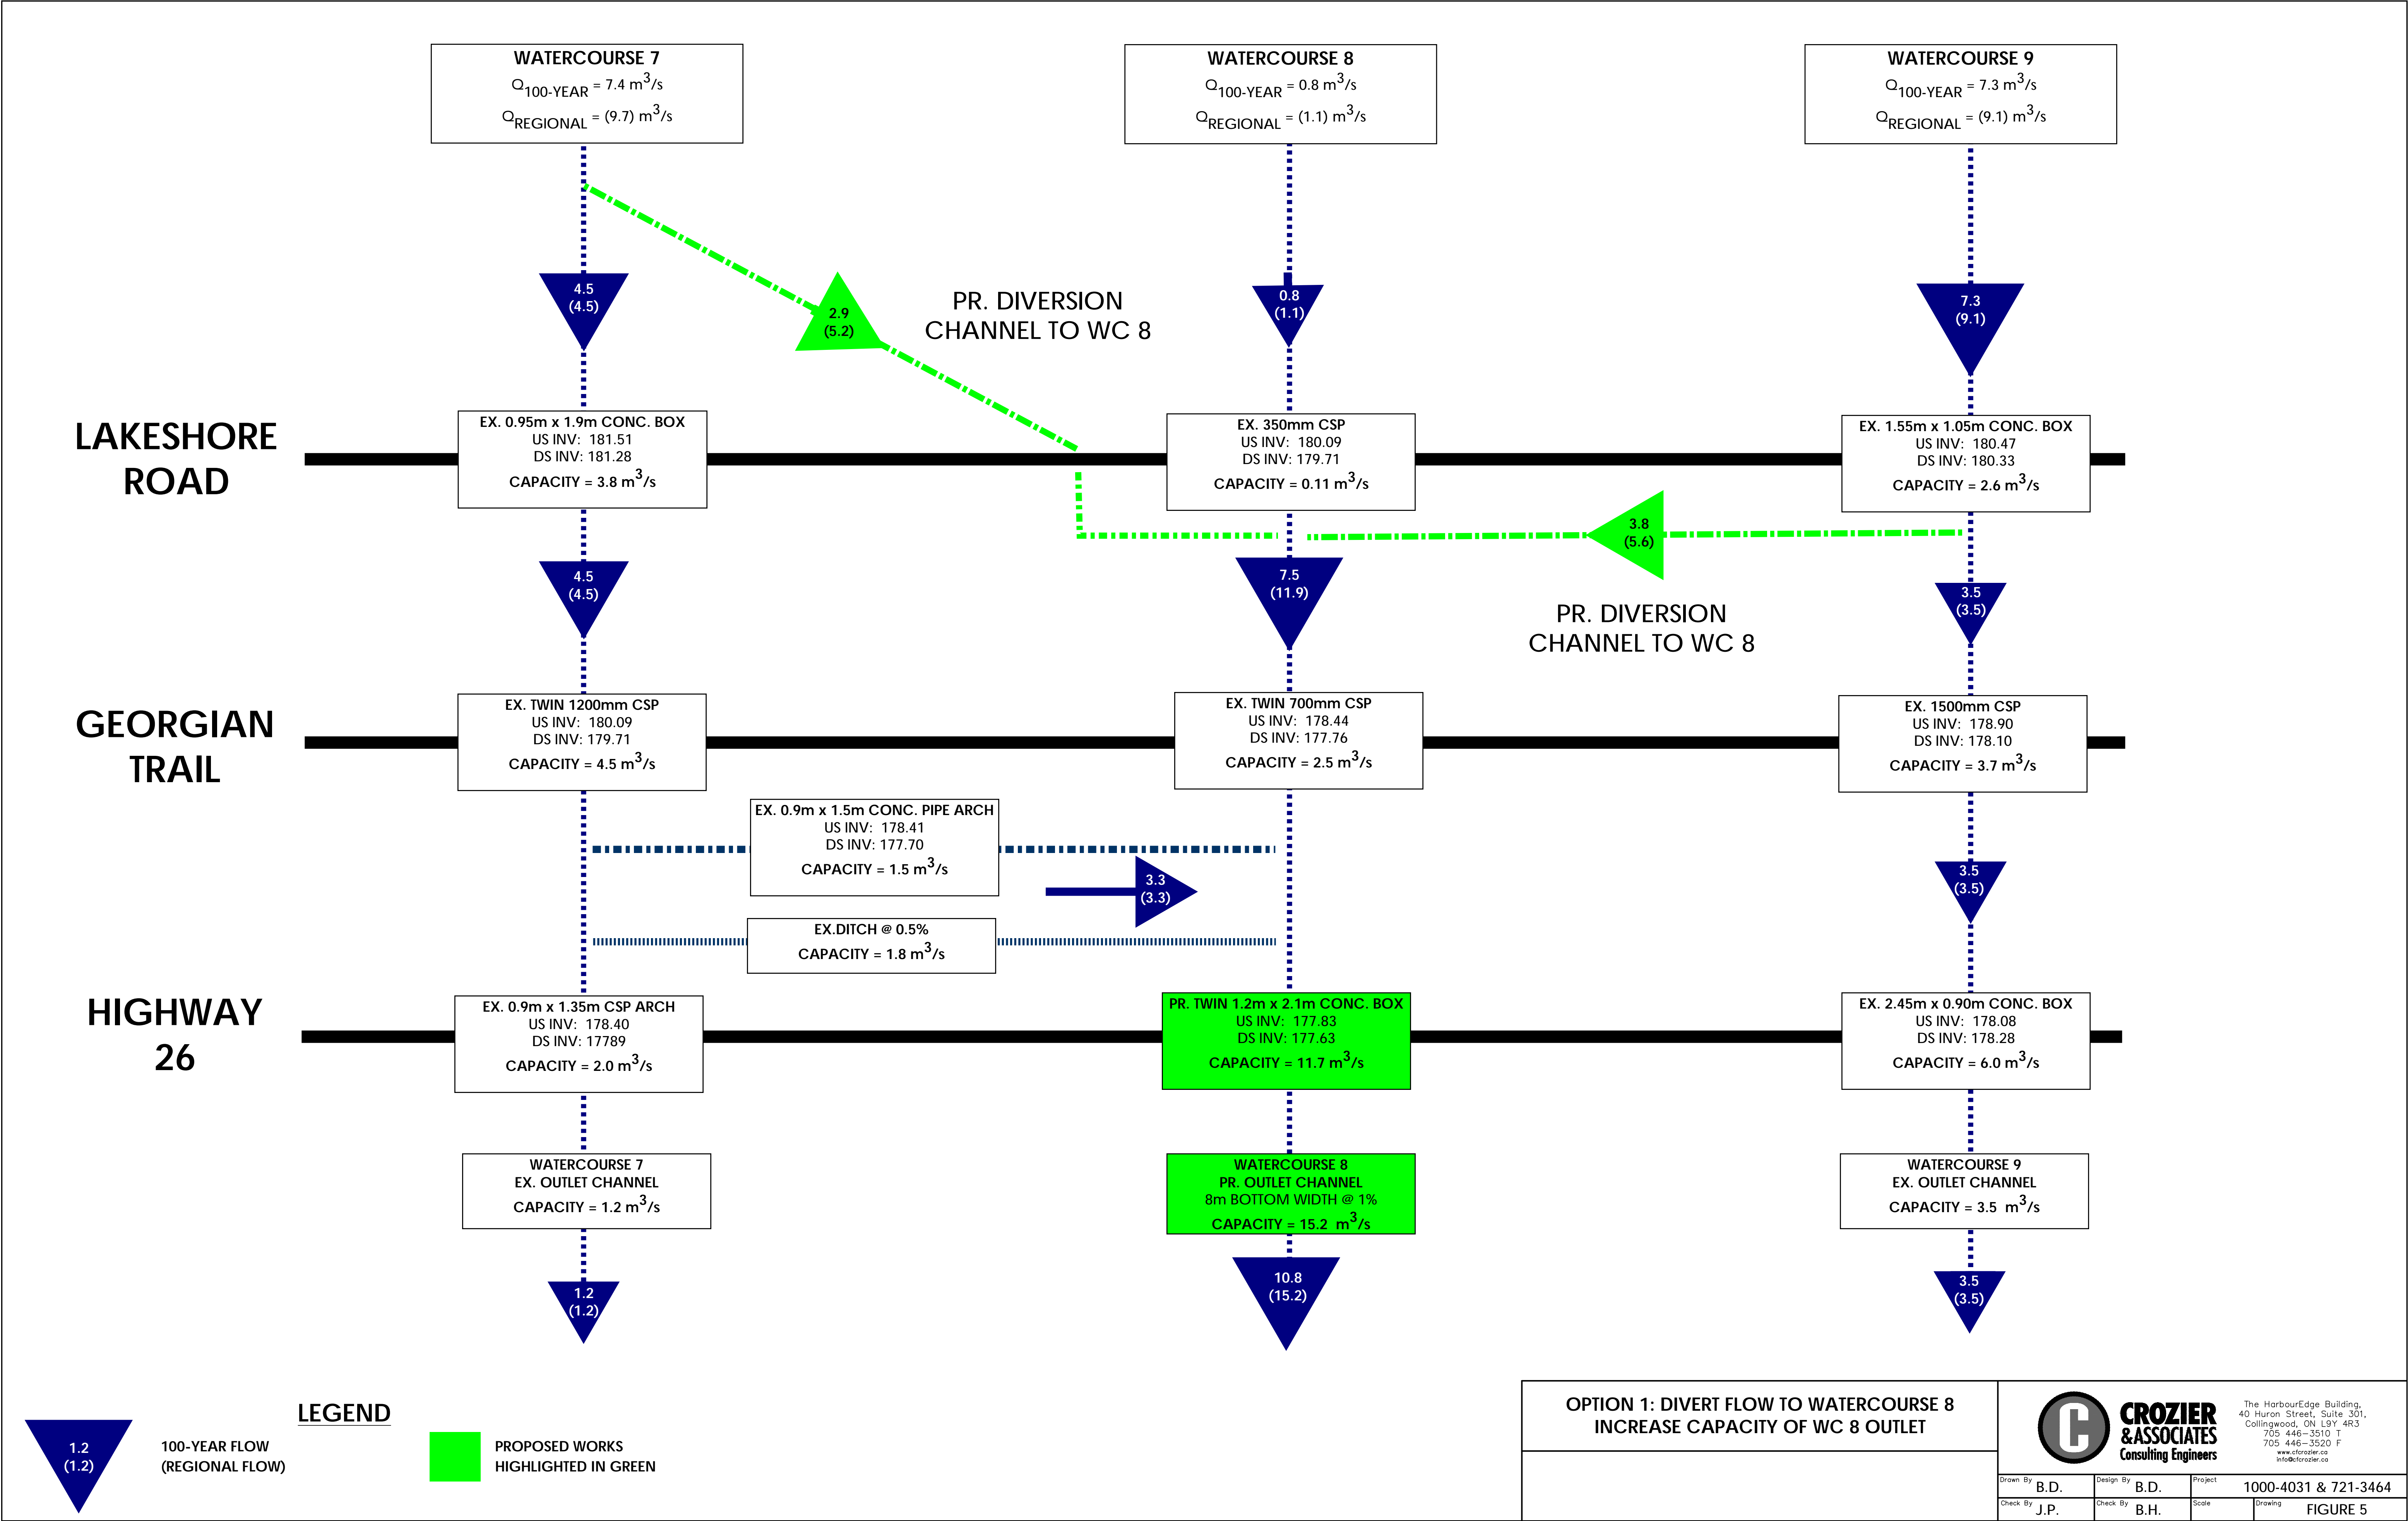

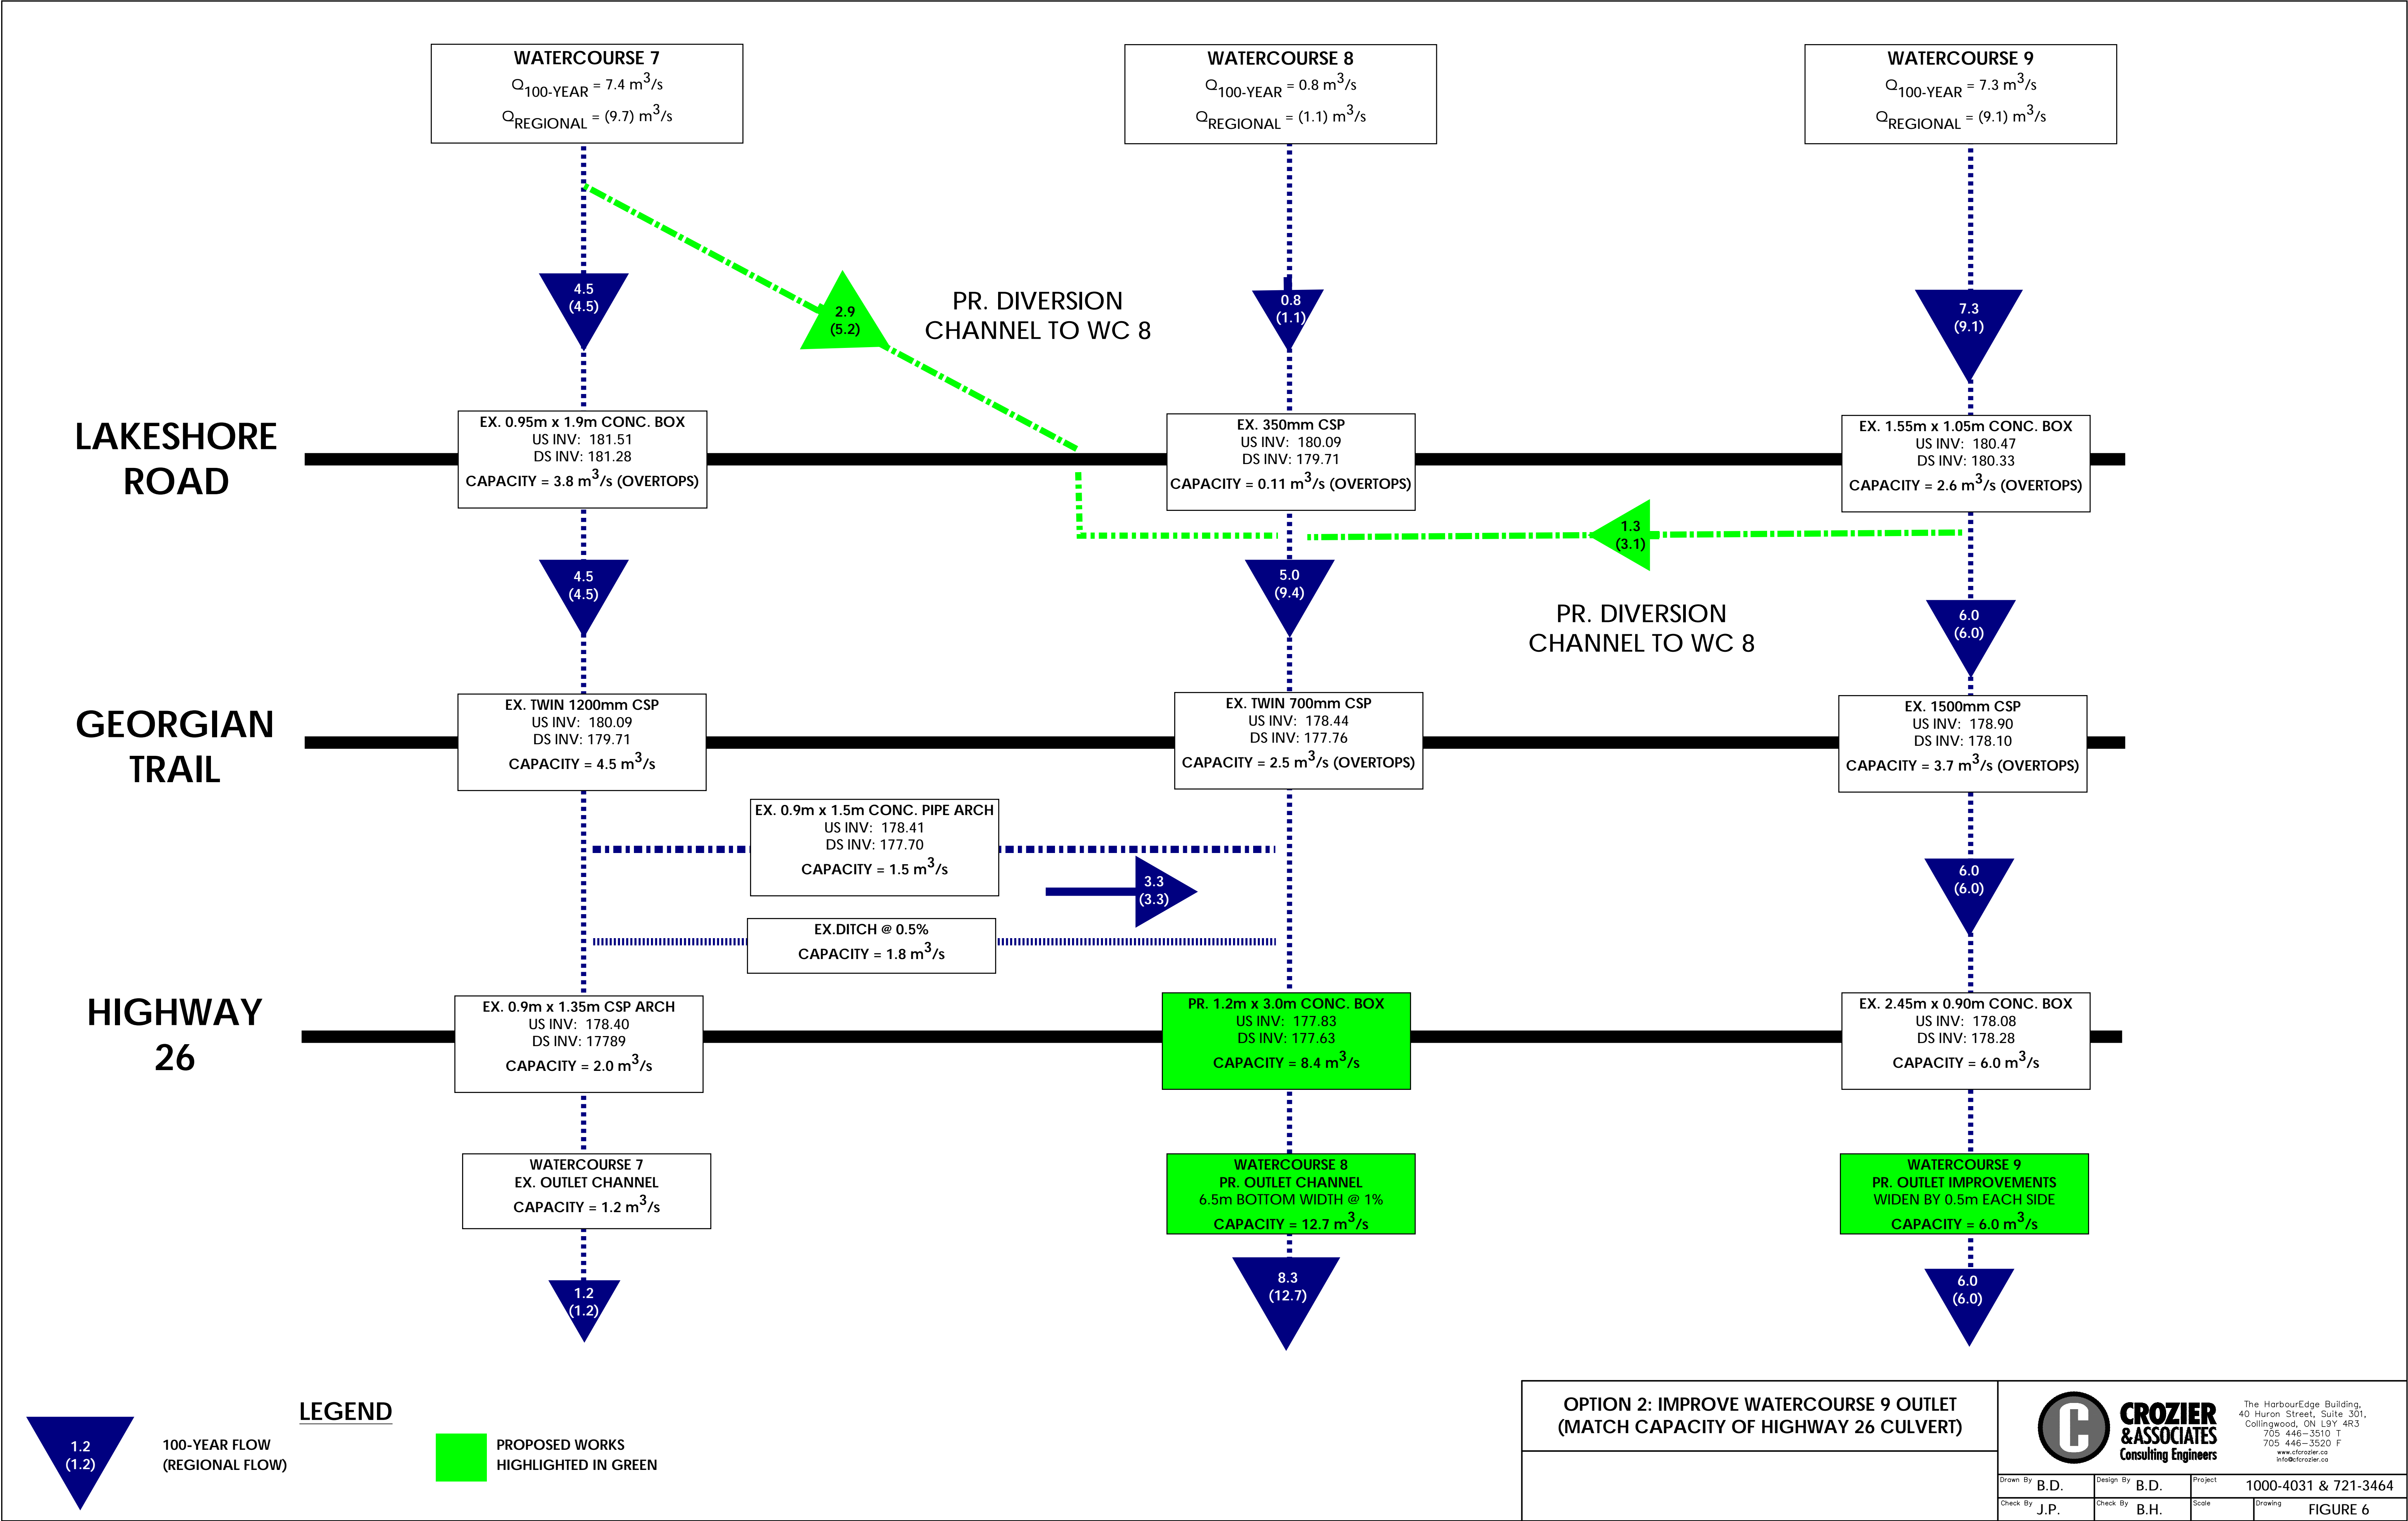

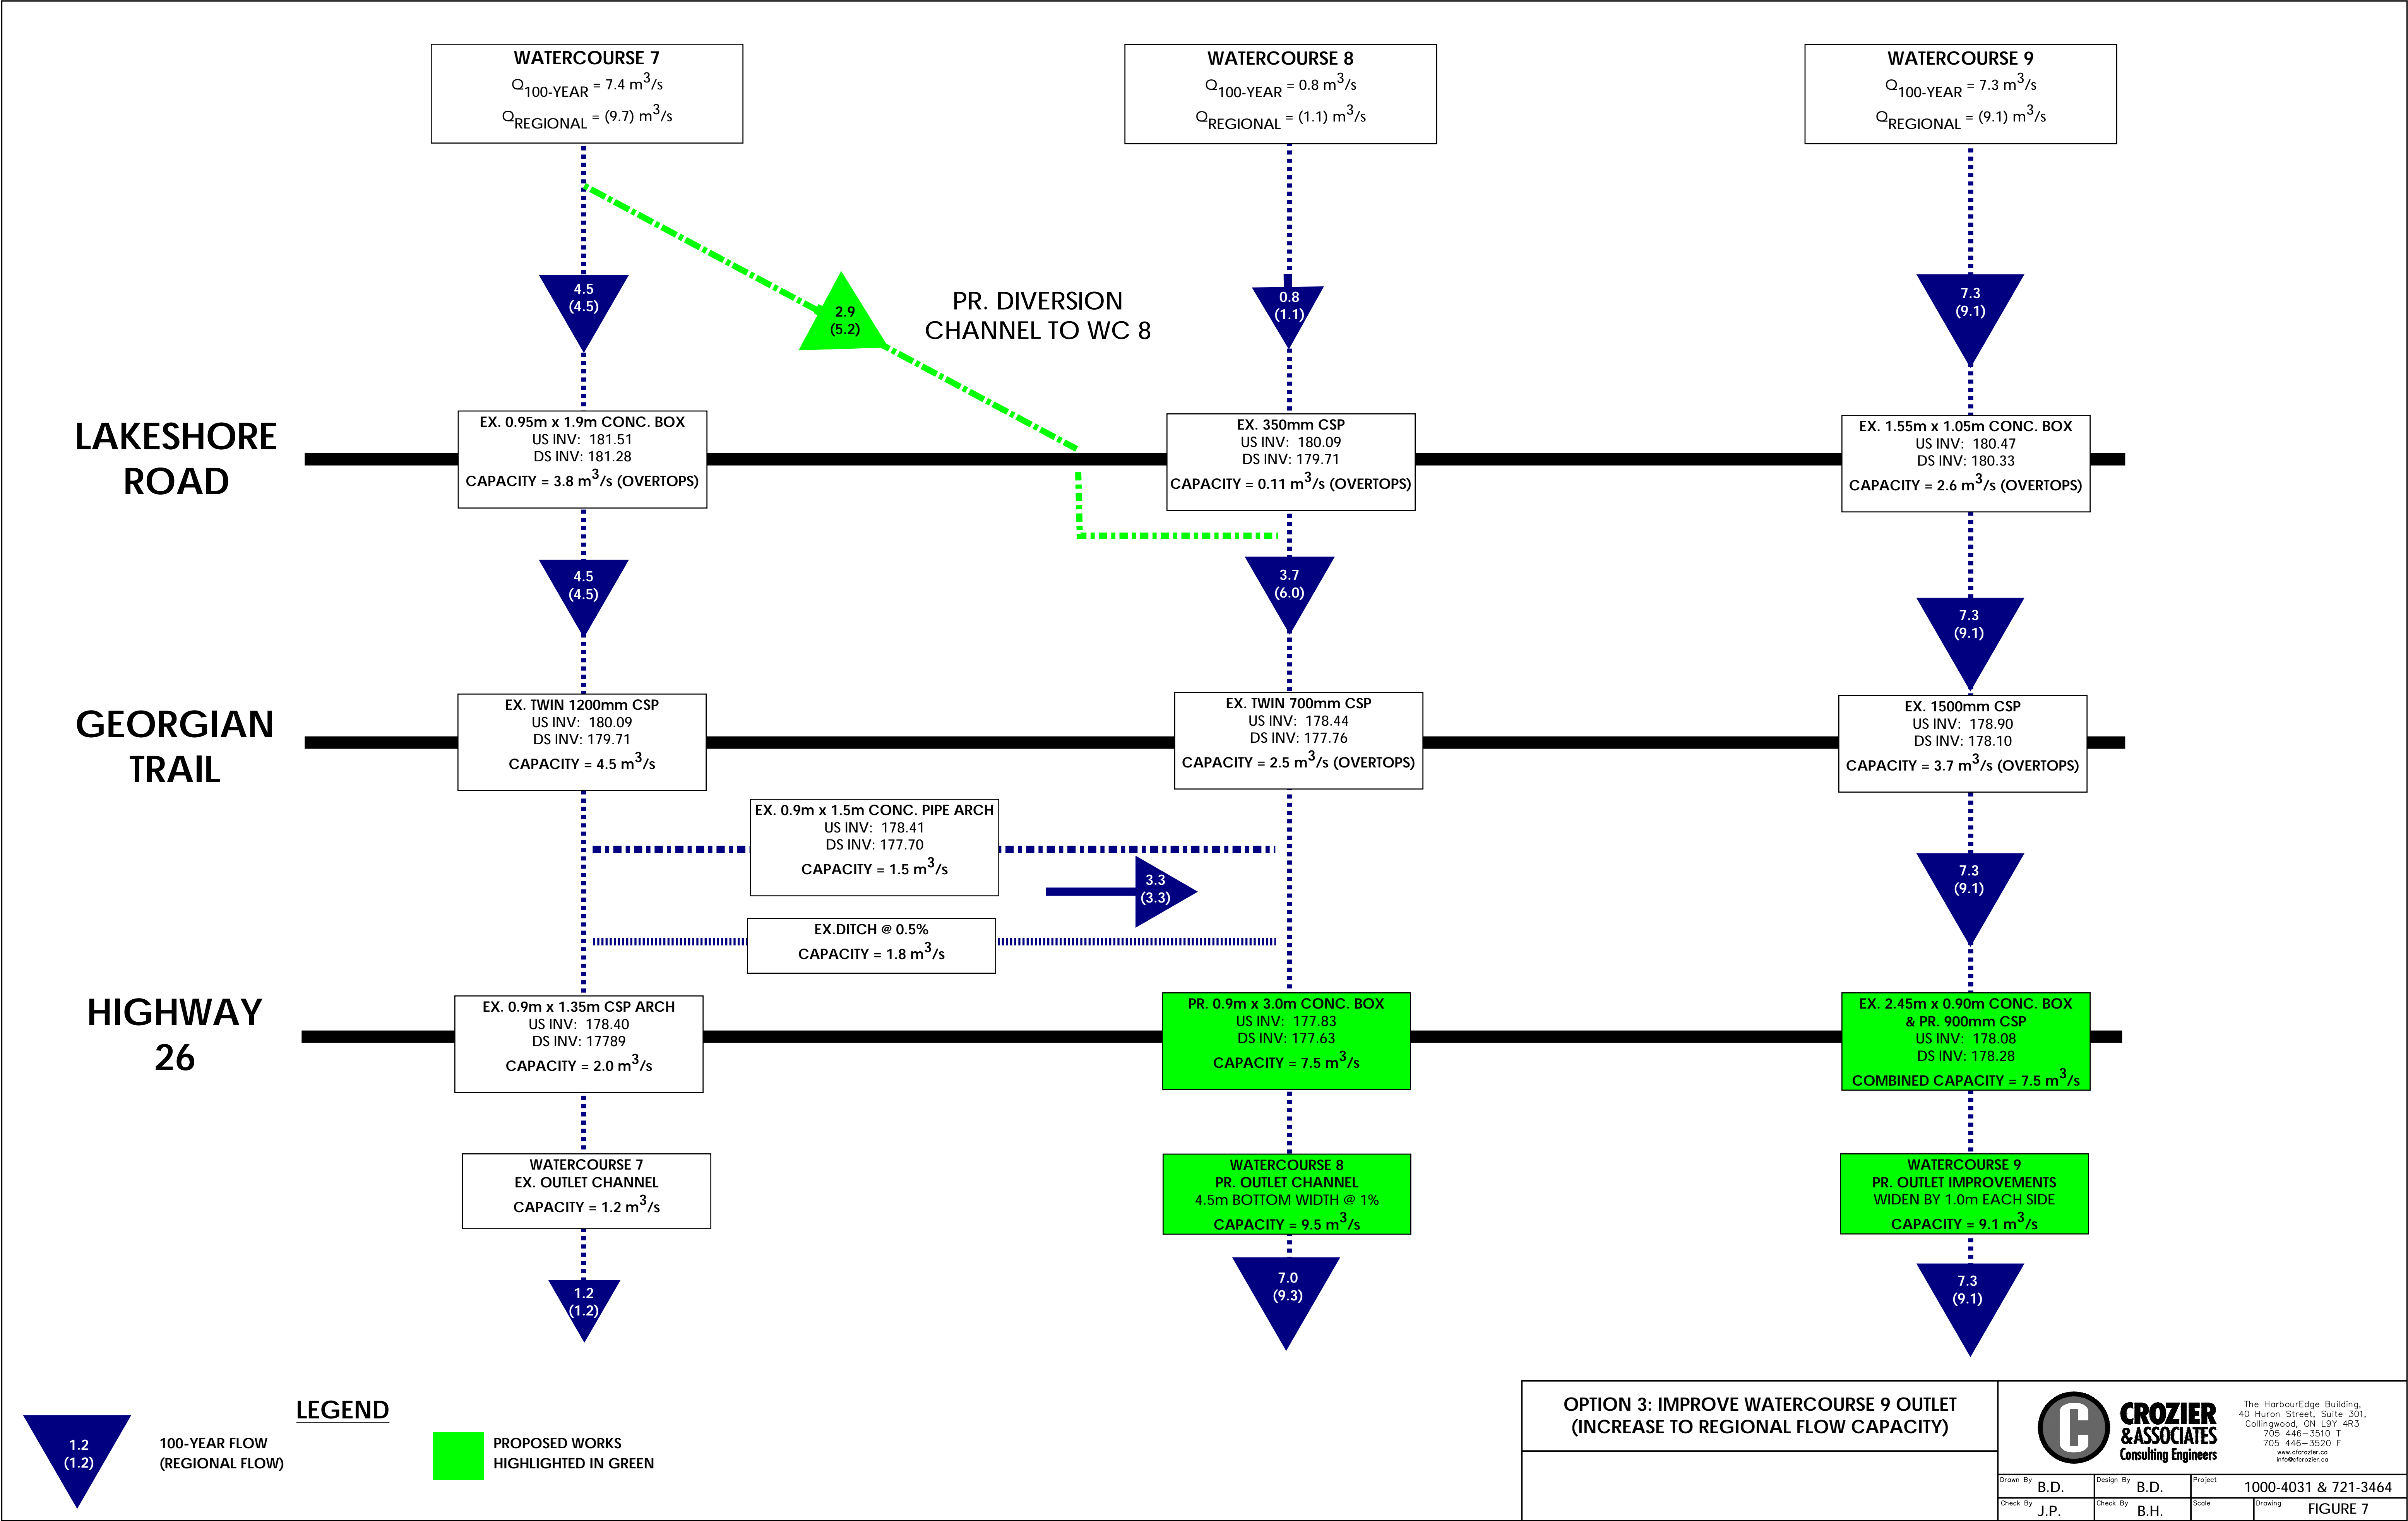

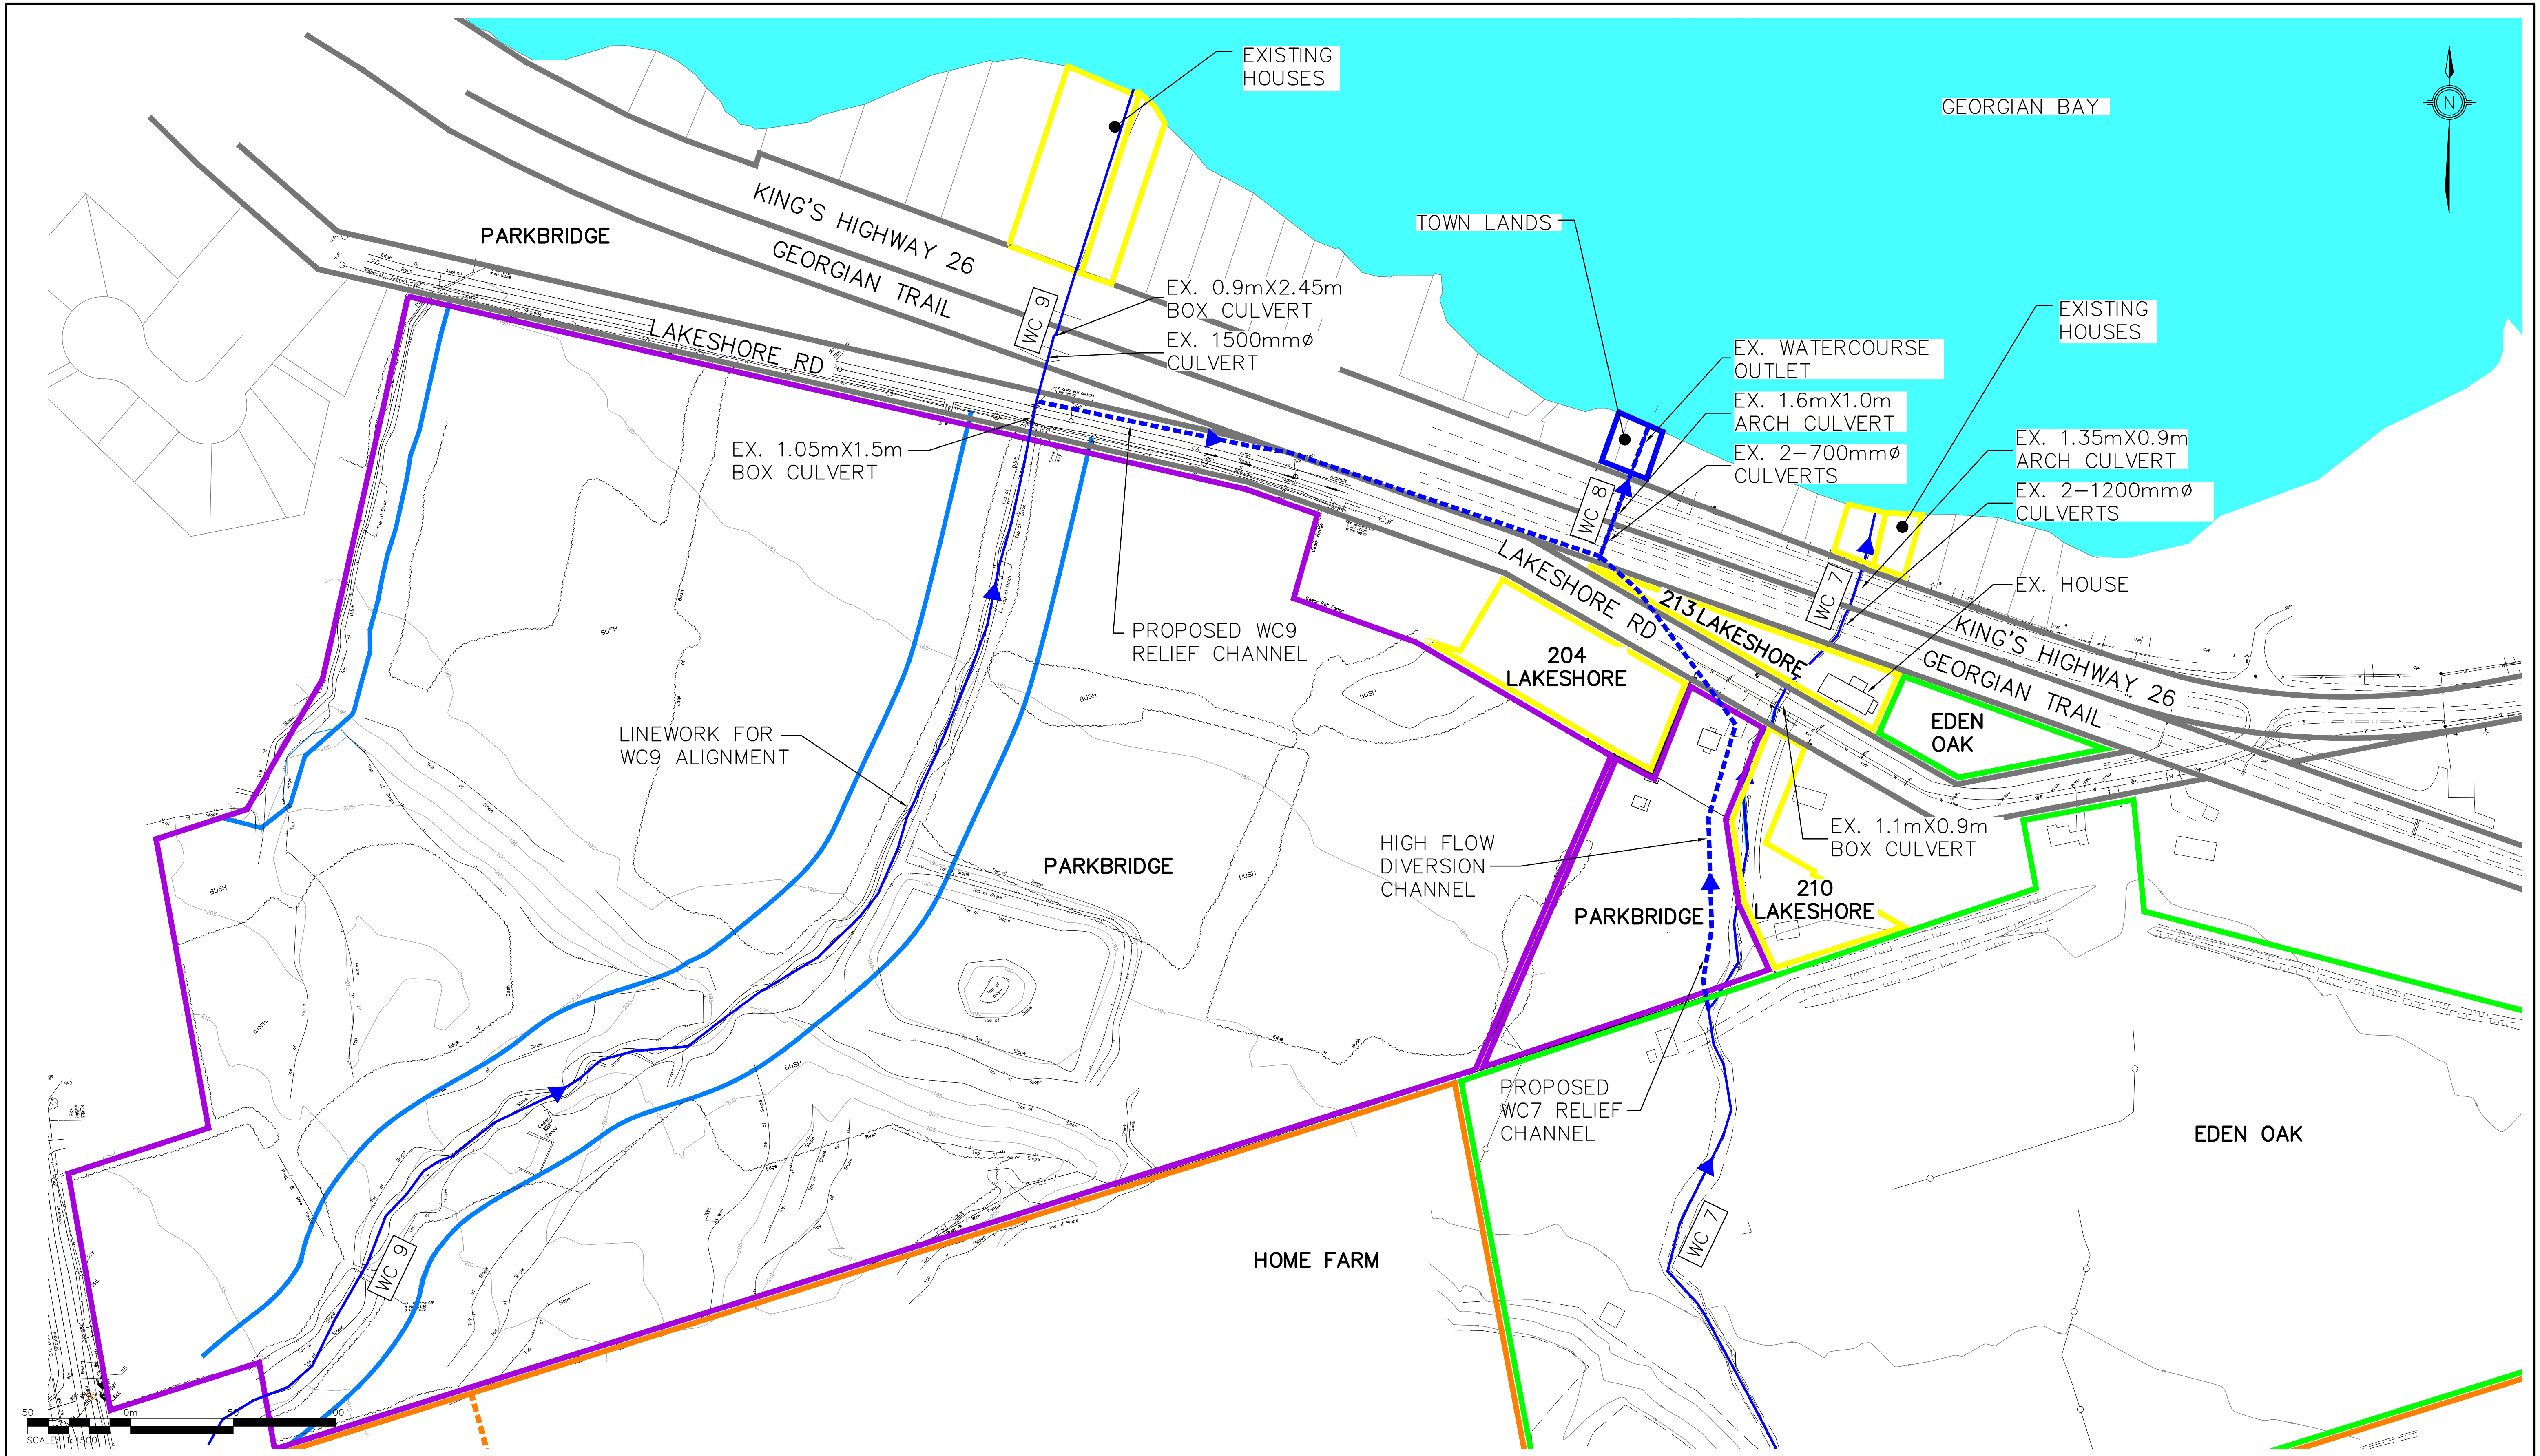

1. THIS DRAWING IS THE EXCLUSIVE PROPERTY OF C.F. CROZIER & ASSOCIATES INC. AND THE REPRODUCTION OF ANY PART WITHOUT PRIOR WRITTEN CONSENT OF THIS OFFICE IS STRICTLY PROHIBITED.

2. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, LEVELS, AND DATUMS ON SITE AND REPORT ANY DISCREPANCIES OR OMISSIONS TO THIS OFFICE PRIOR TO CONSTRUCTION.

3. THIS DRAWING IS TO BE READ AND UNDERSTOOD IN CONJUNCTION WITH ALL OTHER PLANS AND DOCUMENTS APPLICABLE TO THIS PROJECT.

4. DO NOT SCALE THE DRAWINGS.

5. ALL EXISTING UNDERGROUND UTILITIES TO BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO CONSTRUCTION.

TEMPORARY BENCHMARKS	
TBM#1-	
TBM#2-	
TBM#3-	

No.	ISSUE / REVISION	DATE: MM/DD/YYYY
0	ISSUED FOR CLIENT REVIEW	03/29/2016

No.	ISSUE / REVISION	DATE: MM/DD/YYYY
0	ISSUED FOR CLIENT REVIEW	03/29/2016

FOR DISCUSSION

NOT TO BE USED FOR CONSTRUCTION

CRAIGLEITH REGIONAL SWM PLAN
TOWN OF THE BLUE MOUNTAINS

CONCEPTUAL WC7 & WC9
FLOOD RELIEF CHANNEL PLAN

CROZIER & ASSOCIATES
Consulting Engineers

Drawn By	B.K.	Design By	B.D./B.R.C.H.	Project	1046-4031
Check By	B.D.	Check By	B.R.C.H.	Scale	1:1500
				Drawing	FIGURE 8

APPENDIX C

**Craigleith Residential Development – Regional Spill Management
Letter – February 8, 2019, C.F. Crozier & Associates Inc.**



FEBRUARY 8, 2019
SENT VIA: EMAIL
PROJECT NUMBER: 1046-4031

Brian Worsley, P.Eng.
Manager, Development Engineering
Town of the Blue Mountains
32 Mill Street
PO Box 310
Thornbury, ON
N0H 2P0

**RE: CRAIGLEITH RESIDENTIAL DEVELOPMENT
TOWN OF THE BLUE MOUNTAINS
REGIONAL SPILL MANAGEMENT LETTER**

Dear Brian,

Further to our draft submission of the Regional Stormwater Management Plan dated April 2018 and subsequent conversations with yourself we have prepared this letter to provide additional information regarding the flooding characteristics of Watercourses 7, 8, 9 and 10 in the Craigleith area.

BACKGROUND

As you are aware, C.F. Crozier & Associates Inc. (Crozier) had been retained by Parkbridge Lifestyle Communities Inc. (Parkbridge) and MacPherson Builders Ltd. (MacPherson) to complete a Regional Stormwater Management Plan to support the development applications for their respective developments in the Craigleith area. The preparation of this report was requested by The Town of the Blue Mountains (TOBM) due to historical flooding of Watercourses 7, 8, 9 and 10. This Regional Stormwater Management Plan documents the existing flooding conditions of the aforementioned watercourses and analyzes and recommends possible flood mitigation options.

A draft copy of the *Regional Stormwater Management Plan – Watercourse 7, 8, 9 and 10 (Crozier, April 2018)* was provided previously for your review. This report determined that spill flows exist between Watercourses 7 and 8 as well as Watercourses 9 and 8. This existing spill flow effectively causes the backwater of these watercourses to act in unity during high return period storms. The report analyzed various flood mitigation options, and recommended infrastructure improvements that would maintain existing spill flow patterns and increase the conveyance capacity of Watercourse 8.

PURPOSE

Subsequent to your review of the Regional Stormwater Management Plan, you raised the question as to whether the proposed spill flow conveyance improvements could be considered watershed diversion and as such require a Schedule C Environmental Assessment.

Our office is of the opinion that Schedule A activities more accurately describe the proposed works. Schedule A projects are pre-approved and may proceed to implementation without the need for a full Class EA planning process. They are limited in scale, and have minimal adverse environmental effects. As the underlying issue in this study area is undersized conveyance infrastructure, the Regional Stormwater Management Plan effectively recommends a solution similar in scope and description to the following pre-approved Schedule A project: "Culvert repair and replacement where the capacity of the culvert is not increased beyond the minimum municipal standard or the capacity required to adequately drain the area, whichever is greater, and where there is no change in drainage area."

This letter has been prepared to further assess the existing spill flow characteristics between Watercourses 7, 8, 9 and 10. Additional survey of the area has been completed to better determine existing spill flow characteristics in support of this analysis. This subsequent assessment includes additional description of spill flow routes between these watercourses, as well as analysis to determine approximate natural floodplain storage upstream of each watercourse crossing.

EXISTING CONDITIONS

As discussed in the Regional Stormwater Management Report, Watercourses 7, 8, 9 and 10 and their associated watersheds are primarily characterized by the Niagara Escarpment, Nipissing Ridge, and relatively flat lands between the Nipissing Ridge and Georgian Bay. Downstream of the Ridge, all four watercourses lack valley features and exhibit varying levels of channel definition and historic channel alteration. Due to these channel characteristics, all four watercourses often experience flows exceeding the channel capacity which spill into the adjacent watershed / lands, and ultimately towards Georgian Bay.

Watercourses 7, 9 and 10 have been the subject of multiple studies, including investigation of culvert capacity and recommendations for improvement. Watercourse 8 has not been the subject of considerable formalized study due to the poorly defined channel and lack of valley feature, as well as the relatively small catchment area of 8 ha.

Watercourse 7:

As stated in the Regional SWM Report, Watercourse 7 conveys 7.4m³/s and 9.7m³/s in the 100-year and Regional storms respectively. Upstream of Lakeshore Road, flows exceeding 6.0m³/s will spill east through the Eden Oak Development to Watercourse 6 in existing conditions. Based on the hydrologic modeling of Watercourse 7, approximately 84,750m³ and 189,800m³ of water reaches Lakeshore Road in the 100-year and Regional storms respectively.

The existing Watercourse 7 crossings at Lakeshore Road, the Georgian Trail, and Highway 26 do not have capacity to convey the 6.0m³/s conveyed in Watercourse 7. Furthermore, due to the local topography of Watercourse 7, no well-defined low point exists to convey flows exceeding the culvert capacities of any of the crossings.

Based on additional survey data and subsequent review, the following flow paths were determined for Watercourse 7:

Watercourse 7 at Lakeshore Road: Flows exceeding the Lakeshore Road culvert at Watercourse 7 will overtop Lakeshore Road. As there is no low point in the road at Watercourse 7, and the overall topography slopes west, flows that overtop Lakeshore Road will split and a portion will return to Watercourse 7 downstream of Lakeshore Road and a portion will flow west towards Watercourse 8 between Lakeshore Road and The Georgian Trail. Prior to flows overtopping Lakeshore Road approximately 60m³ of backwater storage exists upstream of Lakeshore Road.

Watercourse 7 at the Georgian Trail: Flows that reach and exceed the Georgian Trail culvert will be conveyed west along the Georgian Trail ditch to Watercourse 8 before water can overtop the Georgian Trail. Prior to flows spilling west approximately 15m³ of backwater storage exists upstream of the Georgian Trail.

Watercourse 7 at Highway 26: Flows that reach and exceed the Highway 26 culvert will be conveyed to Watercourse 8 by way of either the culvert and channel running parallel to Highway 26. Prior to flows being conveyed west approximately 70m³ of backwater storage exists upstream of Highway 26.

Considering the volume of flow that spills to Watercourse 6 and the volume of flow that passes through the Lakeshore Road culvert, there is approximately 31,800m³ and 75,250m³ surplus runoff volume in the 100-year and Regional events, respectively, that would backwater upstream of the culvert or spill via the aforementioned flow routes. The total available backwater storage of 145m³ upstream of the culverts corresponds to approximately 0.2% - 0.5% of the surplus volume that cannot pass through the culverts. As such it is clearly evident that spill flow occurs in existing conditions.

Based on these existing conditions water will spill from Watercourse 7 to 8, and there is not sufficient existing natural backwater storage to mitigate or eliminate this spill flow. Refer to Figure 1 and Figure 4 for an overview of the characteristics, spill flow and the Regional hydrograph of Watercourse 7.

Watercourse 8:

As stated in the Regional SWM Report Watercourse 8 conveys 0.8m³/s and 1.1m³/s in the 100-year and Regional storms respectively. Based on the hydrologic modeling of Watercourse 8, approximately 5,550m³ and 19,950m³ of water reaches Lakeshore Road in the 100-year and Regional storms, respectively.

The road and culvert elevations for Watercourse 8 are lower than the road and culvert elevations of Watercourses 7 or 9. As such, Watercourse 8 is located at the low point of the area.

The Watercourse 8 culvert traversing Lakeshore Road does not have capacity to convey the 100-year or Regional flow rates. Flows exceeding the culvert capacity overtop Lakeshore Road and return to Watercourse 8 downstream of Lakeshore Road. Culverts traversing the Georgian Trail and Highway 26 have capacity to convey the 100-year and Regional flows.

As such, Watercourse 8 does not spill to adjacent watercourses, but only receives spill flow from other watercourses. Refer to Figure 2 and Figure 4 for an overview of the characteristics and Regional hydrograph for Watercourse 8.

Watercourse 9:

As stated in the Regional SWM report Watercourse 9 conveys 7.3m³/s and 9.1m³/s in the 100-year and Regional storms respectively. Based on the hydrologic modeling of Watercourse 9, approximately 72,550m³ and 185,750m³ of water reaches Lakeshore Road in the 100-year and Regional storms, respectively.

As with Watercourse 7, the local topography of Watercourse 9 has no well-defined low point to convey flows exceeding the culvert capacities of any of the crossings.

Based on additional survey data and subsequent review, the following spill flow characteristics were determined for Watercourse 9:

Watercourse 9 at Lakeshore Road: Flows exceeding the capacity of the culvert discharge in three directions. A portion of flows will overtop Lakeshore Road west of Watercourse 9, and will drain back to Watercourse 9 downstream of Lakeshore Road. A portion of flows exceeding the capacity of the culvert will also spill east over the adjacent abandoned driveway at a similar elevation as flows overtopping Lakeshore Road west of the watercourse. Subsequently these flows will be conveyed east towards Watercourse 8 along the Lakeshore Road ditch. Depending on water surface elevations that spill east, a portion of flows could be conveyed over Lakeshore Road between Watercourse 8 and 9 and will either drain to Watercourse 8 or 9. Prior to flows overtopping Lakeshore Road or spilling to Watercourse 8, approximately 1320m³ of backwater storage exists upstream of Lakeshore Road.

Watercourse 9 at the Georgian Trail: Flows that reach and exceed the Georgian Trail culvert will discharge in two directions. Some flows will overtop the Georgian Trail west of Watercourse 9, and will drain back to Watercourse 9 downstream of The Georgian Trail. A portion of flows will spill to Watercourse 8 by way of the open space area between Lakeshore Road and the Georgian Trail. Prior to flows overtopping the Georgian Trail or spilling to Watercourse 8, approximately 90m³ of backwater storage exists upstream of Lakeshore Road.

Watercourse 9 at Highway 26: Flows that reach and exceed the Highway 26 culvert will be conveyed to Watercourse 8 by way of the Highway 26 ditch, before overtopping the road. Prior to flows being conveyed east approximately 50m³ of backwater storage exists upstream of the Highway 26.

Considering the volume of flow that passes through the Lakeshore Road culvert, there is approximately 28,050m³ and 86,200m³ surplus runoff volume in the 100-year and Regional events, respectively, that contribute to backwater upstream of the culvert or spill via the aforementioned flow routes. The total available backwater storage of 1460m³ upstream of the culverts corresponds to approximately 1.7% - 5.2% of the surplus volume that cannot pass through the culverts.

Based on these existing conditions water will spill from Watercourse 9 to 8, and there is not sufficient existing natural backwater storage to mitigate or eliminate this spill flow. Refer to Figure 3 and Figure 4 for an overview of the characteristics, spill flow and the Regional hydrograph of Watercourse 9.

SUMMARY

In summary, the subject watercourses exhibit the following characteristics under large storm events:

Watercourse 7:

- I. During the beginning of the rainfall event flows below $1.2\text{m}^3/\text{s}$ will be conveyed by Watercourse 7 traversing Lakeshore Road, the Georgian Trail, and Highway 26 and discharging to Georgian Bay.
- II. Once flows exceed $1.75\text{m}^3/\text{s}$ flows will exceed the Highway 26 culvert capacity. The 70m^3 of storage will be used prior to the peak flows occurring and flows will subsequently begin to spill to Watercourse 8 via the existing culvert and channel along the south side of Highway 26.
- III. Once flows exceed $2.05\text{m}^3/\text{s}$ flows will exceed the Georgian Trail culvert capacity. The 15m^3 of storage will be used prior to the peak flows occurring and subsequently additional spill flow occurs to Watercourse 8 via the Georgian Trail ditch.
- IV. Once flows exceed $2.73\text{m}^3/\text{s}$ flows will exceed the Lakeshore Road culvert capacity. The 60m^3 of storage will be used prior to the peak flows occurring and subsequently begin to overtop Lakeshore Road with a portion of this flow spilling towards Watercourse 8 via the open space between Lakeshore Road and the Georgian Trail.
- V. Once flow exceeds $6.0\text{m}^3/\text{s}$ flows will spill to Watercourse 6 through the Eden Oak Site prior to reaching the Lakeshore Road culvert.

Watercourse 8:

- I. During the beginning of the rainfall event flows below $0.18\text{m}^3/\text{s}$ will be conveyed by Watercourse 8 traversing Lakeshore Road, the Georgian Trail, and Highway 26, eventually discharging to Georgian Bay.
- II. Once flows exceed $0.18\text{m}^3/\text{s}$ flows will overtop Lakeshore Road and return to Watercourse 8.

Watercourse 9:

- I. During the beginning of the rainfall event flows below $2.63\text{m}^3/\text{s}$ will be conveyed by Watercourse 9 traversing Lakeshore Road, the Georgian Trail, and Highway 26 and discharging to Georgian Bay.
- II. Once flows exceed $2.63\text{m}^3/\text{s}$ flows will exceed the Lakeshore Road culvert capacity. The 1320m^3 of storage will be used prior to the peak flows occurring and will subsequently overtop Lakeshore Road as well as spill to Watercourse 8 via the Lakeshore Road ditch.
- III. Once flows reaching the Georgian Trail culvert exceed $2.73\text{m}^3/\text{s}$ the Georgian Trail culvert capacity will be exceeded. The 90m^3 of storage will be used prior to the peak flows occurring and flows will subsequently overtop the Georgian trail and spill to Watercourse 8 via the open space between Lakeshore Road and the Georgian Trail.
- IV. Once flows reaching the Highway 26 culvert exceed $3.50\text{m}^3/\text{s}$ the Highway 26 culvert capacity will be exceeded. The 50m^3 of storage will be used prior to the peak flows occurring and flows will subsequently spill to Watercourse 8 via the Highway 26 ditch.

CONCLUSION


Based on the information and analysis presented in this letter it is evident that existing spill flows can and do occur between Watercourses 7 and 8, and between Watercourses 9 and 8. The solution presented in the Regional Stormwater Management Report are not "new diversion channels". More appropriately, these works are upsizing existing historic and undersized drainage infrastructure to capacities required to adequately drain the area.

As such it is our opinion the proposed works suggested in our report, the *Regional Stormwater Management Plan – Watercourse 7, 8, 9 and 10 (Crozier, April 2018)* consist of Schedule A activities in accordance with the Municipal Class Environmental Assessment (MCEA) process.

We trust this information will be of assistance. Should you have any questions, please do not hesitate to contact the undersigned.

Yours truly,

C.F. CROZIER & ASSOCIATES INC.




Jon Proctor, P.Eng.
Associate

C.F. CROZIER & ASSOCIATES INC.



Brendan Hummelen, P.Eng.
Project Engineer


C.F. CROZIER & ASSOCIATES INC.




Sarah O'Neill, B.Sc. Engineering
Operations Manager


Enclosures Figure 1 – Watercourse 7
 Figure 2 – Watercourse 8
 Figure 3 – Watercourse 9
 Figure 4 – Watercourse Flow Chart



J:\1000\1046-Parkbridge Lifestyle\4031-Craigleith Fogal Land Acq\Letters\Regional Spill Mgmt Letter\2019.02.07 -
Craigleith Regional Spill Management Letter DRAFT

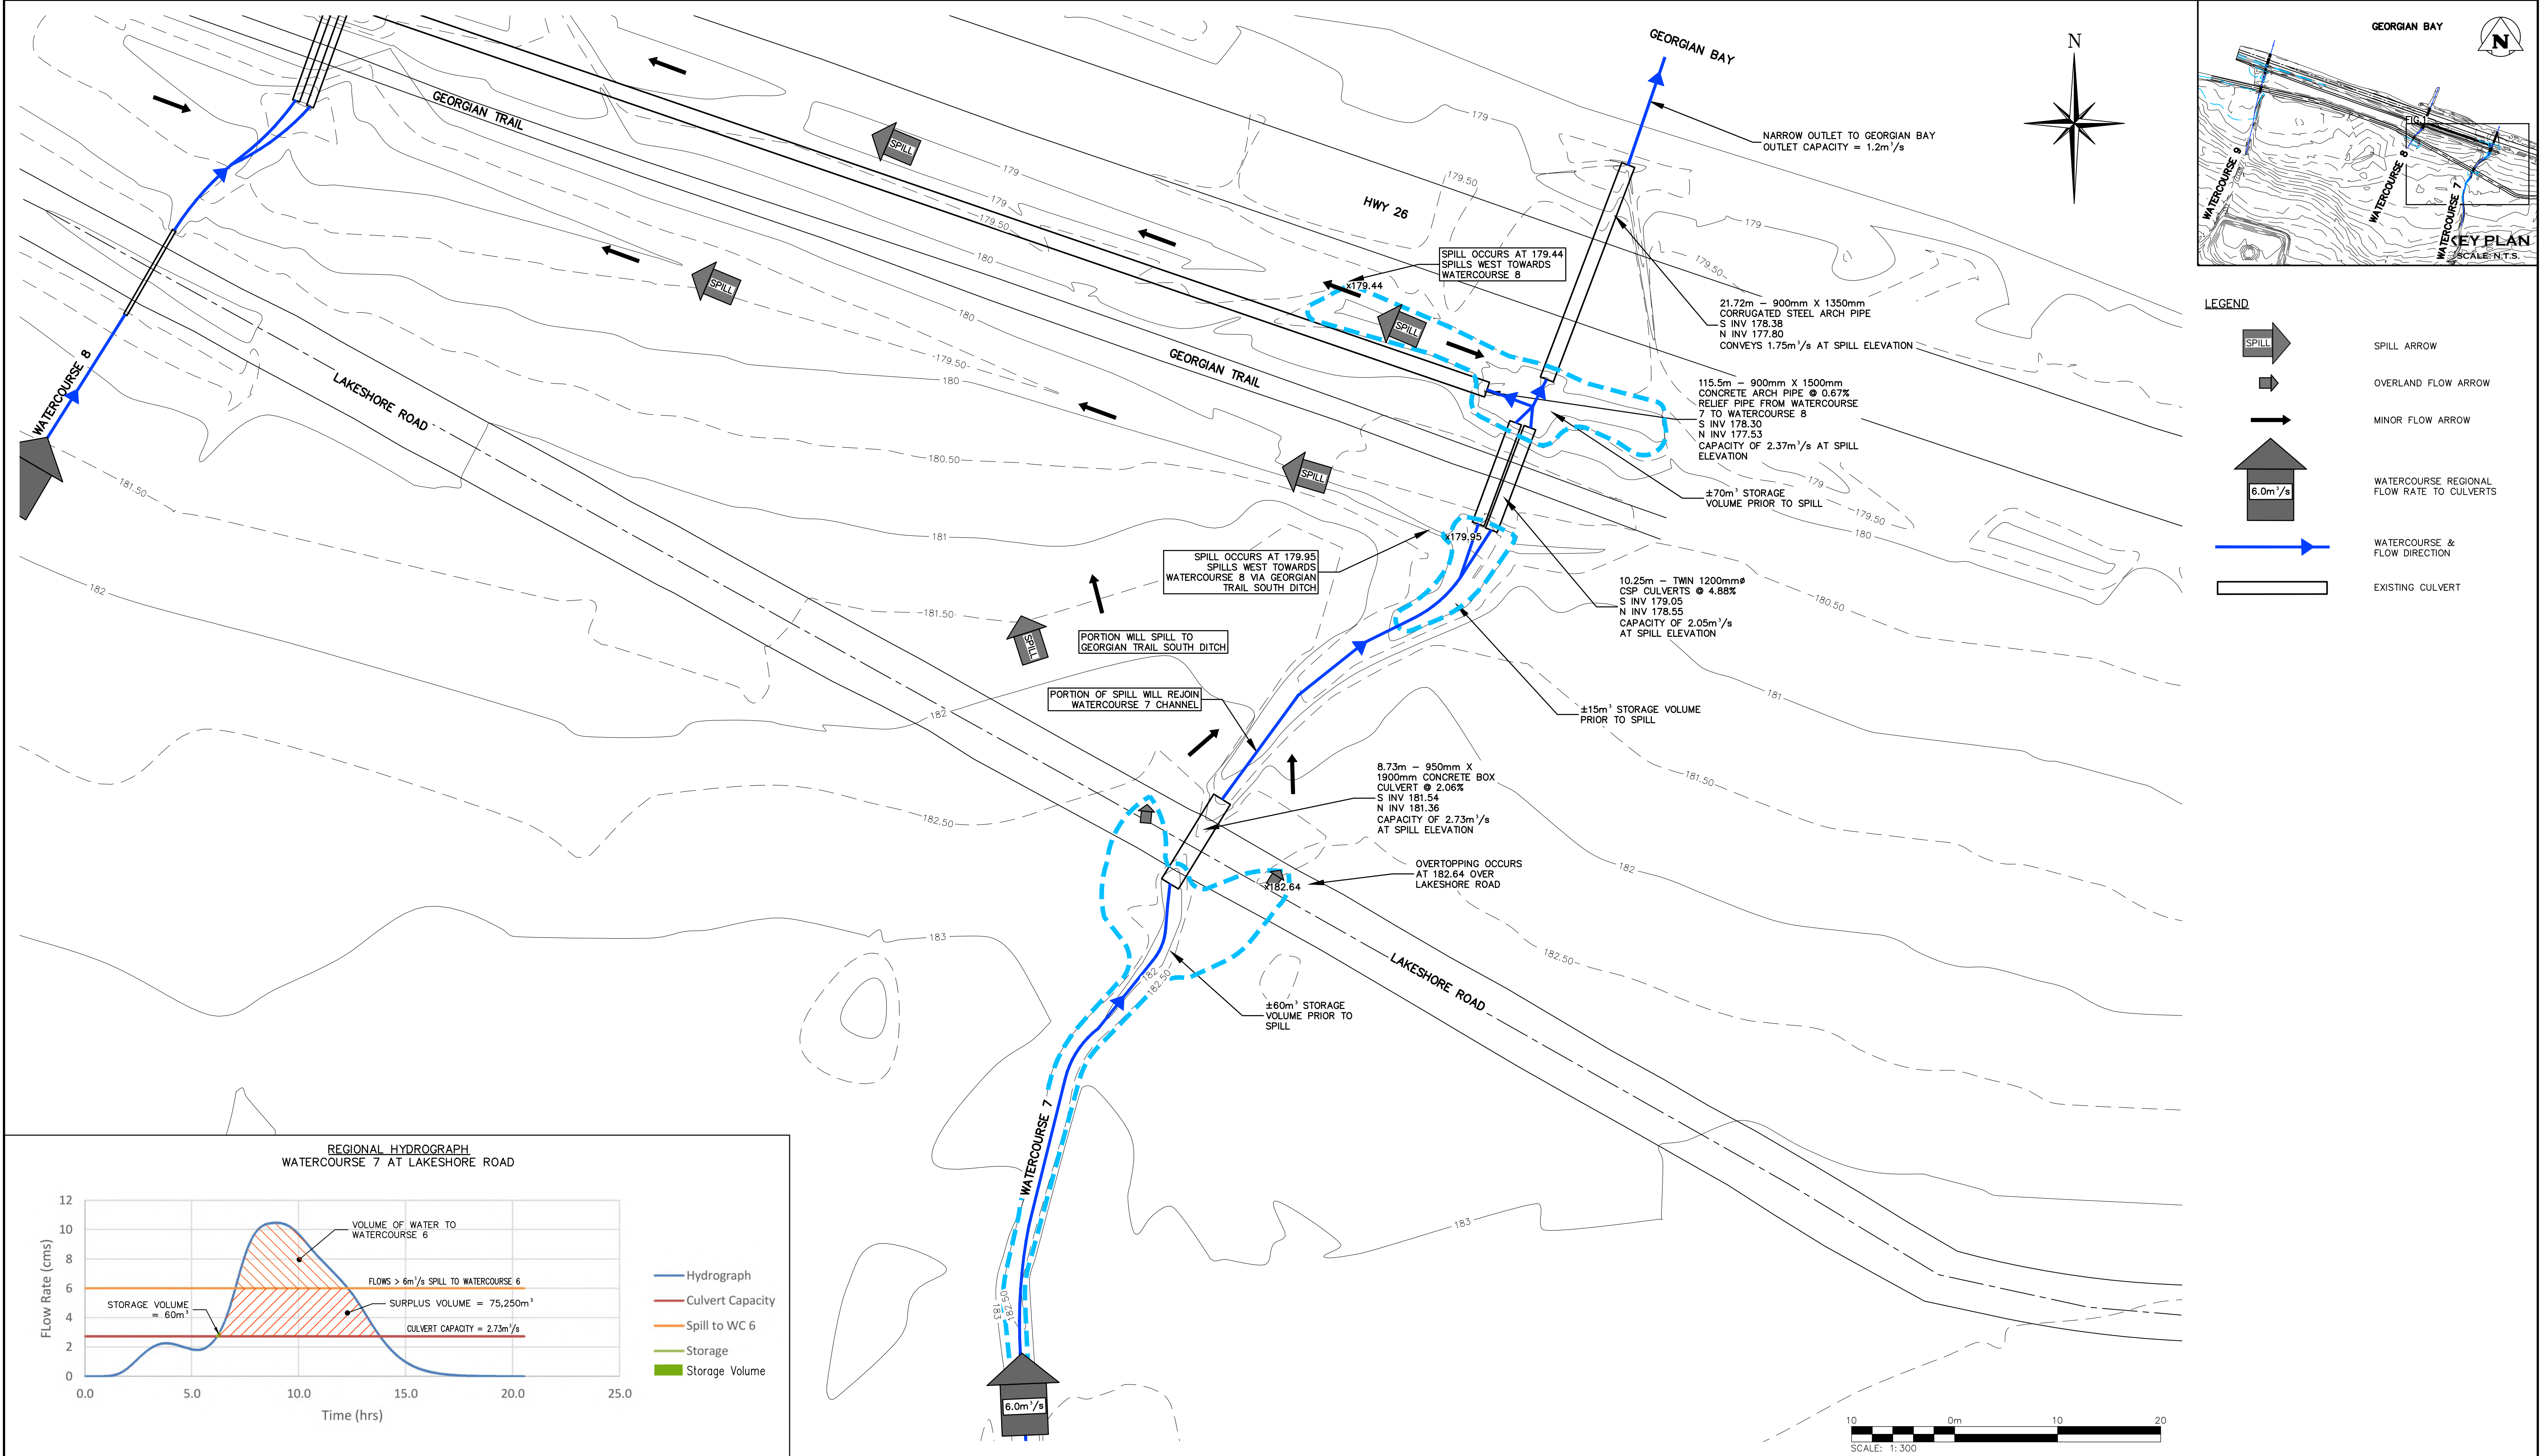

1. THIS DRAWING IS THE EXCLUSIVE PROPERTY OF C.F. CROZIER & ASSOCIATES INC. AND THE REPRODUCTION OF ANY PART WITHOUT PRIOR WRITTEN CONSENT OF THIS OFFICE IS STRICTLY PROHIBITED. 2. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS, LEVELS, AND DATUMS ON SITE AND REPORT ANY DISCREPANCIES OR OMISSIONS TO THIS OFFICE PRIOR TO CONSTRUCTION. 3. THIS DRAWING IS TO BE READ AND UNDERSTOOD IN CONJUNCTION WITH ALL OTHER PLANS AND DOCUMENTS APPLICABLE TO THIS PROJECT. 4. DO NOT SCALE THE DRAWINGS. 5. ALL EXISTING UNDERGROUND UTILITIES TO BE VERIFIED IN THE FIELD BY THE CONTRACTOR PRIOR TO CONSTRUCTION.	TEMPORARY BENCHMARKS TBM#1— TBM#2— TBM#3—	Town	No.	ISSUE	DATE: MM/DD/YYYY	Engineer	Engineer	Project	Drawing	CRAIGLEITH REGIONAL SWM ANALYSIS TOWN OF THE BLUE MOUNTAINS WATERCOURSE 7	 THE HARBOUREDGE BUILDING, 40 HURON STREET, SUITE 301, COLLINGWOOD, ON L9Y 4R3 705 446-3510 T 705 446-3520 F WWW.CFCROZIER.CA INFO@CFCROZIER.CA	1046-4031 FIG 1

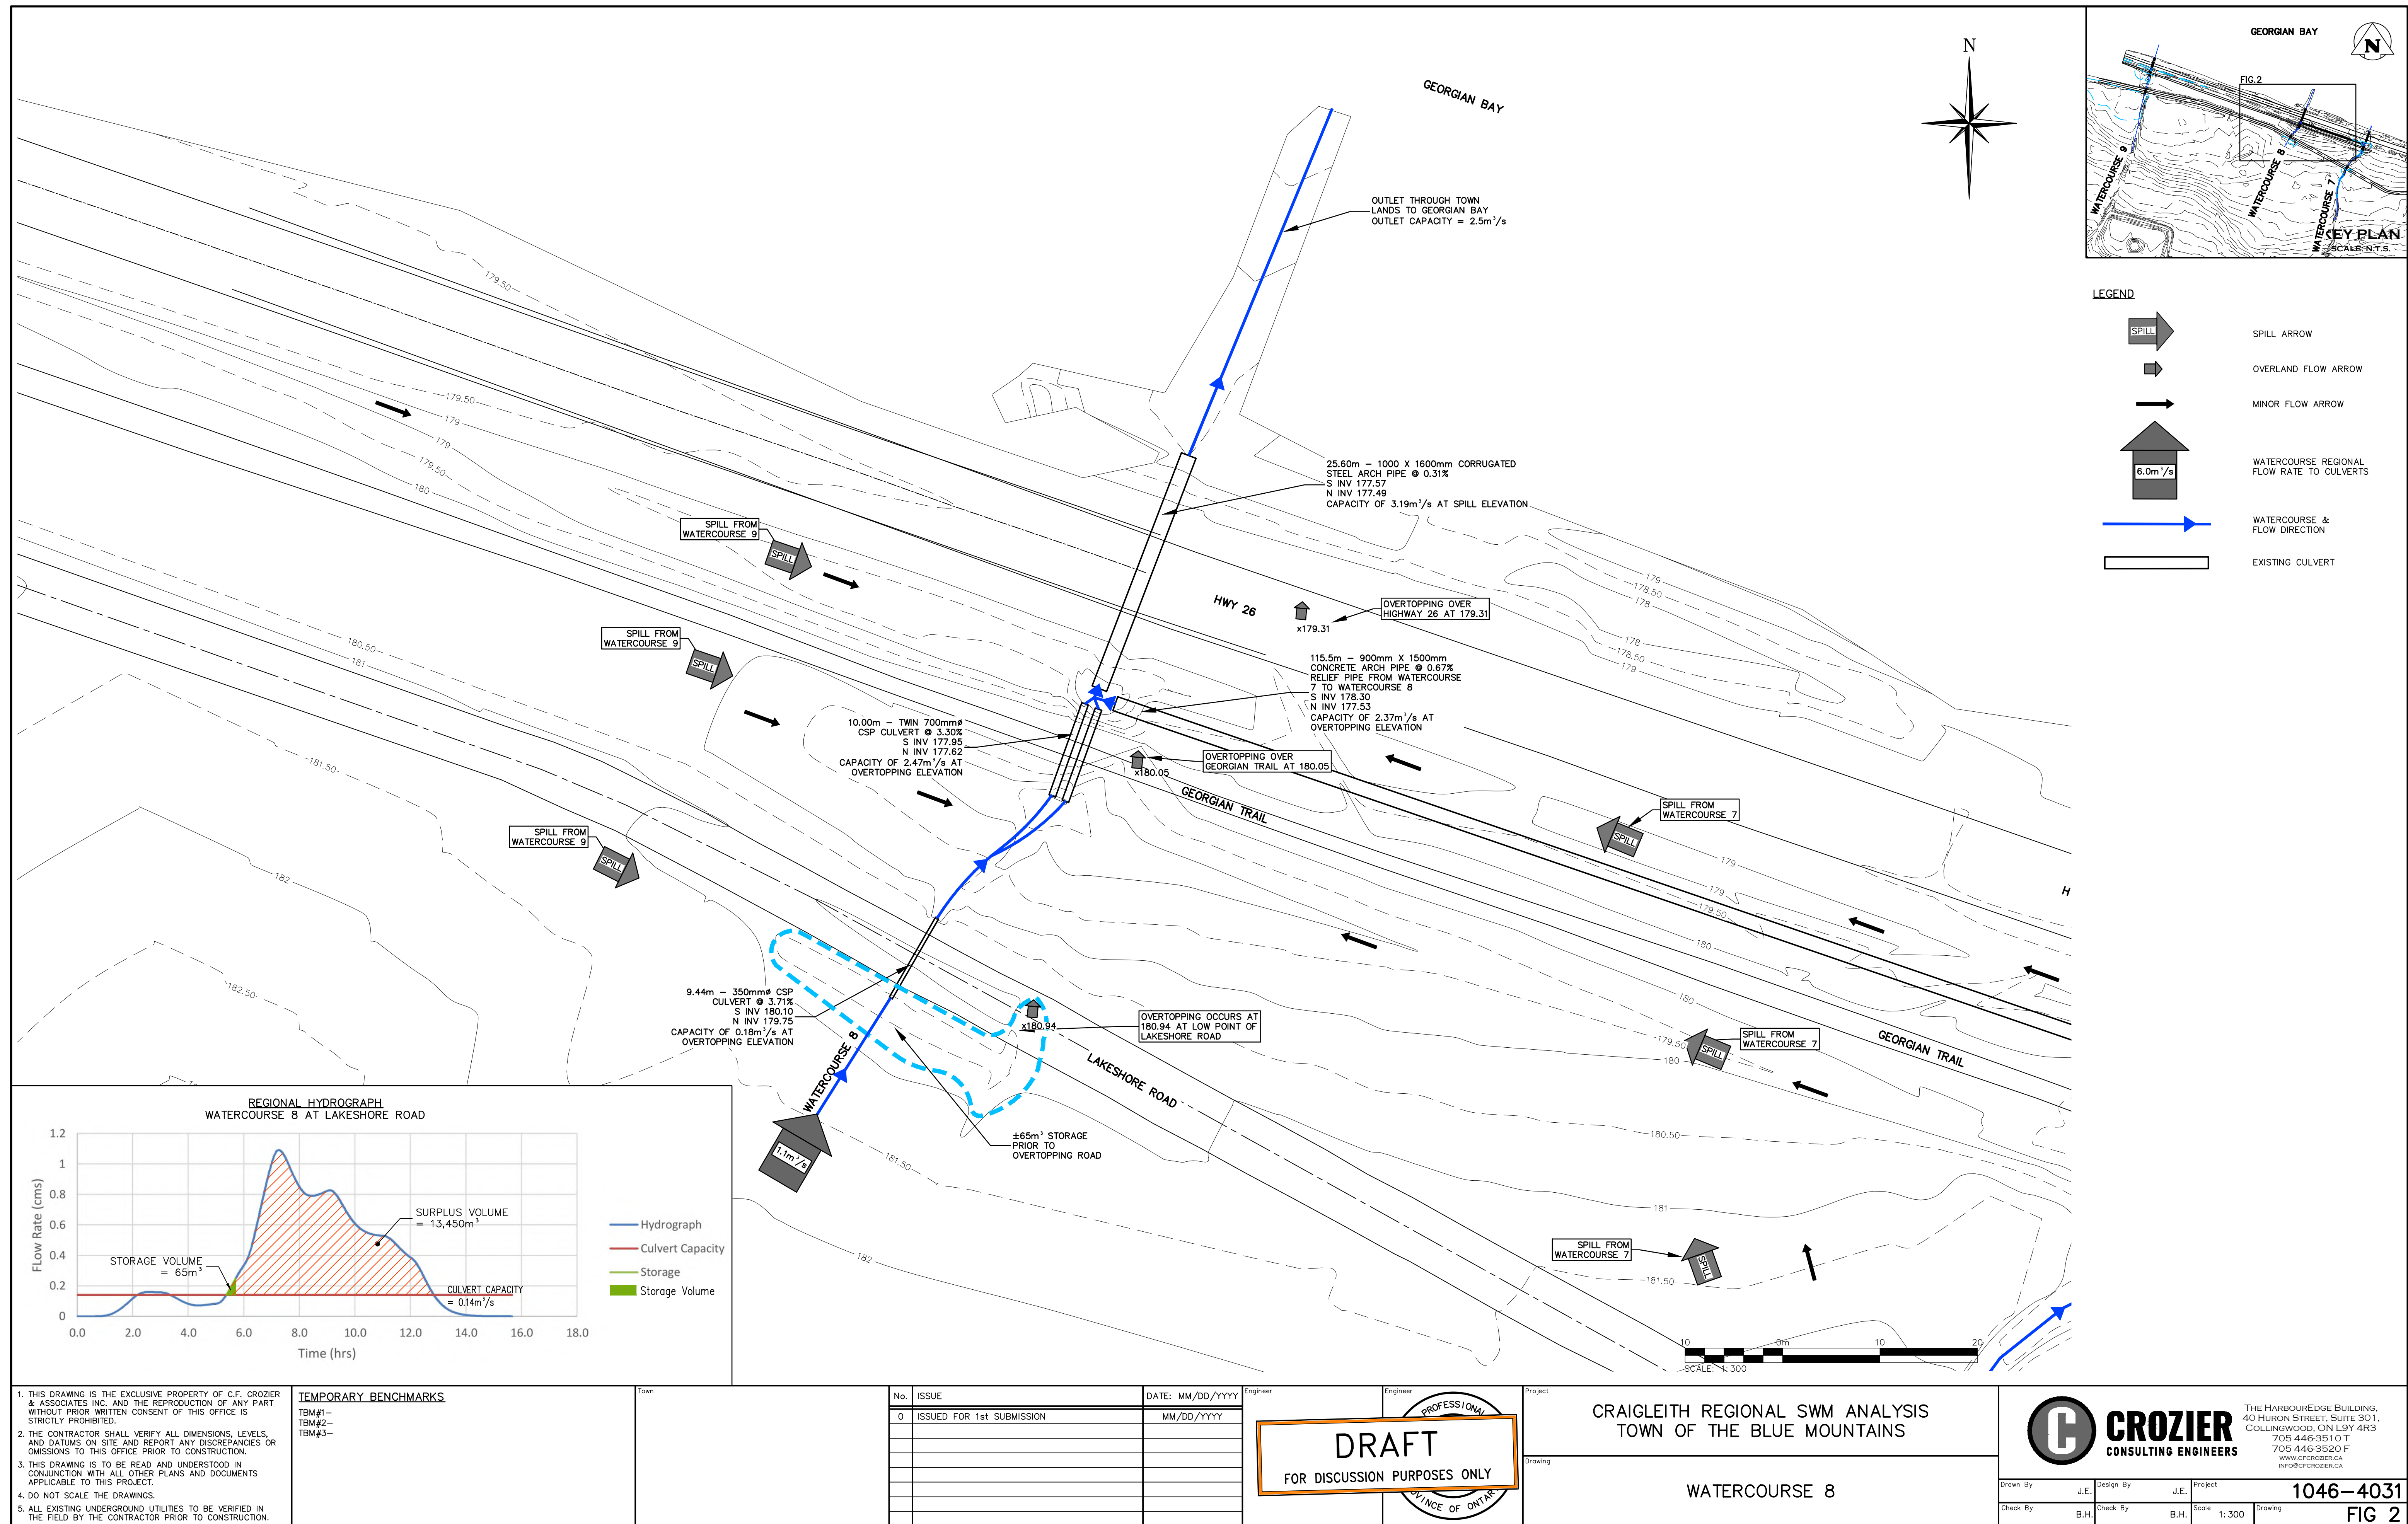

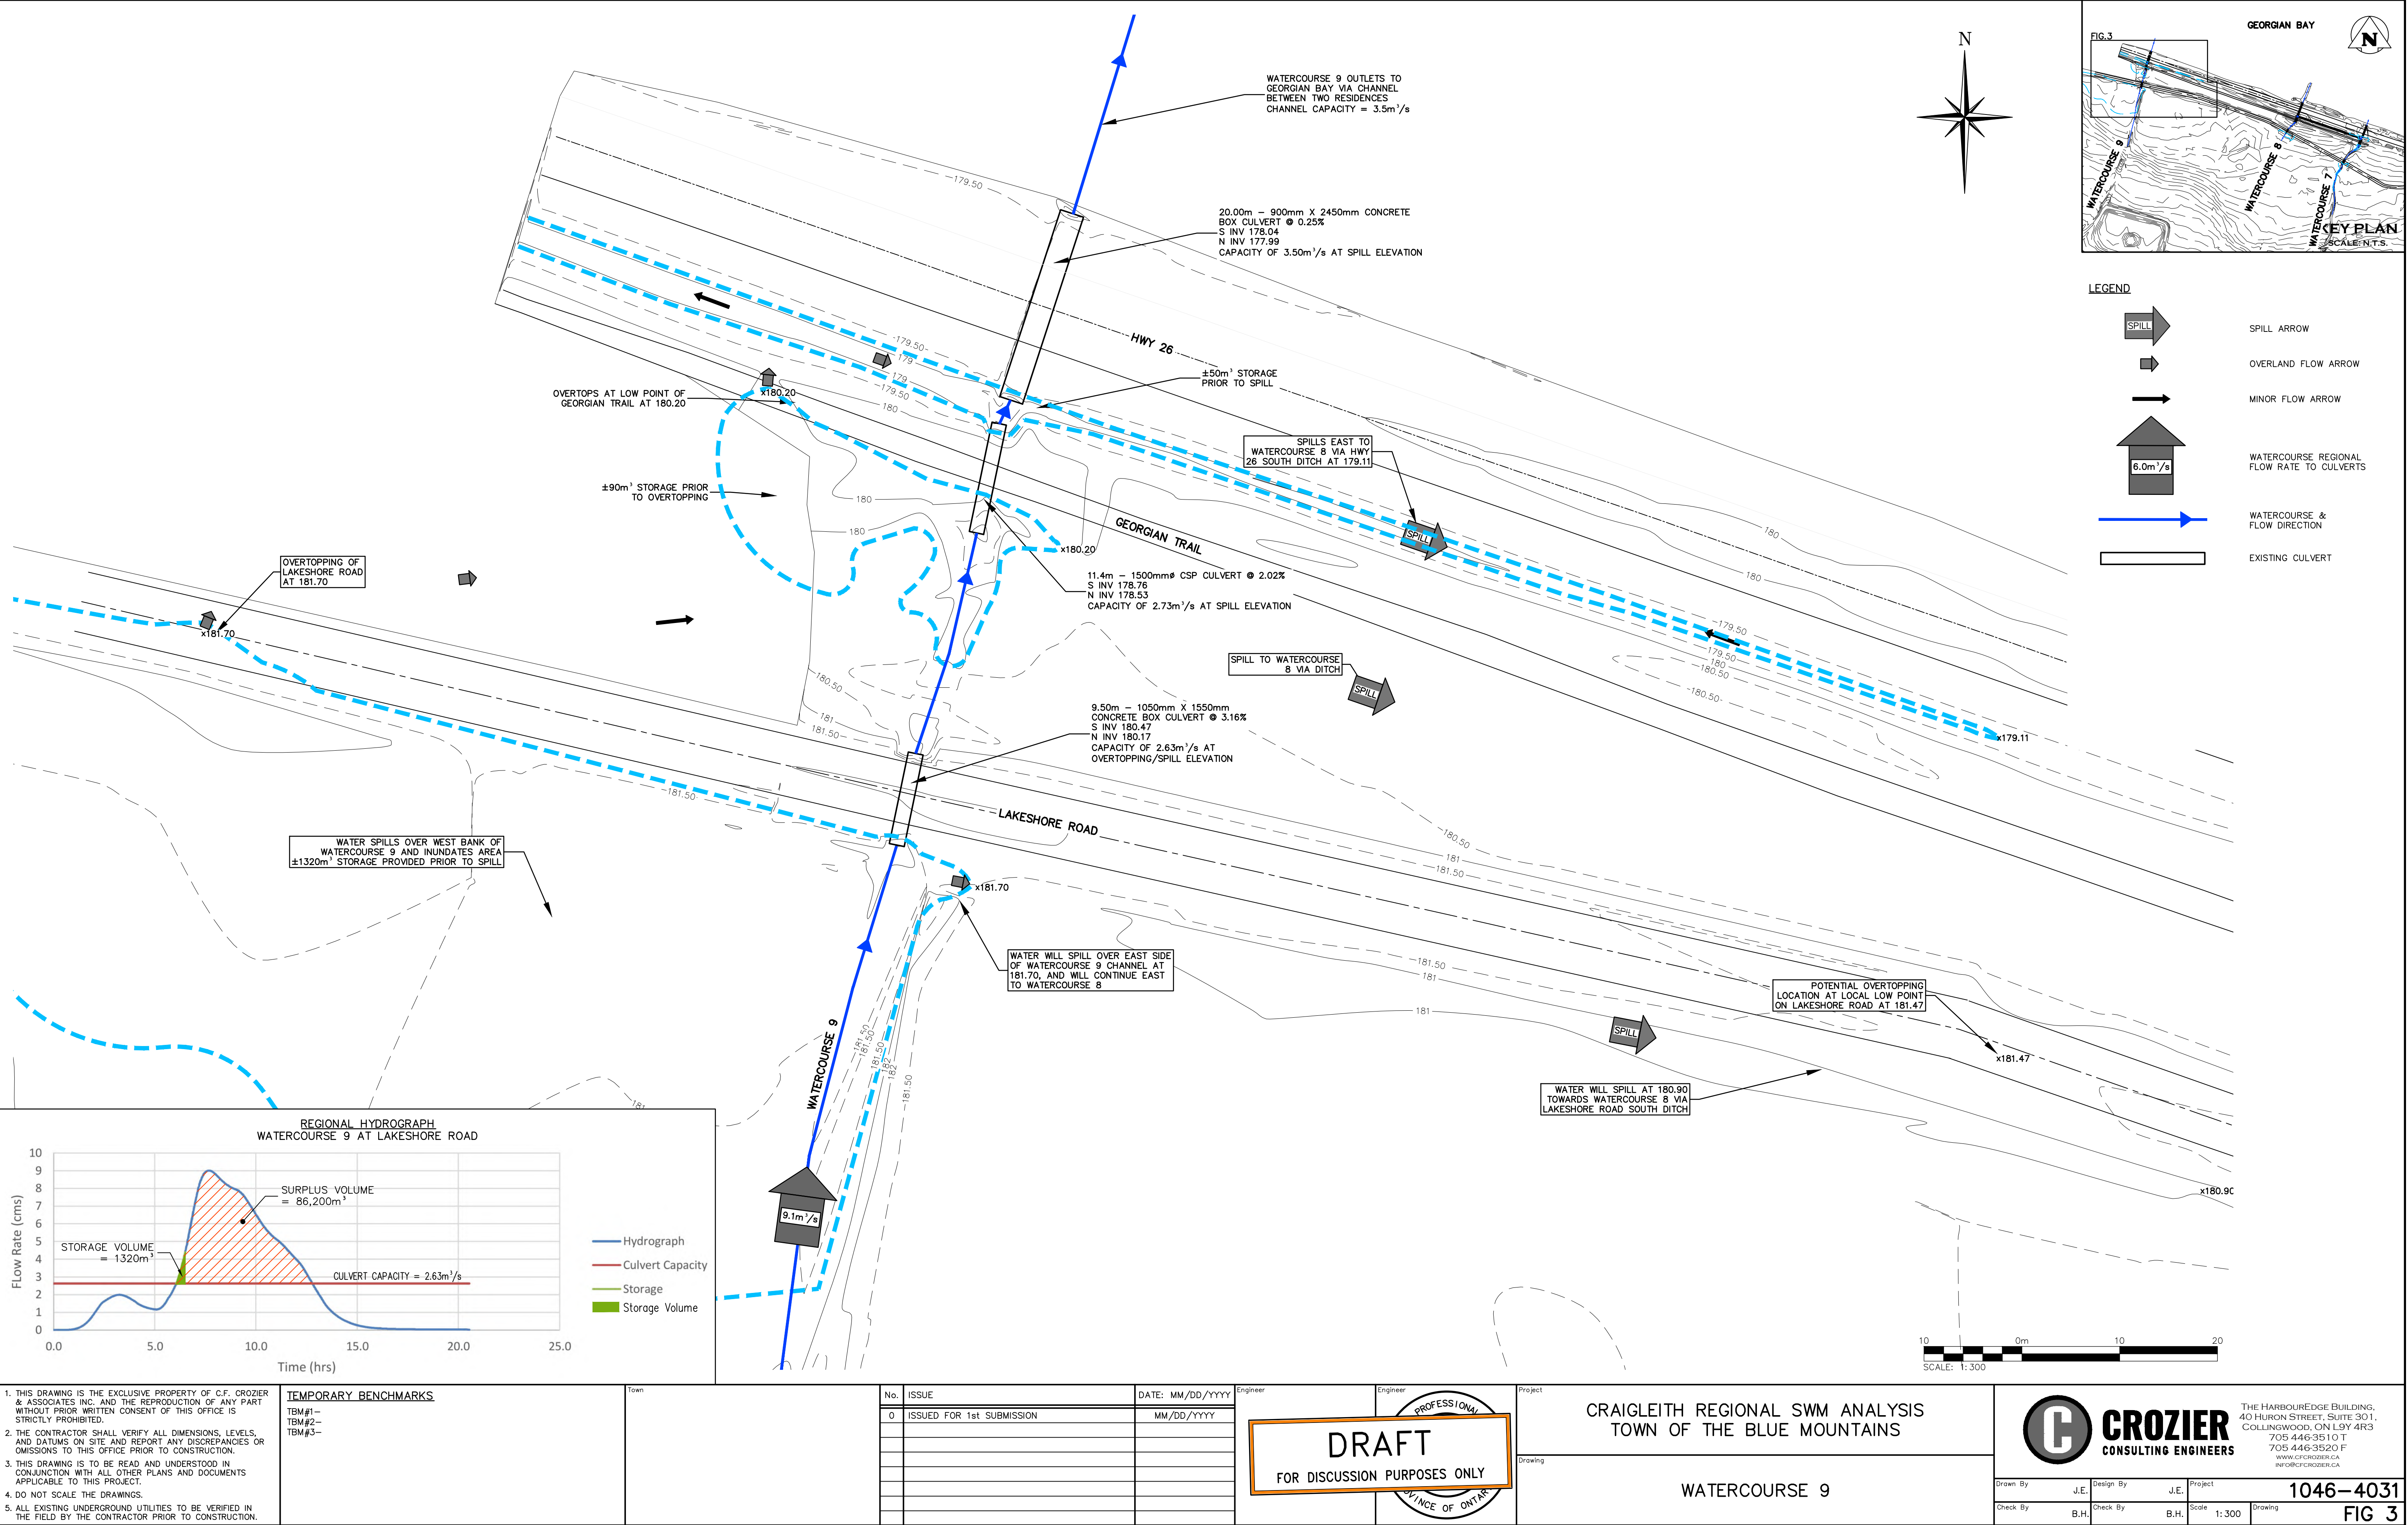

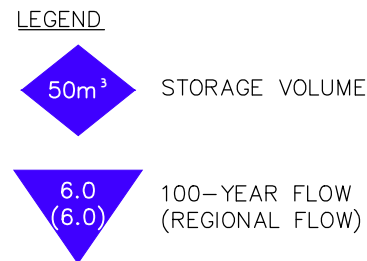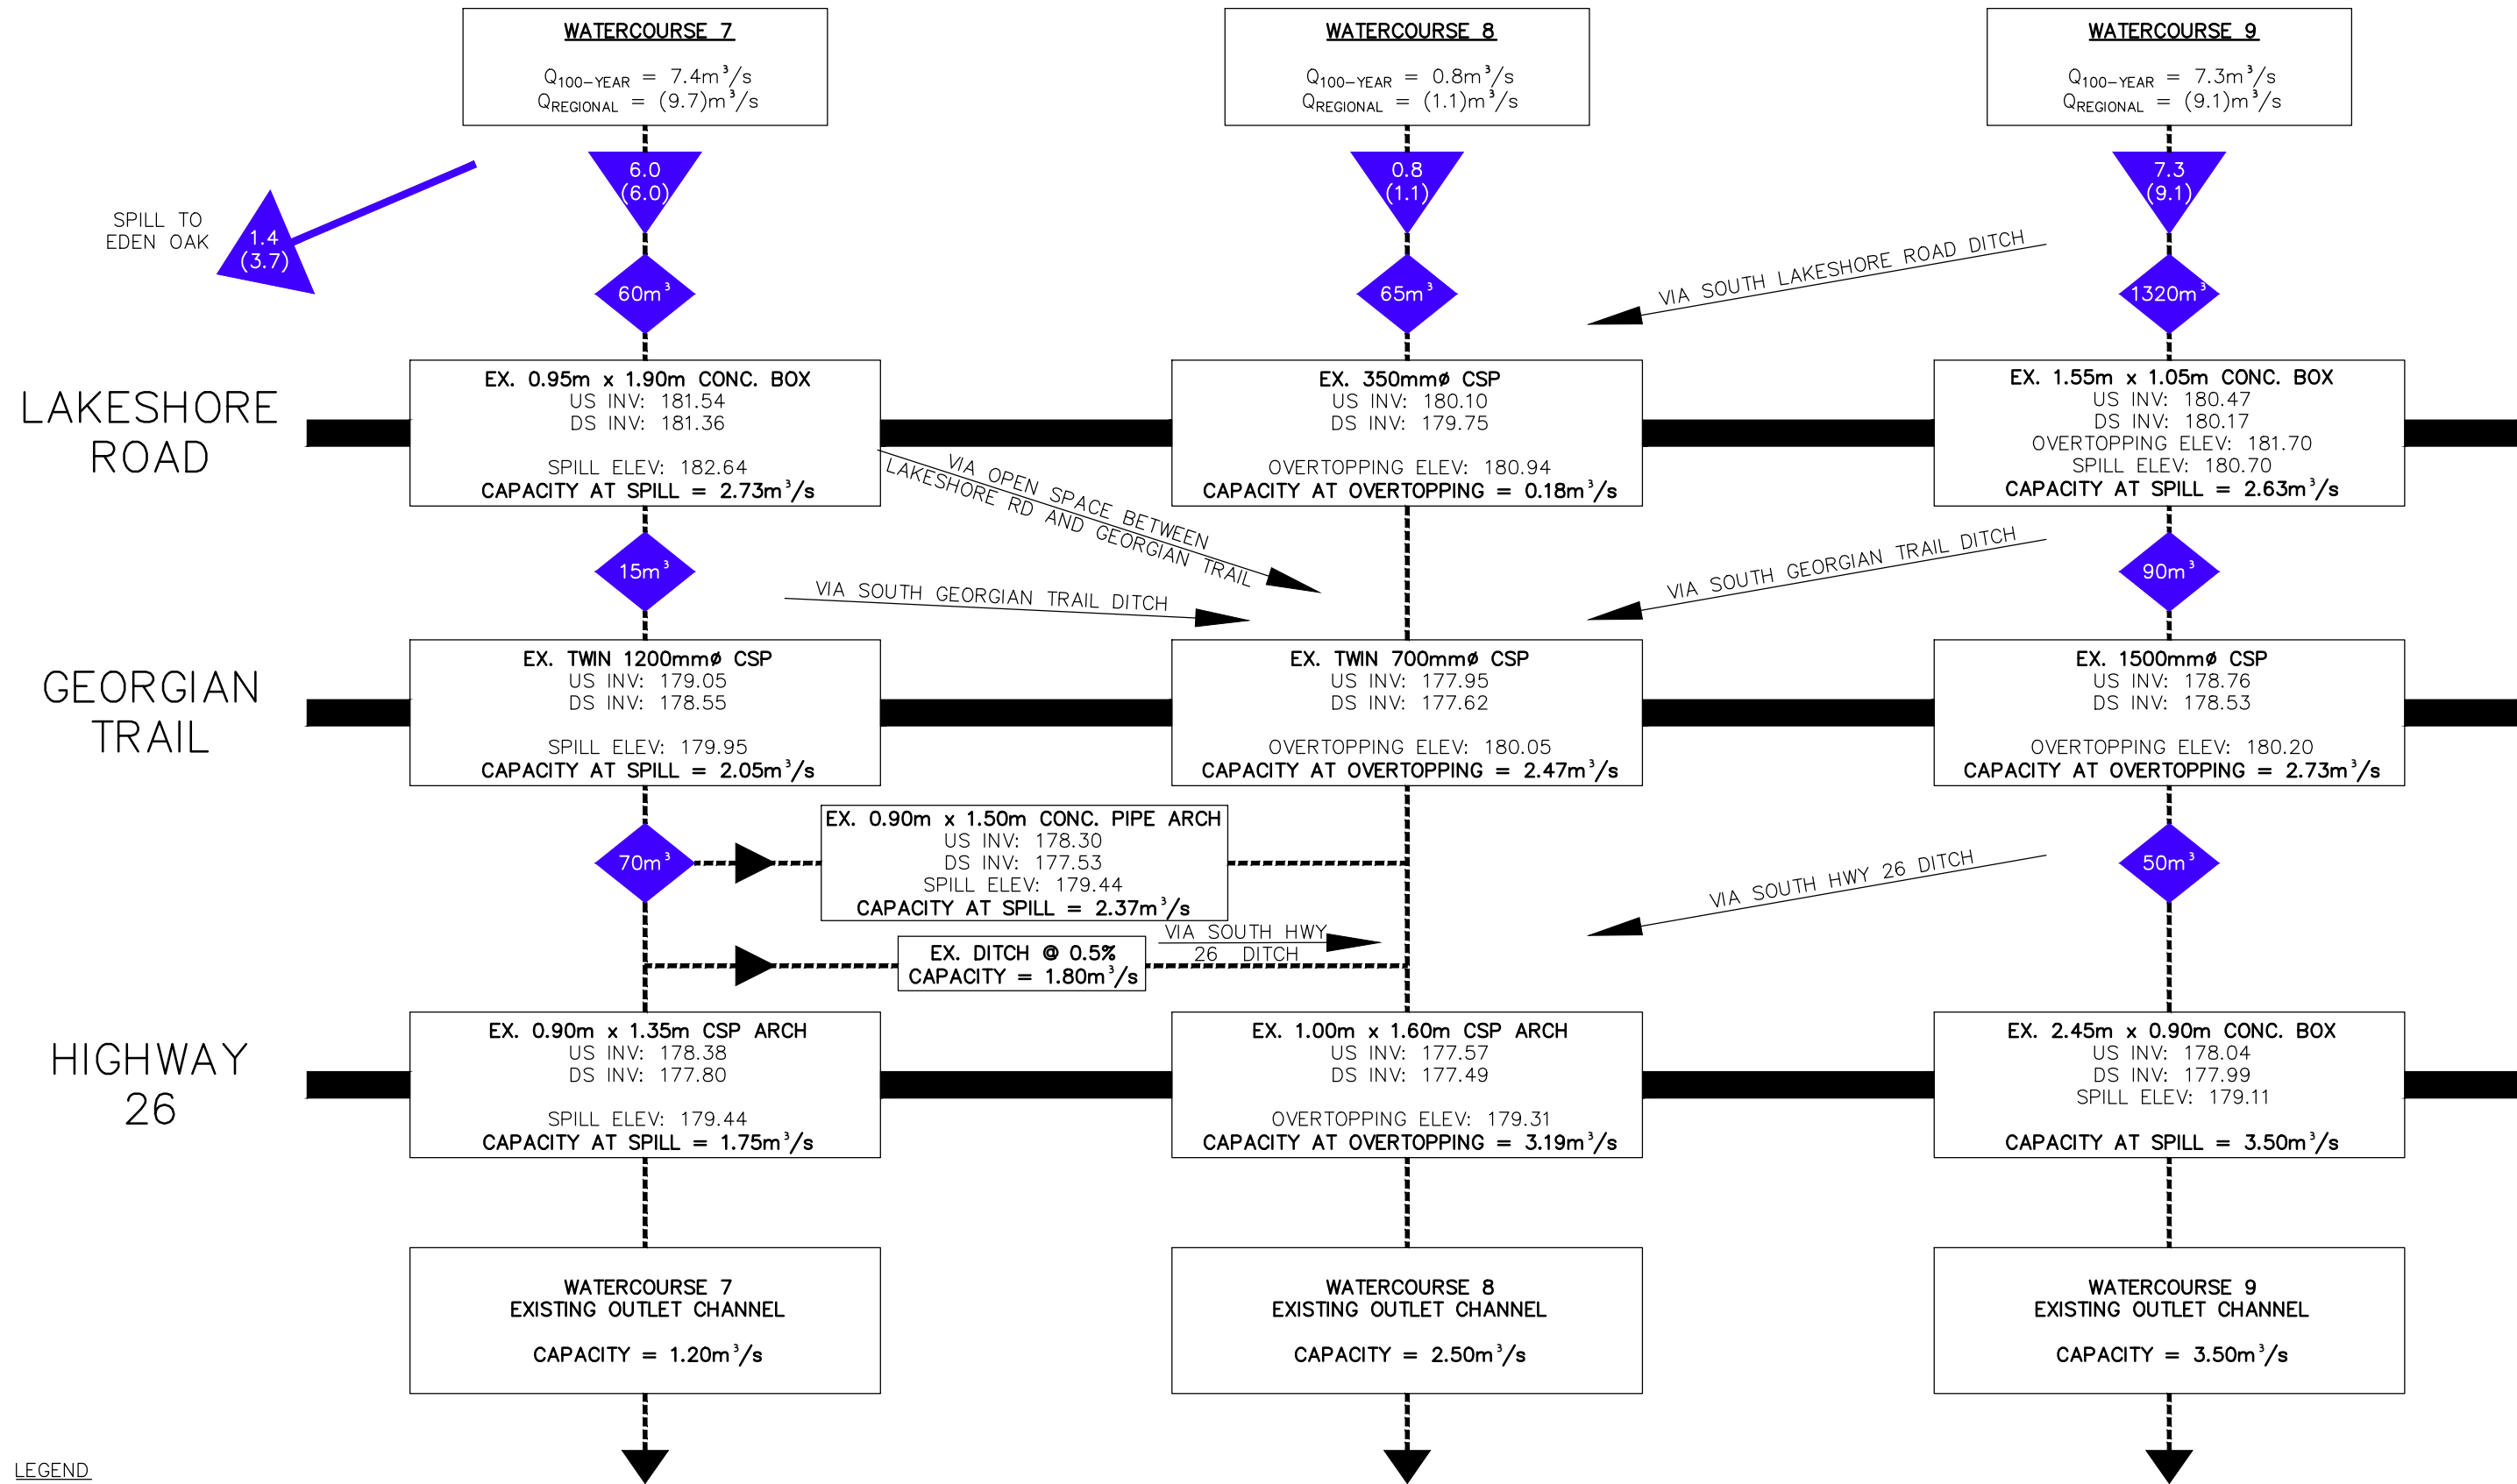

Project		CRAIGLEITH RIDGE TOWN OF THE BLUE MOUNTAINS		CROZIER CONSULTING ENGINEERS		THE HARBOUREDGE BUILDING, 40 HURON STREET, SUITE 301, COLLINGWOOD, ON L9Y 4R3 705 446-3510 T 705 446-3520 F WWW.CFCROZIER.CA INFO@CFCROZIER.CA	
Drawing		WATERCOURSES 7, 8 & 9 EXISTING CONDITIONS		1046-4031		FIG 4	
Drawn By	J.E.	Design By	J.E.	Project			
Scale		Date	FEB 2019	Check By	B.H.	Drawing	

APPENDIX D

**Regional SWM Solution – November 24, 2021, C.F. Crozier &
Associates Inc.**





1 First Street, Suite 200 | T. 705.446.3510
Collingwood, ON | F. 705.446.3520
L9Y 1A1 | cfcrozier.ca

MEMO

DATE	November 24, 2021	PROJECT NO.	1966-5748
RE	Regional SWM Solution		

TO	Brian Worsley, P.Eng.
FROM	Jessie Elder, P.Eng.

This memorandum has been prepared to summarize the current proposed design for the Craigeleith Regional Stormwater Management Solution.

The concept of the design is to direct major flows from Watercourses 7 and 9 (which have downstream capacity constraints within private properties) to Watercourse 8 (a publicly owned outlet). Upgrades to the outlet structures along Watercourse 8 are proposed to provide sufficient capacity to convey flows safely to Georgian Bay, similar to previous diversion pipes installed in the 1990's from Watercourse 7 to Watercourse 8. Refer to Figure 1B for an overview of the proposed design and to Figure 5 for a flow chart of the proposed design flow directions and capacities.

Watercourse 9 is the western most watercourse of interest in this area and flows through the Parkbridge Craigeleith Ridge development. As shown on Figure 1B, in existing conditions Watercourse 9 spills over Lakeshore Road west of the watercourse crossing, and spills to the southern Lakeshore Road ditch east of the crossing. We have proposed to control spill flows in this area to spill over Lakeshore Road and to channelize flows back to Watercourse 9. We have proposed a channel to direct surplus flows to Watercourse 8 downstream of Lakeshore Road and upstream of the Georgian Trail crossing. The diversion channel invert will be higher than the invert of the Watercourse 9 culverts under the Georgian Trail as to allow minor storm events to continue in Watercourse 9 to Georgian Bay. Major flows will enter the diversion channel for conveyance to Watercourse 8 as water backs up at the Watercourse 9 Georgian Trail culvert. Flows from Watercourse 9 will join Watercourse 8 upstream of the Georgian Trail crossing.

Watercourse 7 flows through the MacPherson Home Farm development, then through the Eden Oak Trailhead development and continues through the eastern corner of the Parkbridge Craigeleith Ridge development and 210 Lakeshore Road prior to reaching Lakeshore Road. To divert flows from Watercourse 7 to 8, a diversion channel has been proposed at the downstream end of the Eden Oak site, travelling through the Parkbridge site towards the southern Lakeshore Road ditch. A combination of culvert sizing for Eden Oak roadways, berming and grading will be used to control flows such that minor flows remain in Watercourse 7 and larger storm events are directed into the diversion channel to Watercourse 8. A culvert has been proposed to convey flows from the diversion channel under Lakeshore Road towards Watercourse 8.

Flows from Watercourse 8 and the proposed diverted flows Watercourses 7 and 9 will converge in Watercourse 8 between Lakeshore Road and the Georgian Trail.

Culvert upgrades have been proposed for the Watercourse 8 crossings under the Georgian Trail and under Highway 26. Channel upgrades have been proposed in the Town parcel downstream of Highway 26, which the Town retains ownership of the lands containing this outlet.

The culvert upgrades and downstream channel upgrades proposed for Watercourse 8 are within an existing Municipal Drain (Blue Mountain Diversion Drain). Upstream channelization works are beyond the extent of the municipal drain and will be approved by the Town through the appropriate process associated with the respective development application of each developer proponent.

Sincerely,

C.F. CROZIER & ASSOCIATES INC.



Jessie Elder, P.Eng.
Project Engineer
/je

Encl.

J:\1900\1966-Craigleith Landowners Group\5748-Craigleith Regional SWM\Memos\2021.11.24 SWM Solution Design Brief.docx

APPENDIX E

**Watercourse 7,8,9 – Regional SWM Proposed Works 0 - Figure 1B –
January 17, 2020, C.F. Crozier & Associates Inc.**



