
SERVICING & STORMWATER MANAGEMENT REPORT

**PEOPLECARE – THE TOWN OF THE BLUE MOUNTAINS
LONG-TERM CARE FACILITY**

Project No.: 2026-0316-10

ISSUED FOR SITE PLAN APPROVAL

June 30, 2026

WALTERFEDY

DISCLAIMER AND LIMITATION OF LIABILITY

This document was prepared by WalterFedy for **peopleCare Inc.** ("Client") for the specific purpose and use by the client, as described in the report and subsequent scope of work agreement. This report was completed based on the information that was available at the time of the report preparation and completion, and is subject to all limitations, assumptions and qualifications contained herein. Any events or circumstances that have occurred since the date on which the report was prepared, are the responsibility of the client, and WalterFedy accepts no responsibility to update the report to reflect these changes.

WalterFedy agrees that this report represents its professional judgement and any estimates or opinions regarding probable costs, schedules, or technical estimates provided represent the professional judgement in light of WalterFedy's experience as well as the information available at the time of report preparation. In addition, WalterFedy accepts no responsibilities for changes in market or economic conditions, price fluctuations for labour and material costs, and therefore makes no representations, guarantees or warranties for the estimates in this report. Persons relying on such estimates or opinions do so at their own risk. WalterFedy agrees with the Client that it will provide under this Agreement the standards of care, skill and diligence normally provided in the performance of services in respect of work similar to that contemplated by this Agreement.

This report may not be disclosed or referred to in any public document without the prior formal written consent of WalterFedy. Any use which a third party makes of the report is at the sole responsibility and risk of the third party.

ISSUANCE AND REVISION RECORD					
REV	DATE	WRITTEN BY	QA BY	SEALED BY	ISSUED FOR
1	June 30, 2026	T Keller	J Zehr	T Keller	Issued for SPA



Tyler Keller, P.Eng.
Civil Project Manager
Associate

tkeller@walterfedy.com
519.576.2150, Ext. 237

PEOPLECARE – THE TOWN OF THE BLUE MOUNTAINS

SERVICING & STORMWATER MANAGEMENT REPORT

Table of Contents

	Page
1.0 INTRODUCTION.....	3
1.1 Background.....	3
1.2 Reference Reports and Drawings	3
2.0 EXISTING INFORMATION.....	4
2.1 Existing Topography	4
2.2 Geotechnical Investigation.....	4
2.3 Existing Servicing and Utilities.....	5
3.0 REVIEW AGENCIES.....	5
3.1 Town of The Blue Mountains	5
3.2 Grey Sauble Conservation Authority	5
3.3 Other Agencies	5
4.0 SANITARY SERVICING	6
5.0 WATER SERVICING	6
5.1 Design Criteria	6
5.2 Domestic Water Demand.....	6
5.3 Fire Flow Demand.....	7
5.4 Service Design	7
6.0 STORM SERVICING AND STORMWATER MANAGEMENT	8
6.1 Stormwater Management Objectives and Design Criteria.....	8
6.2 Existing Stormwater Management Facility	8
6.3 Stormwater Management Design.....	8
7.0 SITE GRADING	8
7.1 Compliance with On-Site and Excess Soil Management Provincial Regulations	9
8.0 EROSION AND SEDIMENT CONTROL	9
9.0 CONCLUSIONS	9

DRAWINGS

FIGURES

Appendix A	Sanitary Design
Appendix B	Watermain Design

1.0 INTRODUCTION

WalterFedy was retained by peopleCare Inc. to complete a Servicing and Stormwater Management Report in support of a Site Plan Application (SPA) for their proposed long-term care facility within the Town of The Blue Mountains. The development will be 3-storeys and will include 192 long-term care beds, along with associated surface parking and amenity space. The rear of the building is proposed to include a walk-out condition to suit the existing natural grade on site.

The purpose of this Functional Servicing and Stormwater Management Report is to identify how the development will be serviced, including water, storm, and sanitary connections to the existing municipal infrastructure. C.F. Crozier & Associates Inc. (Crozier) has completed a Servicing and Stormwater Management report for the proposed townhouse development east of peopleCare's site and a Stormwater Management Updated Memorandum for the surrounding Home Farm subdivision, which are both owned by MacPherson Builders.

The report completed for MacPherson's townhouse development also accounts for peopleCare's long-term care facility. WalterFedy has coordinated closely with Crozier to provide required site statistics and anticipated water and wastewater demands. Storm and sanitary connections from this long-term care development will be conveyed to the stormwater management facility and sanitary pump station that was installed for the Home Farm subdivision, via a municipal easement that runs through MacPherson's site.

1.1 Background

The proposed development will be on land that is currently owned by the Town of the Blue Mountains, known as "Future Town Development Lands". This land will be purchased by peopleCare prior to development. The Town's new fire hall is currently being constructed south of the subject site. MacPherson's townhouse development is proposed east and southeast of the site. The Home Farm subdivision is approximately 150m south of the site. The site is also bound by residential homes to the west, that front onto Grey Road 19. Another proposed residential subdivision, referred to as "Parkbridge Craighleith" is north of the site.

The site is currently zoned Development (D). The proposed zoning is Institutional (I).

A new municipal right-of-way will be extended from the Home Farm subdivision to the proposed development in order to provide access to the site and frontage to a municipal road. A municipally owned watermain is also proposed within the new roadway, which will service the long-term care facility.

The proposed property area is approximately 1.42 ha. The final property boundaries will be coordinated with the Town of The Blue Mountains as part of the land purchase agreement. The site currently exists as an open field.

A portion of the northwest corner and northeast corner of the site are within a Grey Sauble Conservation Authority regulated area.

1.2 Reference Reports and Drawings

In preparation of this report, the following background information was referenced:

1. Home Farm - Town of The Blue Mountains - General Servicing Plan, C.F. Crozier & Associates Inc., June 4, 2025. Prepared for The Town of The Blue Mountains.
2. Parkbridge Craighleith - Town of The Blue Mountains - Overall Site Grading Plan (West), C.F. Crozier & Associates Inc., December 12, 2023. Prepared for The Town of The Blue Mountains.
3. Town of The Blue Mountains, Fire Station 2 - Issued for Tender Drawings, J.L.Richards, April 16, 2025. Prepared for The Town of The Blue Mountains.

4. Stormwater Management Update Memorandum – Home Farm Residential Development, C.F. Crozier & Associates Inc., March 12, 2024.
5. Geotechnical Investigation – Proposed Home Farm Residential Development, Town of the Blue Mountains, Ontario, by Terraprobe Inc., Dated July 4, 2011.
6. Geotechnical Investigation – Proposed 3-Storey Long-Term Care Facility, 796511 Grey Road 19, The Blue Mountains, Ontario, by Chung & Vander Doelen Engineering Ltd., June 2, 2026
7. Water Distribution System Memo – Home Farm Rental Development, by C.F. Crozier & Associates Inc., June 25, 2026

The following guidance documents were also referenced in preparation of this report:

1. Design Guidelines for Sewage Works, Ministry of the Environment, Conservation and Parks, March 2019
2. Design Guidelines for Drinking Water Systems, Ministry of the Environment, Conservation and Parks, May 2019
3. Town of The Blue Mountains Municipal Master Plan for Town-Wide Water Distribution System, J.L.Richards, October 2019
4. Engineering Standards, Town of The Blue Mountains, May 2023

2.0 EXISTING INFORMATION

2.1 Existing Topography

A topographic survey of the site was completed by WalterFedy in April 2026. Legal plans for the site will be created as part of the land purchasing agreements with the Town. The site is currently undeveloped and consists primarily of an open field. A wooded area exists to the northeast corner of the site.

The site naturally drains from southwest towards the northeast, with elevations ranging from 220.00 m at the northwestern corner, to 213.00 m at the northeastern corner. Elevations along the western property line fall to 217.25 m at the northwest corner. The eastern property line currently falls from an elevation of 216.00 m at the southeastern corner to 213.00. However, the proposed townhouse development is proposing grades of approximately 218.00 along the boundary with the subject site.

2.2 Geotechnical Investigation

A geotechnical investigation for the Home Farm subdivision was completed by Terraprobe in June 2011, with the report being finalized in July 2011. One borehole (BH1) was advanced within the subject site area, with a monitoring well being installed to measure groundwater levels. The surface elevation of the borehole was 216.60 m. At the time of the investigation, this area consisted of 125mm of silty topsoil, underlain with sandy silt to a depth of 3.7 m below the surface. The borehole was withdrawn at this depth due to the auger grinding on what was assumed to be boulders. The borehole remained dry and open upon completion of drilling.

The groundwater was measured to be 0.2m above the surface in both June and July of 2011.

A site-specific geotechnical investigation was completed by Chung & Vander Doelen Engineering Ltd., in June 2026. Ten (10) boreholes were advanced to depths between 3.20 m and 9.40 m below the surface. Two (2) monitoring wells were also installed within two of the boreholes.

Topsoil was encountered at the surface of all boreholes to depths ranging between 200mm and 275mm. The topsoil is underlain with sandy silt to silty sand till to depths between 3.20 m and 9.40 m below the surface, to termination depth.

Groundwater was measured at BH2 and BH4 at the time of drilling in April 2026, and observed via a site visit in May 2026. Groundwater depths at BH2 were measured to be 3.99 m below the surface, corresponding to an elevation of 211.58. It was noted that the stabilized groundwater is anticipated to be closer to the surface and actual depth may require an extended period to fully stabilize due to low-permeability soil. The groundwater depth at BH4 was measured to be 0.16m below the surface. Groundwater depth is expected to vary seasonally and in response to weather events. Future groundwater readings are planned.

2.3 Existing Servicing and Utilities

Services surrounding the site were documented by Crozier in their General Servicing Plans prepared for the Home Farm subdivision. No municipal services currently exist within the immediate vicinity of the subject site.

As part of the Home Farm Subdivision, servicing stubs were provided to account for future developments to the north. This includes a 200-mm-diameter sanitary stub sloped at 0.5%, a 200-mm-diameter water main, a 450-mm-diameter storm stub sloped at 2.0%, and a knockout within a double catchbasin manhole with a downstream 825-mm-diameter storm sewer. The 450-mm-diameter storm sewer also connects to the 825-mm-diameter storm sewer. A stormwater management facility exists immediately south of the 825-mm-diameter storm sewer.

The sanitary stub connects to a 200-mm-diameter sanitary sewer, which conveys flows towards a pumping station. The pump station then conveys flows towards the municipal gravity sanitary sewer system on Grey Road 19 via forcemain.

A 200-mm-diameter watermain loops throughout the Home Farm subdivision and connects to the existing 350-mm-diameter municipal watermain on Grey Road 19.

Other utilities, such as hydro, gas, and telecommunications services can be provided to the site from the Home Farm subdivision.

3.0 REVIEW AGENCIES

3.1 Town of The Blue Mountains

The Town of the Blue Mountains will be responsible for the review and approval of the Site Plan Approval application, as well as the site grading, servicing, and stormwater management design for the overall development.

3.2 Grey Sauble Conservation Authority

As a portion of the site is within a Grey Sauble Conservation Authority (GSCA) regulated limited, the GSCA will be required to review and approve the proposed grading and stormwater management design.

3.3 Other Agencies

The development will require review by other utility providers having jurisdiction, including but not limited to, telecommunications, gas and hydro.

4.0 SANITARY SERVICING

The proposed development is to include a 192-bed long-term care facility. The Ontario Building Code (OBC) states that long-term care facilities generate an average sanitary demand of 450 L/bed/day. The sanitary demand for the site was peaked using the Harmon Formula, with the number of beds being used as the population. The Town of The Blue Mountains also stipulates an extraneous flow rate of 0.28 L/s/ha. Table I represents the anticipated sanitary demand from the proposed development.

Table I: Proposed Sanitary Flow from Proposed Development

Long-Term Care Beds	192
Average Daily Flow (Town of The Blue Mountains)	450 L/bed/day
Peaking Factor (Harmon)	4.154
Peaked Long-Term Care Demand	4.154 L/s
Site Area	1.42 ha
Extraneous Flow Allowance	0.28 L/s/ha
Total Extraneous Flow	0.398 L/s
Total Sanitary Flow	4.552 L/s

For a developed site with a design population of 192 (number of proposed long-term care beds), and an area of 1.42 ha, the anticipated peaked sanitary demand is 4.55 L/s. Refer to Appendix A for the sanitary demand calculations. It should be noted that this flow rate will be combined with the sanitary flows from the proposed townhouse development to the east.

Crozier will be responsible for designing a municipal sanitary sewer through MacPherson's townhouse development within a municipal easement. This sewer will accept the sanitary flows from the long-term care development and convey them towards the pump station. Refer to the Functional Servicing and Stormwater Management Report by Crozier for MacPherson's townhouse development, which includes sanitary flows from this subject development, for the pumping station capacity analysis.

5.0 WATER SERVICING

5.1 Design Criteria

The Town of The Blue Mountains Engineering Standards recommend a pressure range within their watermains of 350 kPa (50 psi) to 550 kPa (80 psi) under average and maximum day conditions, and 275 kPa (40 psi) to 700 kPa (100 psi) under peak hour conditions. Under fire flow conditions, the minimum allowable pressure is 140 kPa (20 psi). The guidelines also state that the maximum velocity within a watermain should not exceed 5.0 m/s.

5.2 Domestic Water Demand

The OBC sanitary demand of 450 L/cap/day was also used for the domestic water demand calculations for the development. The domestic demand was peaked using Table 3-3 in the MECP guidelines for drinking water systems serving fewer than 500 people, with a maximum day factor of 4.54 and a peak hour factor of 6.84, for a population of 192 people. The values provided in the MECP table were interpolated between 150 and 300 people. The same design populations used in the sanitary demand calculations were also used for the water demand calculations. Table II below summarizes the overall proposed domestic water demand for the development.

Table II: Proposed Domestic Water Demand

Long-Term Care Beds	192
Average Demand (OBC)	450 L/bed/day
Peaking Factors (MECP)	
Max Day	4.54
Max Hour	6.84
Total Max Day Demand	4.54 L/s
Total Max Hour Demand	6.84 L/s

The anticipated maximum day demand is 4.54 L/s, and the maximum hour demand is 6.84 L/s. Refer to Appendix B for the domestic water demand calculations.

5.3 Fire Flow Demand

Fire flow requirements were calculated using the current issue of *Water Supply for Public Fire Protection* published by the Fire Underwriters Survey (FUS). To facilitate calculations, it is necessary to determine whether buildings are to be protected by a sprinkler system, as the resulting requirement for fire flow is calculated differently for buildings with or without sprinkler systems. Based on the Building Code Analysis, it is noted that the proposed building will be fitted with a sprinkler system. As such, the fire flow for the site will need to be designed per NFPA 13 *Standard for Installation of Sprinkler Systems* (2013), which stipulates the criteria used for determining fire flow for buildings with sprinklers.

Table III summarizes the proposed fire demand for the long-term care parcel. The fire demand calculations can also be found in Appendix B.

Table III: Fire Flow Demand

Type of Construction	Non-Combustible Construction (C=0.8)
Effective Floor Space	7,627.50 m ²
Occupancy Charge	Limited-Combustible Contents (-15%)
Automated Sprinkler Protection	Yes
Designed to NFPA 13 Standard	Yes (-30%)
Standard Water Supply to Sprinklers and Standpipes	Yes (-10%)
Fully Supervised System	Yes (-10%)
Exposure Charges	+15%
Fire Flow Demand	150 L/s (2378 usgpm)

The proposed fire demand for the long-term care development is 150 L/s. A private hydrant will be required on site to provide adequate fire protection.

5.4 Service Design

The water service shall be sized to convey the combination of the Maximum Day Demand and the Fire Demand, within the pressure and velocity ranges as specified. This combined flow rate is 154.54 L/s, which can be serviced via a 200-mm-diameter water service.

A new municipal watermain will be designed within the proposed right-of-way extension concurrently with the detailed design of the long-term care facility. This new watermain will connect to the municipal watermain through the neighbouring townhouse development, creating a looped system. A new 200-mm-diameter service will branch off this watermain to service the development. The *Water Distribution System Memo* by Crozier states that the available flow at 20 psi at peopleCare's connection point is approximately 212.67 L/s (J-R4). A new, private hydrant will also be installed on the site.

6.0 STORM SERVICING AND STORMWATER MANAGEMENT

6.1 Stormwater Management Objectives and Design Criteria

The Town of the Blue Mountains Engineering Standards are to be used for this development. The following stormwater management criteria are expected to be applicable:

- 'Enhanced' water quality control with 80% long-term average-annual total suspended solids (TSS) removal; and
- Post-to-pre-development peak flow control for the 2-year through the 100-year return period design storms.
- Limit surface ponding around buildings to be a minimum of 0.30 m below the surrounding finished floor elevation and limit flooding across the site to a maximum depth of 0.45 m for the 100-year storm event.

6.2 Existing Stormwater Management Facility

The northern stormwater management facility within the Home Farm subdivision will accept runoff from the majority of the site. The top of pond elevation is 215.30 and was designed to have a ponding elevation of 214.90 m during the 100-year storm event. The pond has a total volume of 5,870 m³ and was designed to control an overall catchment of 10.72 ha. The volume in the pond during the regional storm event is expected to be 5,154 m³, corresponding to an elevation of 215.02.

The pond was designed to provide quantity and quality control for the subject site area. For the design of the pond, the subject site was originally considered in an overall catchment with an area of 5.37 ha, and an imperviousness of 55.5%. This catchment also includes the fire hall site and the townhouse development. This catchment area has increased in size to accommodate the proposed developments.

6.3 Stormwater Management Design

Crozier will be responsible for designing a municipal storm sewer through MacPherson's townhouse development within an easement. This sewer will accept the stormwater runoff from the long-term care development's building roof and parking lot, and convey the flows towards the stormwater management facility. Internal catchbasins and storm sewers will be required within the site.

Refer to the Functional Servicing and Stormwater Management Report by Crozier for MacPherson's townhouse development, which includes this subject site area, for the new catchment parameters and the corresponding performance of the pond. If required, the long-term care facility can be designed with flow control roof drains to limit the flow rate leaving site.

The rear portion of the site behind the proposed building will be at a lower level than the surrounding parking lot, and as a result, will not be able to drain to the stormwater management facility. This area is proposed to only consist of landscaping features, and no stormwater quantity or quality control will be required.

7.0 SITE GRADING

The grading of the site will respect the existing grades along the western and northeastern property lines, and match into proposed grading of the fire hall to the south, the proposed grades of the Parkbridge Craighleith development to the north, and the proposed grades of the townhouse development to the east and southeast. The site will also be graded to comply with the Town of The Blue Mountains standards, as well as the Accessibility for Ontarians with Disabilities Act (AODA).

Major overland flow from the parking area will be directed towards MacPherson's townhouse development to the east. Retaining walls will be required to facilitate the walk out condition at the rear of the building.

7.1 Compliance with On-Site and Excess Soil Management Provincial Regulations

The MECP regulation O.Reg. 406/19 "On-Site and Excess Soil Management" under the Environmental Protection Act states that the excavation of excess material, and subsequent off-site disposal of excess soils from this site, will require testing and reporting in the MECP's Environmental Activity and Sector Registry (EASR). The Owner and Contractor will be responsible for complying with all of the noted requirements.

8.0 EROSION AND SEDIMENT CONTROL

Any sediment tracked onto the roadway during the course of construction will be cleaned by the Contractor. To help minimize the amount of mud being tracked onto the roadway, a mud mat will be installed at the primary construction access. Additionally, silt fence will be installed around the development limits to eliminate any sediment from leaving the site and will remain in place and be maintained until landscaping has been completed and soil has been vegetated. Silt fence will also be installed around any stockpiles on site, with the stockpiles kept a minimum 2.5 m from the property boundary.

Silt sacs in catchbasins will be installed to prevent silt or sediment-laden water from entering inlets. These will be inspected to ensure that they have been properly installed and function as designed throughout construction.


The controls will be maintained, and accumulated sediments removed once their capture capacity has been decreased by one third. It is proposed that, during construction activities, visual monitoring will be conducted bi-weekly and within 24 hours of any rainfall event of 25 mm or greater. During the construction period, monitoring will consist of visual observation for the effectiveness of the sediment and erosion controls and sediment migration off site. Construction inspections will be conducted until such time as the construction activities are complete, the site has been stabilized, and all vegetation has achieved a minimum 70% density.

9.0 CONCLUSIONS



Based on the analysis presented in this report it is concluded that:




- The proposed long-term care development will be serviced via a 200-mm-diameter sanitary sewer that will run through the neighbouring MacPherson townhouse development via a municipal easement. This sewer will convey the flows towards the pump station.
- The site will be serviced via a new 200-mm-diameter watermain that will be looped through the right-of-way extension and the neighbouring townhouse development.
- The northern stormwater management facility constructed for the Home Farm subdivision is expected to provide quantity and quality control for the proposed development.
- Stormwater runoff from the site will be conveyed to the stormwater management facility via storm sewers within a municipal easement through MacPherson's townhouse site. Major overland flow from the parking lot will also run through MacPherson's townhouse site.
- Site grading will match into existing grades at property lines, or the proposed grading plans of neighbouring developments as appropriate.
- Perimeter silt fence, silt fence at the base of all stockpiles, silt sacs in catchbasins, and construction entrance mud mats can provide erosion and sediment control. These will be included in detailed design in coordination with the proposed construction staging plan.

DRAWINGS



1. TOPOGRAPHIC INFORMATION AND LEGAL BOUNDARY DATA OF THE SITE FROM SURVEY BY WATERFEDY, DATED APRIL 2026.
2. BOREHOLE LOCATIONS AND GEOTECHNICAL INFORMATION FROM CHUNG & VANDER DOELLEN ENGINEERING LTD. DATED JUNE 2, 2026.
3. THIS SET OF PLANS SHALL NOT BE USED FOR CONSTRUCTION UNTIL STAMPED BY THE DESIGN ENGINEER AND APPROVED BY THE LOCAL MUNICIPALITY.
4. NO CHANGES ARE TO BE MADE WITHOUT THE APPROVAL OF THE DESIGN ENGINEER.
5. THIS PLAN NOT TO BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE PERMISSION OF WATERFEDY.
6. THE POSITION OF POLE LINES, CONDUITS, WATERMAINS, SEWERS, AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS AND, WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING ANY WORK, THE CONTRACTOR SHALL INFORM THEMSELVES OF THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES AND SHALL ASSUME ALL LIABILITY FOR DAMAGE TO THEM AND THOSE NOT LOCATED PRIOR TO CONSTRUCTION.
7. ANY AREA DISTURBED DURING CONSTRUCTION SHALL BE RESTORED TO ITS ORIGINAL CONDITION OR BETTER TO THE SATISFACTION OF THE CONSULTANT AND AUTHORITY OVERSEEING CONSTRUCTION. THE LOCAL INFLUENCER IS RESPONSIBLE FOR RESTORING ALL DAMAGED AND/OR DISTURBED PROPERTY WITHIN THE MUNICIPAL RIGHT-OF-WAY TO MUNICIPAL STANDARDS.
8. ALL HEALTH AND SAFETY RELATED SIGNAGE MUST BE POSTED AT THE SITE AS REQUIRED BY APPLICABLE LAW AND BEST MANAGEMENT PRACTICES.
9. AT THE END OF CONSTRUCTION, THE CONTRACTOR SHALL PROVIDE THE CONSULTANT WITH A DIGITAL FILE OF AS-CONSTRUCTED DRAWINGS. THE DRAWINGS MUST REFLECT THE CONSTRUCTED STATE OF THE PROJECT AND THE PRESENCE OF UNALTERED DESIGN DRAWINGS AND CONTRACT CHANGES WILL NOT BE ACCEPTED.

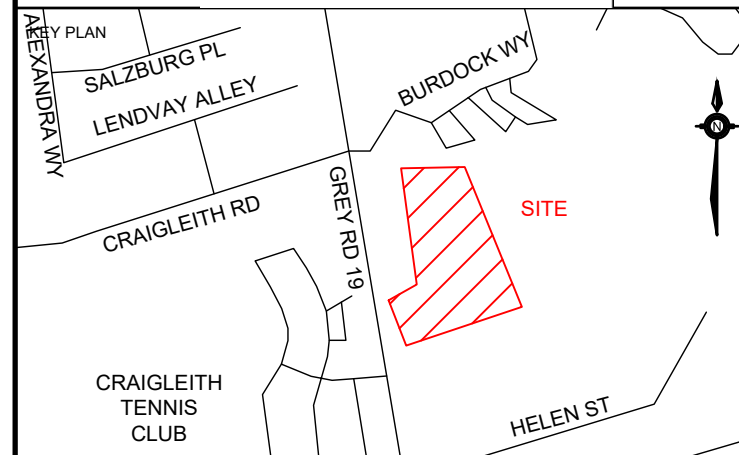

LEGEND	
• [123.45]	PROPOSED GRADE
• [123.45]EX	EXISTING GRADE
	PROPOSED DRAINAGE ARROW/SLOPE
	PROPOSED SWALE
	PROPOSED OVERLAND FLOW ROUTE
	PROPOSED EMBANKMENT (S1 MAX UNLESS OTHERWISE NOTED)
	PROPOSED CHAINLINK FENCE
	EXISTING LIDAR CONTOUR
	PROPOSED CONCRETE SURFACE
	PROPOSED LIGHT DUTY ASPHALT SURFACE
	PROPOSED HEAVY DUTY ASPHALT SURFACE


Y = 4930414.0 X = 553826.6 Z = 181.493

CRAIGLEITH CONCRETE CULVERT UNDER HIGHWAY NO. 26, 0.3 KM NORTHWEST OF JUNCTION OF HIGHWAY NO. 26 WITH BLUE MOUNTAIN PARK ROAD, TABLET IN SOUTH FACE OF CULVERT AT SOUTH END, 6 CM BELOW TOP AND 42 CM EAST OF WEST EDGE OF CULVERT.

PROJECT

LONG-TERM CARE
DEVELOPMENT
TOWN OF THE BLUE MOUNTAINS

WALTERFEDY
TORONTO | CALGARY | **KITCHENER** | HAMILTON
800.685.1378 walterfedy.com

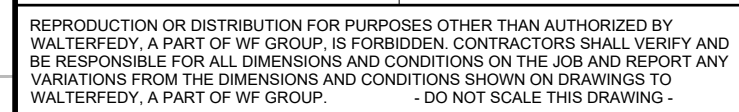

SCALE: 1:250	SHEET NO: C201
DATE: 2026-05-22	
PROJECT NO.: 2026-0316-10	
DRAWN BY: LH	
CHECKED BY: TK	



DATE	ISSUANCE	NO.
2026.05.19	ISSUED FOR ZONING BY-LAW AMENDMENT	
2026.06.30	ISSUED FOR SPA	

	PROPOSED GRADE
	EXISTING GRADE
	PROPOSED DRAINAGE ARROW/SLOPE
	PROPOSED SWALE
	PROPOSED OVERLAND FLOW ROUTE
	PROPOSED EMBANKMENT (3:1 MAX UNLESS OTHERWISE NOTED)
	PROPOSED CHAINLINK FENCE
	EXISTING CONTOUR
	EXISTING LIDAR CONTOUR
	PROPOSED CONCRETE SURFACE
	PROPOSED LIGHT DUTY ASPHALT SURFACE
	PROPOSED HEAVY DUTY ASPHALT SURFACE


Y = 4930414.0 X = 553826.6 Z = 181.493

CRAIGLEITH CONCRETE CULVERT UNDER HIGHWAY NO. 26, 0.3 KM
NORTHWEST OF JUNCTION OF HIGHWAY NO. 26 WITH BLUE MOUNTAIN
PARK ROAD, TABLET IN SOUTH FACE OF CULVERT AT SOUTH END, 60
CM BELOW TOP AND 42 CM EAST OF WEST EDGE OF CULVERT.

PROJECT


LONG-TERM CARE
DEVELOPMENT
TOWN OF THE BLUE MOUNTAINS


WALTERFEDY
TORONTO | CALGARY | **KITCHENER** | HAMILTON
800.685.1378 walterfedy.com

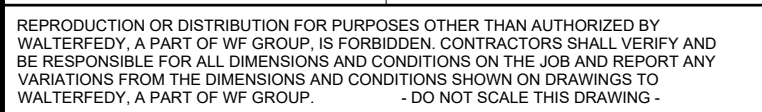

SCALE: 1:250	SHEET NO.: C202
DATE: 2026-05-22	
PROJECT NO.: 2026-0316-10	
DRAWN BY: LH	
CHECKED BY: TK	

1. TOPOGRAPHIC INFORMATION AND LEGAL BOUNDARY DATA OF THE SITE FROM SURVEY BY WATERFEDDY, DATED APRIL 2026.
2. BOREHOLE LOCATIONS AND GEOTECHNICAL INFORMATION FROM CHUNG & VANDER DOELEN ENGINEERING LTD. DATED JUNE 2, 2026.
3. THIS SET OF PLANS SHALL NOT BE USED FOR CONSTRUCTION UNTIL STAMPED BY THE DESIGN ENGINEER AND APPROVED BY THE LOCAL MUNICIPALITY.
4. NO CHANGES ARE TO BE MADE WITHOUT THE APPROVAL OF THE DESIGN ENGINEER.
5. THIS PLAN NOT TO BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE PERMISSION OF WATERFEDDY.
6. THE POSITION OF POLE LINES, CONDUITS, WATERMANS, SEWERS, AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS AND, WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK, THE CONTRACTOR SHALL INFORM THEMSELVES OF THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES AND SHALL ASSUME ALL LIABILITY FOR DAMAGE TO THEM AND THOSE NOT LOCATED PRIOR TO CONSTRUCTION.
7. ANY AREA DISTURBED DURING CONSTRUCTION SHALL BE RESTORED TO ITS ORIGINAL CONDITION OR BETTER TO THE SATISFACTION OF THE CONSULTANT AND AUTHORITY CHARGED WITH THE CONSTRUCTION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE AND/OR DISTURBED PROPERTY WITHIN THE MUNICIPAL RIGHT-OF-WAY TO MUNICIPAL STANDARDS.
8. ALL HEALTH AND SAFETY RELATED SIGNAGE MUST BE POSTED AT THE SITE AS REQUIRED BY APPLICABLE LAW AND BEST MANAGEMENT PRACTICES.
9. AT THE END OF CONSTRUCTION, THE CONTRACTOR SHALL PROVIDE THE CONSULTANT WITH A DIGITAL FILE OF AS-CONSTRUCTED DRAWINGS. THE DRAWINGS MUST REFLECT THE AS-CONSTRUCTED STATUS OF THE PROJECT. NO RECORD OF UNALTERED DESIGN DRAWINGS AND CONTRACT CHANGES WILL NOT BE ACCEPTED.

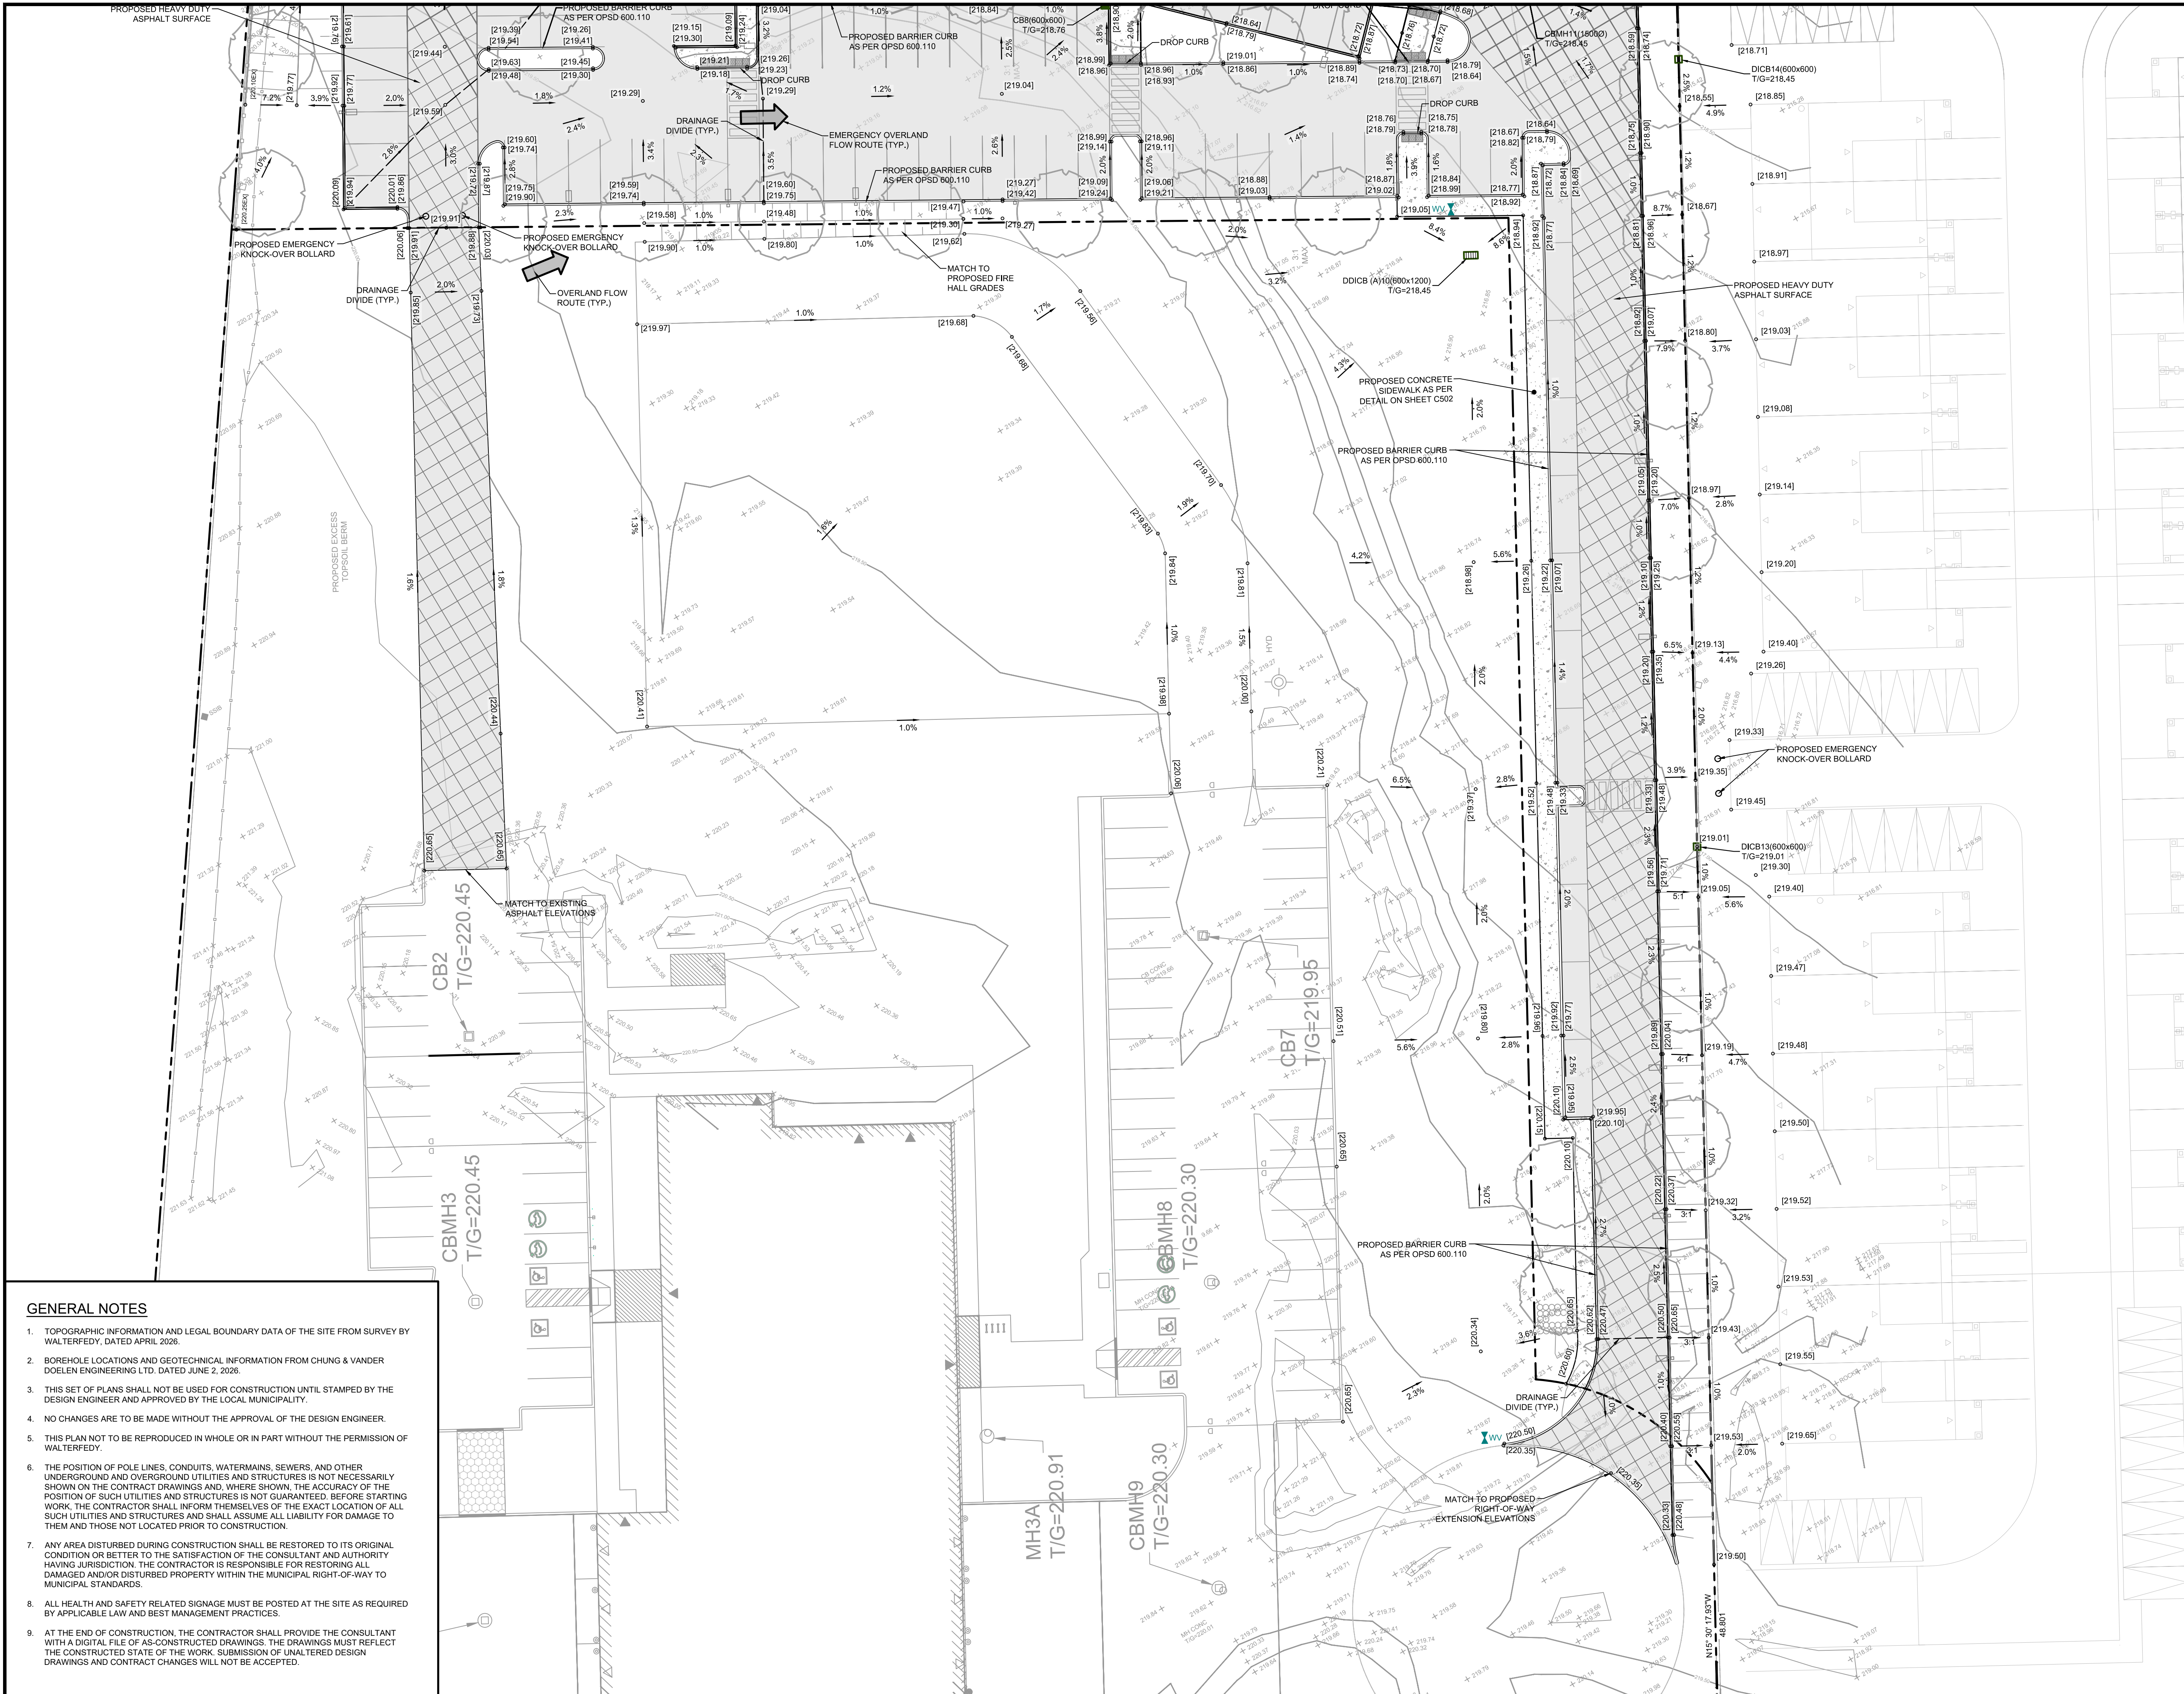



LEGEND	
	CB / DCB
	DICB/DICB
	CBMH / DCBMH
	DICBMH(A/B)
	MH
	MH
	HYD
	WV
	CS
	REDUCER
	EX CKS / DCB
	EX DI
	EX MH
	EX CBMH / DCBMH
	EX SAN MH
	EX HYD
	EX WV
	EX CS
	EX WELL
	PROPOSED SANITARY SEWER/SERVICE
	PROPOSED STORM SEWER/SERVICE
	PROPOSED WATERMAIN SERVICE
	EXISTING SANITARY SERVICE
	EXISTING STORM SERVICE
	EXISTING WATERMAIN
	PROPOSED SUBDRAIN
	PROPOSED LAMP STANDARD
	UP HP
	SIGN
	PR HYDRO TRANSFORMER
	PROPOSED HYDRO TRANSFORMER
	PROPOSED CATCHBASIN / DOUBLE CATCHBASIN
	PROPOSED DITCH INLET CATCHBASIN/DOUBLE CATCHBASIN
	PROPOSED CATCHBASIN MANHOLE / DOUBLE CATCHBASIN MANHOLE
	PROPOSED DITCH INLET CATCHBASIN MANHOLE (TYPE A) / (TYPE B)
	PROPOSED STORM MANHOLE
	PROPOSED SANITARY MANHOLE
	PROPOSED FIRE HYDRANT
	PROPOSED WATERMAIN VALVE
	PROPOSED CURB STOP
	PROPOSED REDUCER
	PROPOSED FIRE DEPARTMENT CONNECTION
	EXISTING CATCHBASIN / DOUBLE CATCHBASIN
	EXISTING DITCH INLET CATCHBASIN
	EXISTING STORM MANHOLE
	EXISTING CATCHBASIN MANHOLE / DOUBLE CATCHBASIN MANHOLE
	EXISTING SANITARY MANHOLE
	EXISTING FIRE HYDRANT
	EXISTING WATERMAIN VALVE
	EXISTING CURB STOP
	EXISTING FIRE DEPARTMENT CONNECTION
	EXISTING WELL

PROJECT LONG-TERM CARE DEVELOPMENT TOWN OF THE BLUE MOUNTAINS

TITLE
SERVICING PLAN (1 OF 2)



REPRODUCTION OR DISTRIBUTION FOR PURPOSES OTHER THAN AUTHORIZED BY
WALTERFEDY, A PART OF WF GROUP, IS FORBIDDEN. CONTRACTORS SHALL VERIFY AND
BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS ON THE JOB AND REPORT ANY
VARIATIONS FROM THE DIMENSIONS AND CONDITIONS SHOWN ON DRAWINGS TO
WALTERFEDY, A PART OF WF GROUP. - DO NOT SCALE THIS DRAWING -


SCALE: 1:250	SHEET NO.: C301
DATE: 2026-05-22	
PROJECT NO.: 2026-0316-10	
DRAWN BY: LH	
CHECKED BY: TK	



1. TOPOGRAPHIC INFORMATION AND LEGAL BOUNDARY DATA OF THE SITE FROM SURVEY BY WATERFEDDY, DATED APRIL 2026.
2. BOREHOLE LOCATIONS AND GEOTECHNICAL INFORMATION FROM CHUNG & VANDER DOELEN ENGINEERING LTD. DATED JUNE 2, 2026.
3. THIS SET OF PLANS SHALL NOT BE USED FOR CONSTRUCTION UNTIL STAMPED BY THE DESIGN ENGINEER AND APPROVED BY THE LOCAL MUNICIPALITY.
4. NO CHANGES ARE TO BE MADE WITHOUT THE APPROVAL OF THE DESIGN ENGINEER.
5. THIS PLAN NOT TO BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE PERMISSION OF WATERFEDDY.
6. THE POSITION OF POLE LINES, CONDUITS, WATERMANS, SEWERS, AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS AND, WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK, THE CONTRACTOR SHALL INFORM THEMSELVES OF THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES AND SHALL ASSUME ALL LIABILITY FOR DAMAGE TO THEM AND THOSE NOT LOCATED PRIOR TO CONSTRUCTION.
7. ANY AREA DISTURBED DURING CONSTRUCTION SHALL BE RESTORED TO ITS ORIGINAL CONDITION OR BETTER TO THE SATISFACTION OF THE CONSULTANT AND AUTHORITY HAVING JURISDICTION. THE CONTRACTOR IS RESPONSIBLE FOR RECONSTRUCTING ALL DAMAGED AND/OR DISTURBED PROPERTY WITHIN THE MUNICIPAL RIGHT-OF-WAY TO MUNICIPAL STANDARDS.
8. ALL HEALTH AND SAFETY RELATED SIGNAGE MUST BE POSTED AT THE SITE AS REQUIRED BY APPLICABLE LAW AND BEST MANAGEMENT PRACTICES.
9. AT THE END OF CONSTRUCTION, THE CONTRACTOR SHALL PROVIDE THE CONSULTANT WITH A DIGITAL FILE OF AS-CONSTRUCTED DRAWINGS. THE DRAWINGS MUST REFLECT THE AS-CONSTRUCTED SITUATION AND NOT BE A REVISION OF UNQUALIFIED DESIGN DRAWINGS AND CONTRACT CHANGES WILL NOT BE ACCEPTED.

Y = 4930414.0 X = 553826.6 Z = 181.493


Y = 4930414.0 X = 553826.6 Z = 181.493

CRAIGLEITH CONCRETE CULVERT UNDER HIGHWAY NO. 26, 0.3 KM NORTHWEST OF JUNCTION OF HIGHWAY NO. 26 WITH BLUE MOUNTAIN PARK ROAD, TABLET IN SOUTH FACE OF CULVERT AT SOUTH END, 60 CM BELOW TOP AND 42 CM EAST OF WEST EDGE OF CULVERT.

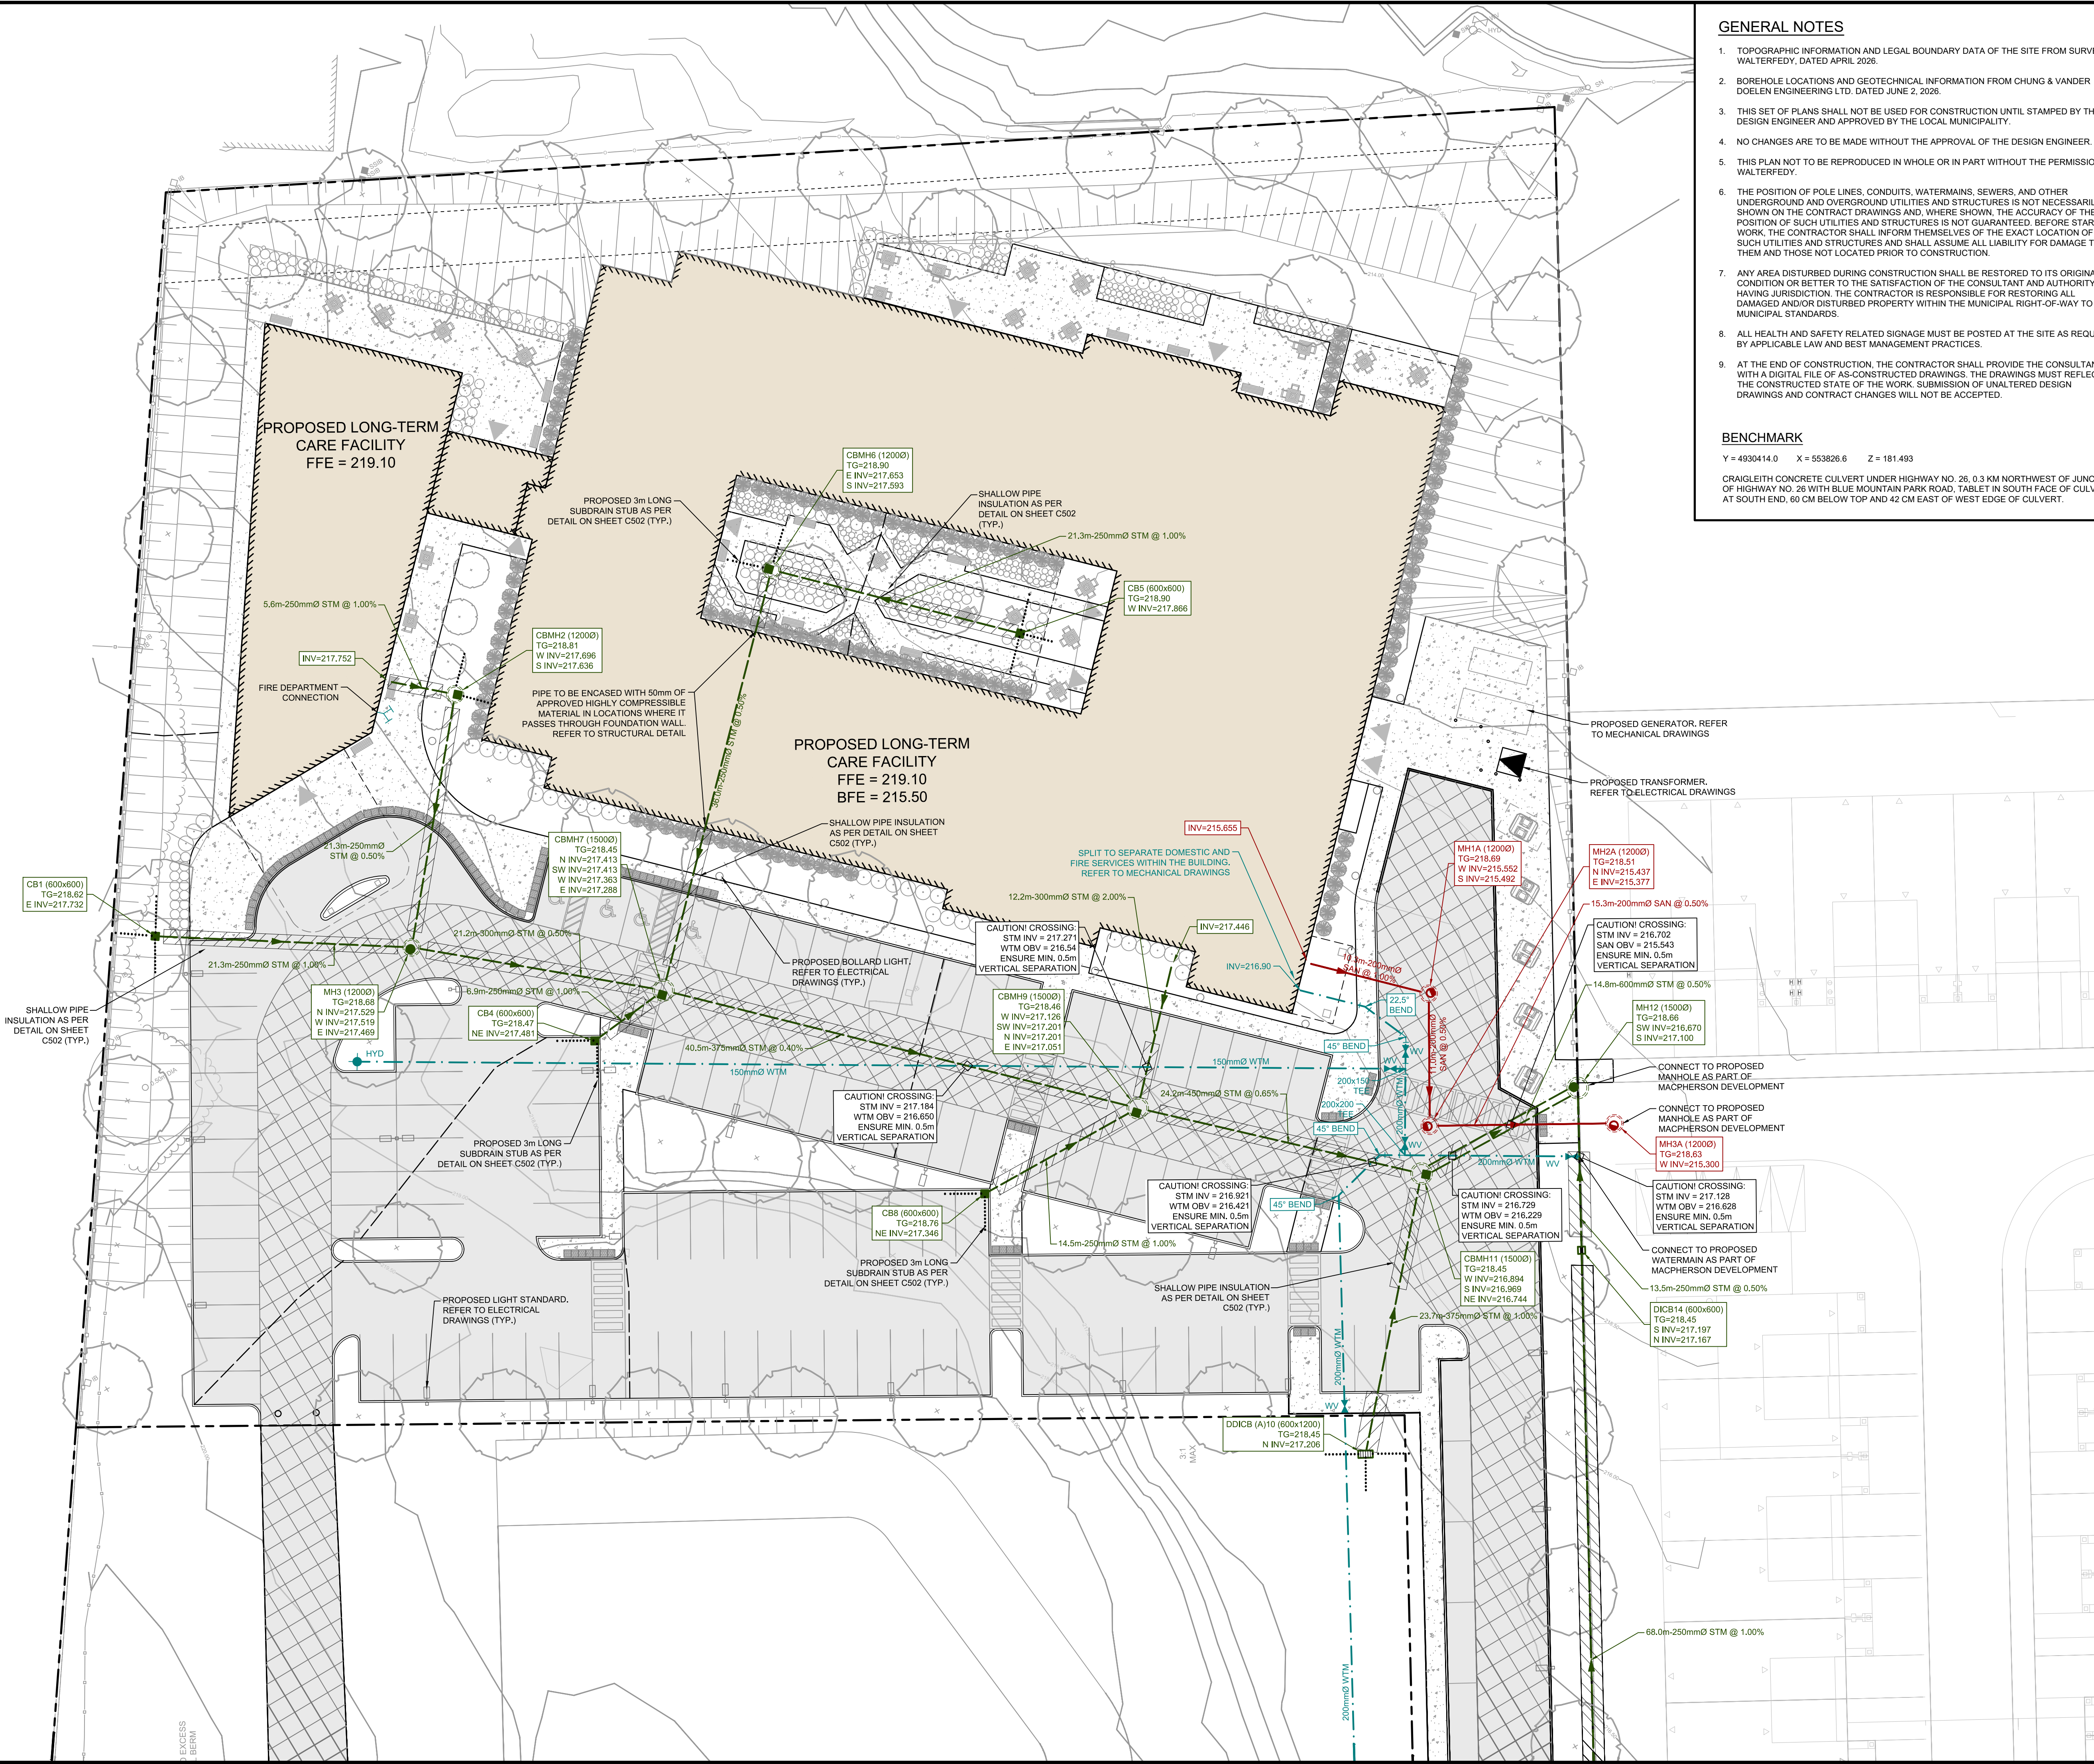

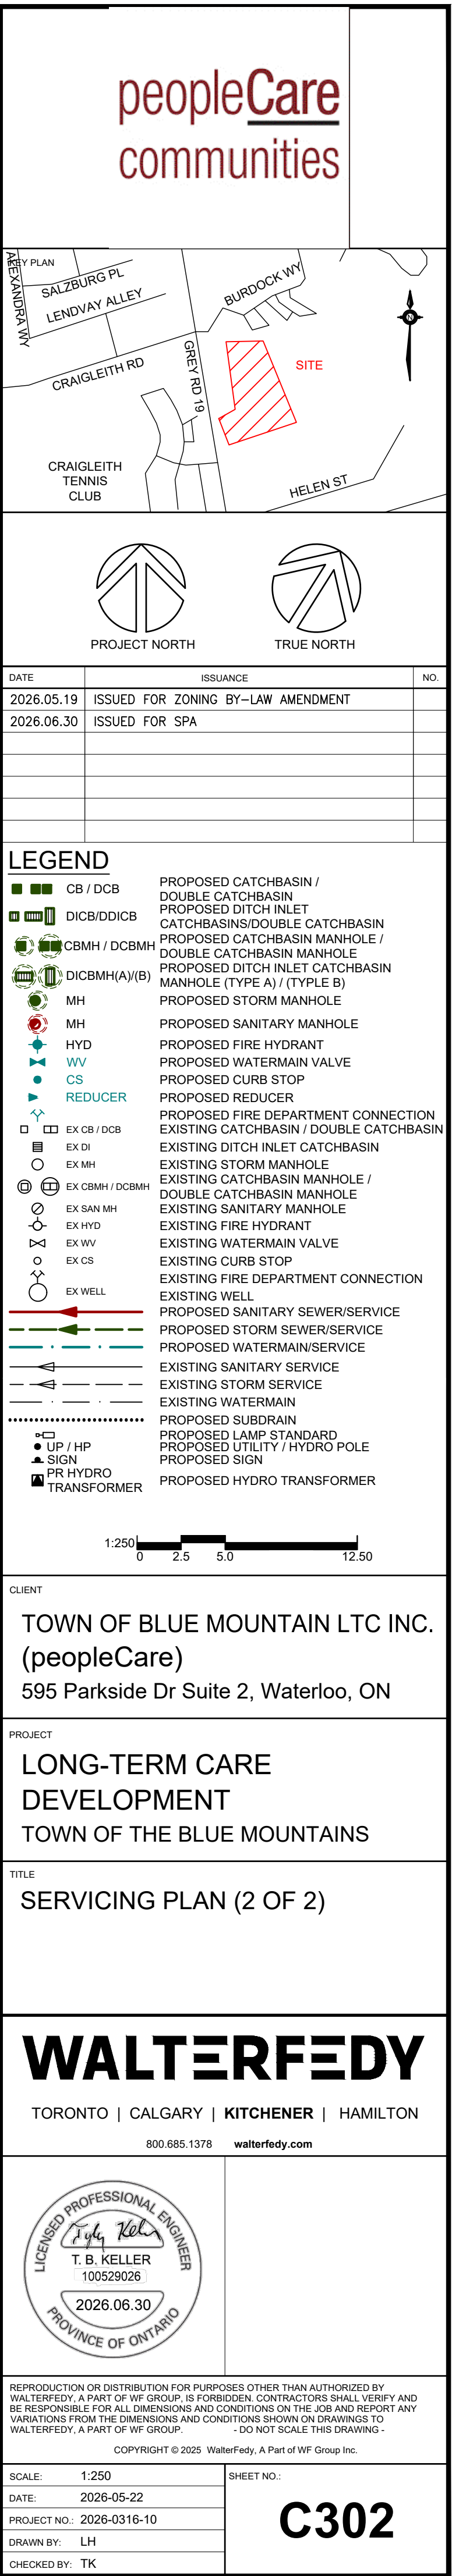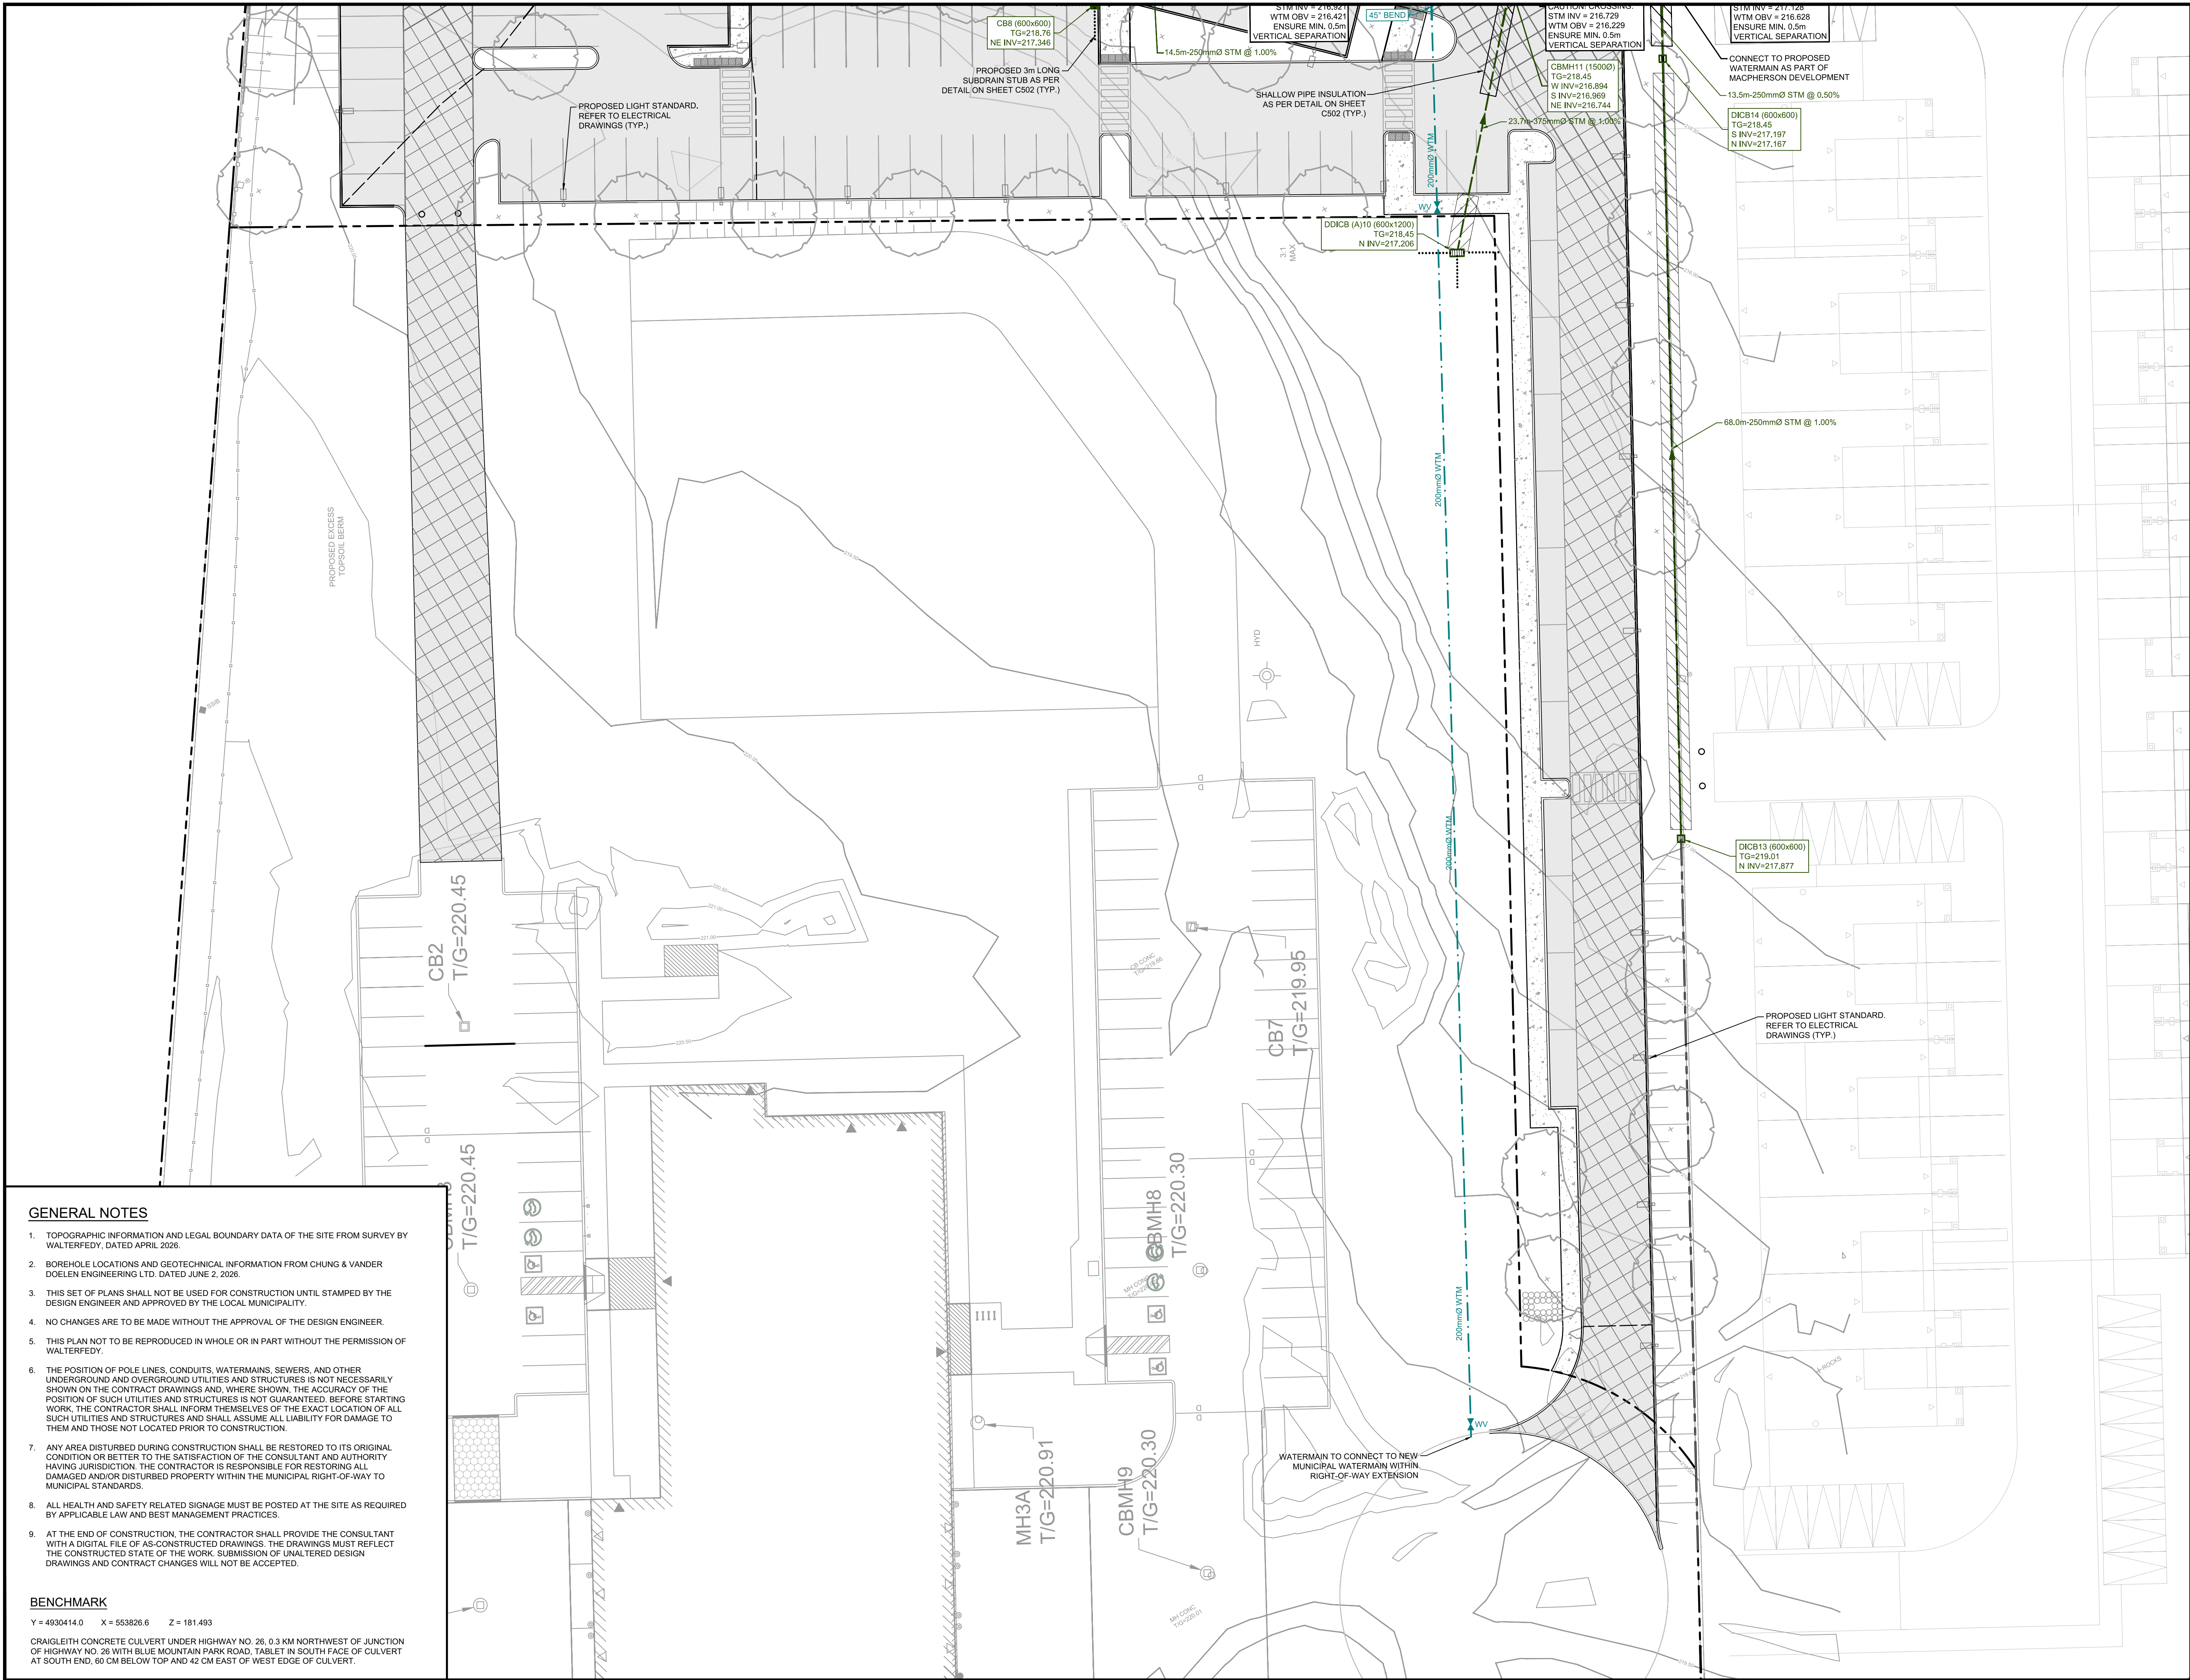

C:\Users\keller\OneDrive\WalterFedy\2026-0316-10_peopleCare-Thru_Blue_Mountains_LTC\Project_Files\105_OVA\105.1_Pkg_Files\2026-0316-10_ESC_PLT_C401_ EROSION & SEDIMENT CONTROL PLAN_Note_Tyler Keller_2026-06-26 3:15:06 PM

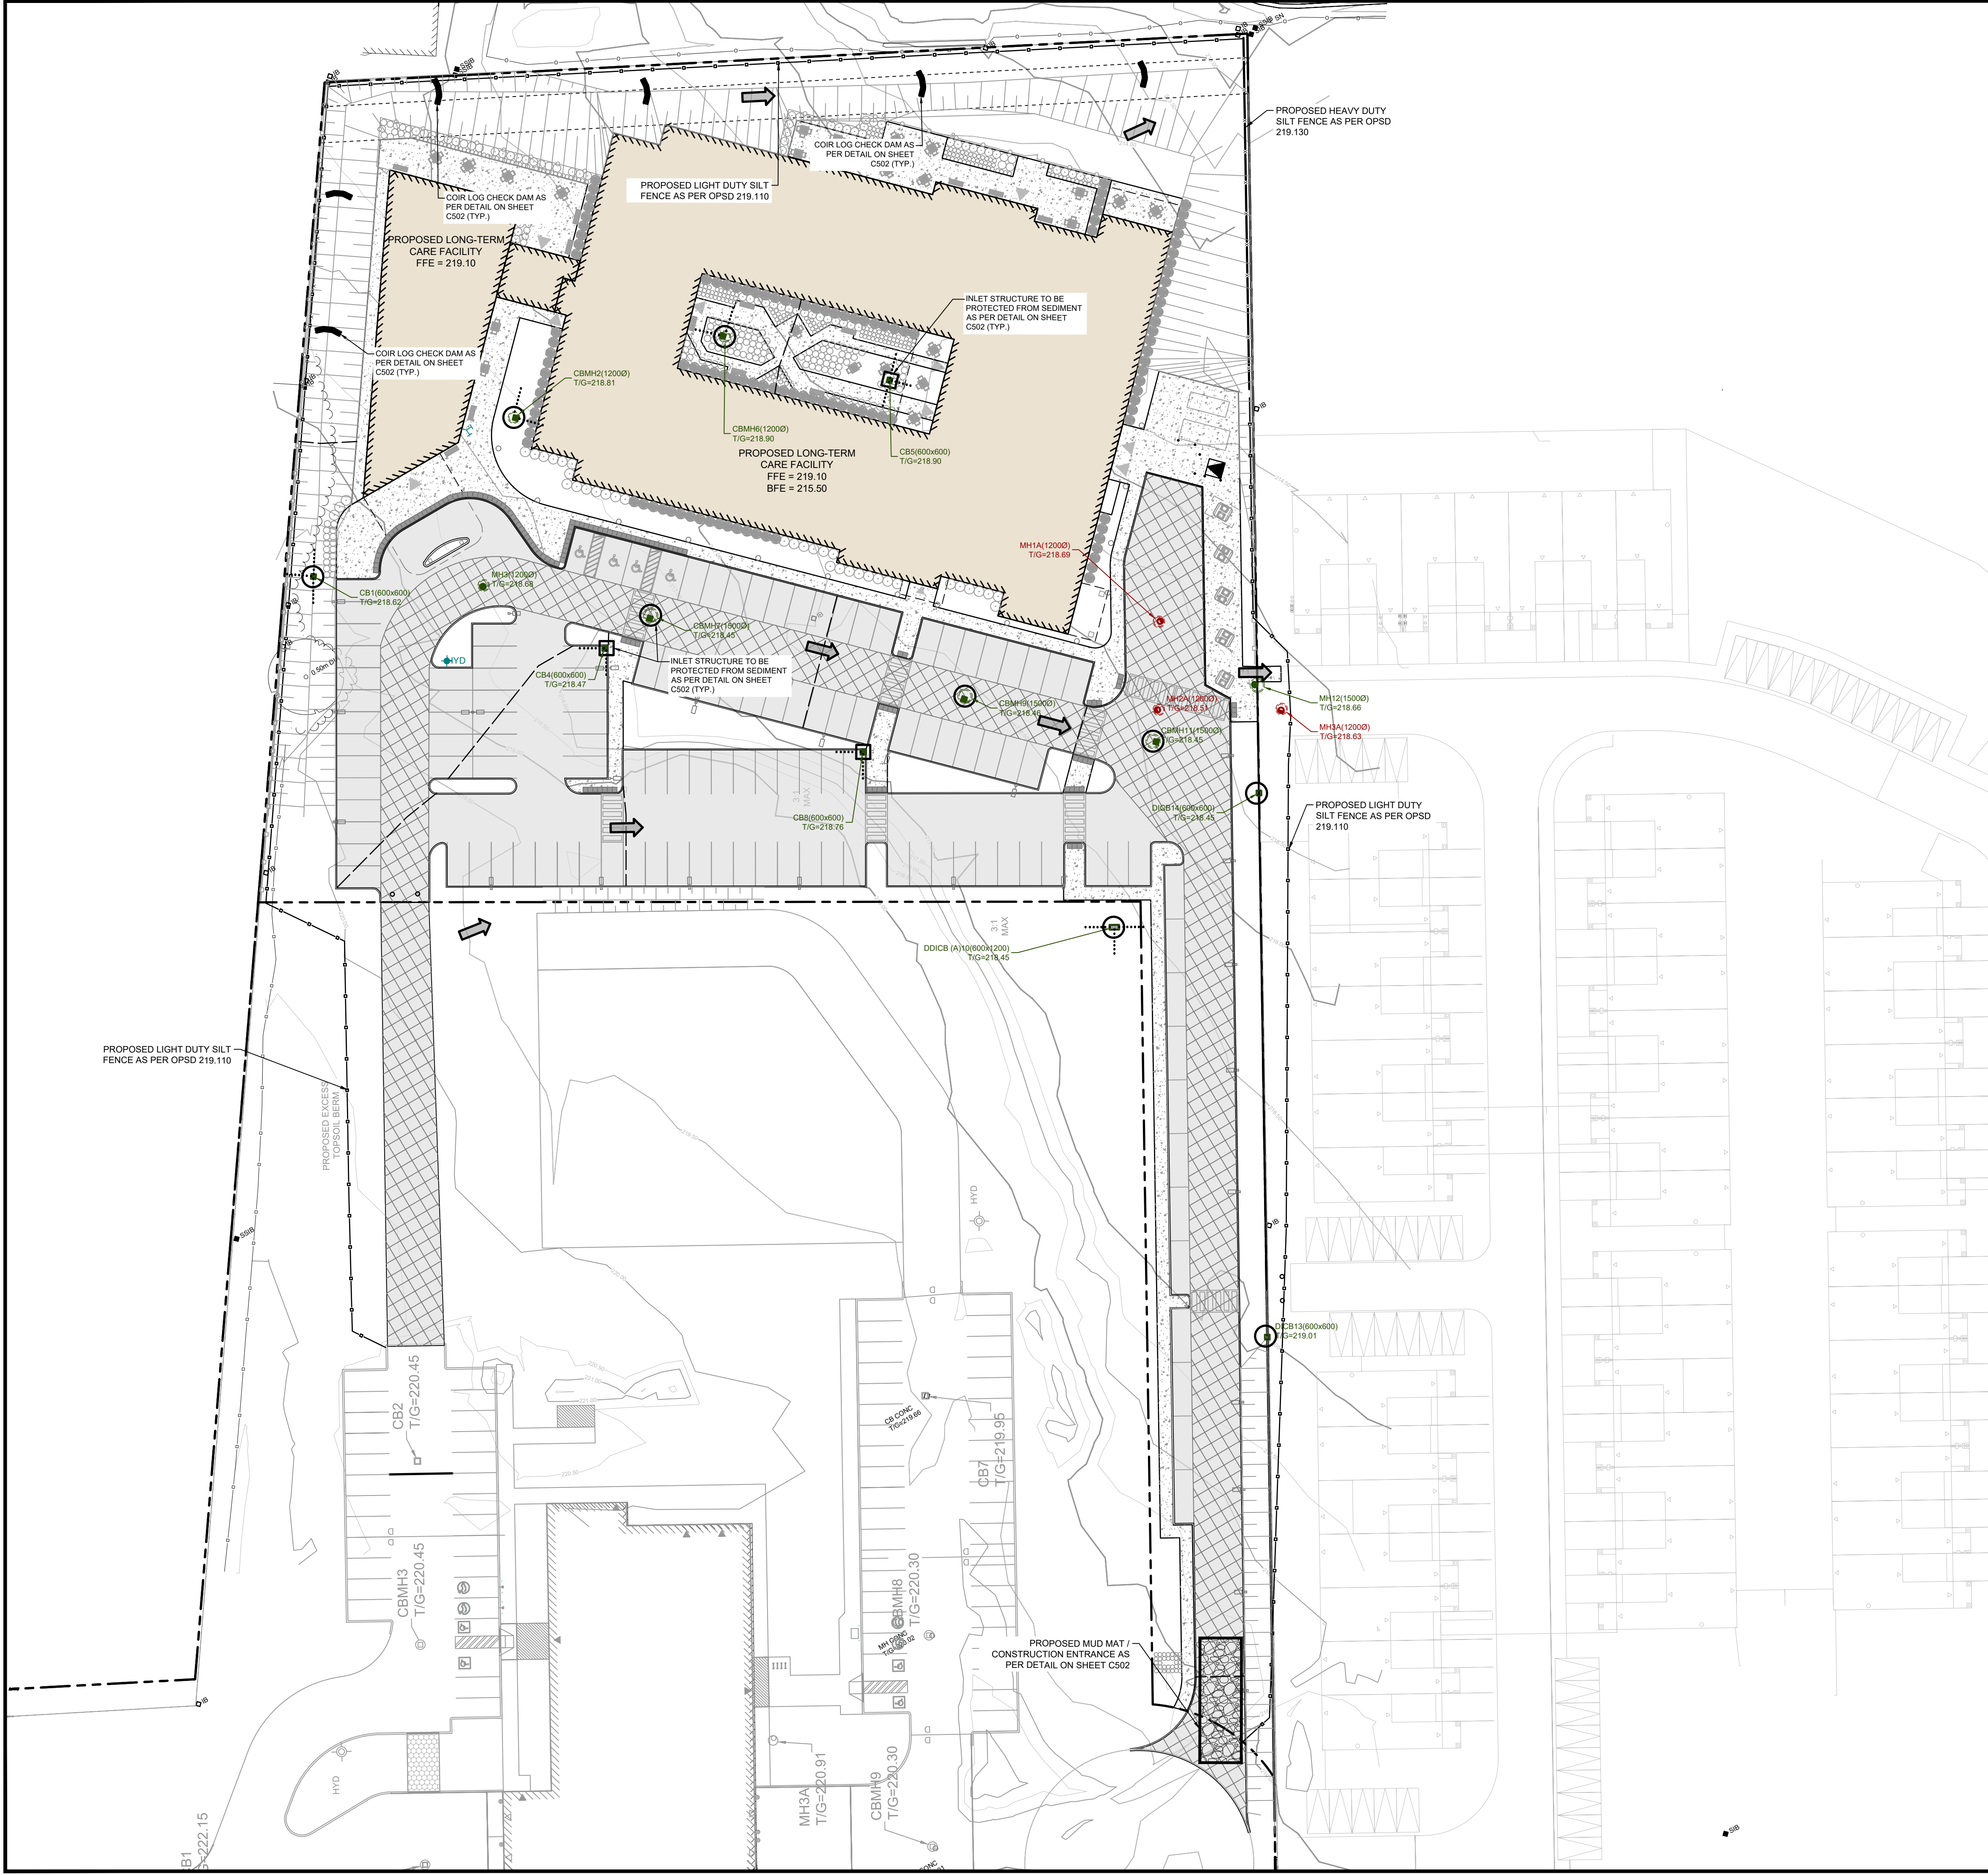

GENERAL NOTES

1. TOPOGRAPHIC INFORMATION AND LEGAL BOUNDARY DATA OF THE SITE FROM SURVEY BY WALTERFEDY, DATED APRIL 2026.
2. BOREHOLE LOCATIONS AND GEOTECHNICAL INFORMATION FROM CHUNG & VANDER DOELEN ENGINEERING LTD. DATED JUNE 2, 2026.
3. THIS SET OF PLANS SHALL NOT BE USED FOR CONSTRUCTION UNTIL STAMPED BY THE DESIGN ENGINEER AND APPROVED BY THE LOCAL MUNICIPALITY.
4. NO CHANGES ARE TO BE MADE WITHOUT THE APPROVAL OF THE DESIGN ENGINEER.
5. THIS PLAN NOT TO BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE PERMISSION OF WALTERFEDY.
6. THE POSITION OF POLE LINES, CONDUITS, WATERMAINS, SEWERS, AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS AND, WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK, THE CONTRACTOR SHALL INFORM THEMSELVES OF THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES AND SHALL ASSUME ALL LIABILITY FOR DAMAGE TO THEM AND THOSE NOT LOCATED PRIOR TO CONSTRUCTION.
7. ANY AREA DISTURBED DURING CONSTRUCTION SHALL BE RESTORED TO ITS ORIGINAL CONDITION OR BETTER TO THE SATISFACTION OF THE CONSULTANT AND AUTHORITY HAVING JURISDICTION. THE CONTRACTOR IS RESPONSIBLE FOR RESTORING ALL DAMAGED AND/OR DISTURBED PROPERTY WITHIN THE MUNICIPAL RIGHT-OF-WAY TO MUNICIPAL STANDARDS.
8. ALL HEALTH AND SAFETY RELATED SIGNAGE MUST BE POSTED AT THE SITE AS REQUIRED BY APPLICABLE LAW AND BEST MANAGEMENT PRACTICES.
9. AT THE END OF CONSTRUCTION, THE CONTRACTOR SHALL PROVIDE THE CONSULTANT WITH A DIGITAL FILE OF AS-CONSTRUCTED DRAWINGS. THE DRAWINGS MUST REFLECT THE CONSTRUCTED STATE OF THE WORK. SUBMISSION OF UNALTERED DESIGN DRAWINGS AND CONTRACT CHANGES WILL NOT BE ACCEPTED.

LEGEND

- PROPERTY LINE
- LEGAL EASEMENT
- BUILDING SETBACK
- STANDARD IRON BAR
- EXISTING LAMP STANDARD
- EXISTING UTILITY POLE
- EXISTING HYDRO POLE
- EXISTING GUY WIRE
- EXISTING SIGN
- EXISTING STORM MANHOLE
- EXISTING SANITARY MANHOLE
- EXISTING FIRE HYDRANT
- EXISTING WATERMAIN VALVE
- EXISTING MAJOR CONTOUR
- EXISTING MINOR CONTOUR
- EXISTING EMBANKMENT
- EXISTING DITCH CENTRELINE
- EXISTING SILT FENCE
- EXISTING CHAINLINK FENCE
- EXISTING ASPHALT
- EXISTING CONCRETE
- EXISTING CURB
- EXISTING GRAVEL
- PROPOSED CATCHBASIN
- PROPOSED CATCHBASIN MANHOLE
- PROPOSED DITCH INLET CATCHBASIN
- PROPOSED STORM MANHOLE
- PROPOSED SANITARY MANHOLE
- PROPOSED FIRE HYDRANT
- PROPOSED HEAVY DUTY SILT FENCE
- PROPOSED LIGHT DUTY SILT FENCE
- PROPOSED MUD MAT
- INLET STRUCTURE PROTECTION
- PROPOSED CHECK DAM

peopleCare
communities

DATE	ISSUANCE	NO.
2026.05.19	ISSUED FOR ZONING BY-LAW AMENDMENT	
2026.06.30	ISSUED FOR SPA	

BENCHMARK

Y = 4930414.0 X = 553826.6 Z = 181.493

CRAIGLEITH CONCRETE CULVERT UNDER HIGHWAY NO. 26, 0.3 KM NORTHWEST OF JUNCTION OF HIGHWAY NO. 26 WITH BLUE MOUNTAIN PARK ROAD, TABLET IN SOUTH FACE OF CULVERT AT SOUTH END, 60 CM BELOW TOP AND 42 CM EAST OF WEST EDGE OF CULVERT.

CLIENT

TOWN OF BLUE MOUNTAIN LTC INC.
(peopleCare)
595 Parkside Dr Suite 2, Waterloo, ON

PROJECT

LONG-TERM CARE
DEVELOPMENT
TOWN OF THE BLUE MOUNTAINS

TITLE

EROSION & SEDIMENT
CONTROL PLAN

WALTERFEDY

TORONTO | CALGARY | KITCHENER | HAMILTON

800.685.1378 walterfedy.com

REPRODUCTION OR DISTRIBUTION FOR PURPOSES OTHER THAN AUTHORIZED BY WALTERFEDY, A PART OF WF GROUP, IS FORBIDDEN. CONTRACTORS SHALL VERIFY AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS ON THE JOB AND REPORT ANY VARIATIONS FROM THE DIMENSIONS AND CONDITIONS SHOWN ON DRAWINGS TO WALTERFEDY, A PART OF WF GROUP. - DO NOT SCALE THIS DRAWING -

COPYRIGHT © 2025 WalterFedy, A Part of WF Group Inc.

SCALE	1:400	SHEET NO.:
DATE	2026-06-26	C401
PROJECT NO.:	2026-0316-10	
DRAWN BY:	LH	
CHECKED BY:	TK	

GENERAL NOTES

1. TOPOGRAPHIC INFORMATION AND LEGAL BOUNDARY DATA OF THE SITE FROM SURVEY BY WALTERFEDY, DATED APRIL 2026.
2. BOREHOLE LOCATIONS AND GEOTECHNICAL INFORMATION FROM CHUNG & VANDER DOELEN ENGINEERING LTD. DATED JUNE 2, 2026.
3. THIS SET OF PLANS SHALL NOT BE USED FOR CONSTRUCTION UNTIL STAMPED BY THE DESIGN ENGINEER AND APPROVED BY THE LOCAL MUNICIPALITY.
4. NO CHANGES ARE TO BE MADE WITHOUT THE APPROVAL OF THE DESIGN ENGINEER.
5. THIS PLAN NOT TO BE REPRODUCED IN WHOLE OR IN PART WITHOUT THE PERMISSION OF WALTERFEDY.
6. THE POSITION OF POLE LINES, CONDUITS, WATERMANS, SEWERS, AND OTHER UNDERGROUND AND OVERGROUND UTILITIES AND STRUCTURES IS NOT NECESSARILY SHOWN ON THE CONTRACT DRAWINGS AND, WHERE SHOWN, THE ACCURACY OF THE POSITION OF SUCH UTILITIES AND STRUCTURES IS NOT GUARANTEED. BEFORE STARTING WORK, THE CONTRACTOR SHALL INFORM THEMSELVES OF THE EXACT LOCATION OF ALL SUCH UTILITIES AND STRUCTURES AND SHALL ASSUME ALL LIABILITY FOR DAMAGE TO THEM AND THOSE NOT LOCATED PRIOR TO CONSTRUCTION.
7. ANY AREA DISTURBED DURING CONSTRUCTION SHALL BE RESTORED TO ITS ORIGINAL CONDITION OR BETTER TO THE SATISFACTION OF THE CONSULTANT AND AUTHORITY HAVING JURISDICTION. THE CONTRACTOR IS RESPONSIBLE FOR RESTORING ALL DAMAGED AND/OR DISTURBED PROPERTY WITHIN THE MUNICIPAL RIGHT-OF-WAY TO MUNICIPAL STANDARDS.
8. ALL HEALTH AND SAFETY RELATED SIGNAGE MUST BE POSTED AT THE SITE AS REQUIRED BY APPLICABLE LAW AND BEST MANAGEMENT PRACTICES.
9. AT THE END OF CONSTRUCTION, THE CONTRACTOR SHALL PROVIDE THE CONSULTANT WITH A DIGITAL FILE OF AS-CONSTRUCTED DRAWINGS. THE DRAWINGS MUST REFLECT THE CONSTRUCTED STATE OF THE WORK. SUBMISSION OF UNALTERED DESIGN DRAWINGS AND CONTRACT CHANGES WILL NOT BE ACCEPTED.

EROSION CONTROL NOTES

1. ALL EROSION CONTROL FENCING, TEMPORARY FILTRATION, MUD MATS AND CHECK DAMS MUST BE INSTALLED BY THE CONTRACTOR AND INSPECTED BY THE CONSULTANT PRIOR TO COMMENCEMENT OF ANY AREA GRADING, EXCAVATING, OR DEMOLITION. CONTRACTOR TO NOTIFY CONSULTANT FOR INSPECTION.
2. ATTACH EROSION CONTROL FENCE TO EXISTING CHAINLINK FENCE WITHIN THE LIMITS OF THE SITE WHERE POSSIBLE.
3. EROSION CONTROL FENCING TO BE PLACED AROUND THE BASE OF ALL STOCKPILES. ALL STOCKPILES TO BE KEPT A MINIMUM OF 2.5m FROM PROPERTY LINES.
4. FILTER FABRIC TO BE TERRAFIX 270R OR APPROVED EQUIVALENT.
5. MUD MATS TO BE PROVIDED ON SITE AT ALL LOCATIONS WHERE CONSTRUCTION VEHICLES EXIT THE SITE. MUD MATS SHALL BE SUPPLIED AS INSTALLED AS PER THE DETAIL ON THIS SHEET. CONTRACTOR TO ENSURE ALL VEHICLES LEAVE THE SITE VIA THE MUD MAT AND THAT THE MAT IS MAINTAINED IN A MANNER TO MAXIMIZE ITS EFFECTIVENESS AT ALL TIMES.
6. ALL DITCH INLET CATCHBASINS, CATCHBASINS AND CATCHBASIN MANHOLES TO HAVE TEMPORARY FILTRATION INSTALLED AND MAINTAINED AS PER THE DETAIL ON THIS SHEET.
7. NO ALTERNATE METHODS OF EROSION CONTROL PROTECTION SHALL BE PERMITTED UNLESS APPROVED BY CONSULTANT AND THE AUTHORITY HAVING JURISDICTION.
8. ALL EROSION CONTROL STRUCTURES TO REMAIN IN PLACE UNTIL ALL DISTURBED GROUND SURFACES HAVE BEEN RE-STABILIZED EITHER BY PAVING OR RESTORATION WITH VEGETATIVE GROUND COVER.
9. THE CONTRACTOR IS RESPONSIBLE FOR REMOVING SEDIMENTS FROM THE PUBLIC ROADWAY AND SIDEWALKS AT THE END OF EACH WORK DAY OR AS DIRECTED BY THE CONSULTANT.
10. ALL EROSION AND SEDIMENT CONTROL MEASURES TO BE INSPECTED BY THE CONTRACTOR AFTER MAJOR RAINFALL EVENTS AND CLEANED OR REPLACED AS REQUIRED TO MEET THEIR INTENDED FUNCTION. SEDIMENTS TO BE REMOVED WHEN ACCUMULATIONS REACH A MAXIMUM OF ONE THIRD (1/3) THE STRUCTURE CAPACITY.
11. THE CONSULTANT SHALL MONITOR SITE DEVELOPMENT TO ENSURE ALL EROSION CONTROLS ARE INSTALLED AND MAINTAINED TO THE TOWN OF THE BLUE MOUNTAINS AND NOTTAWASAGA VALLEY CONSERVATION AUTHORITY REQUIREMENTS. CONTRACTOR TO COMPLY WITH THE CONSULTANT'S INSTRUCTIONS TO INSTALL, MODIFY, OR MAINTAIN EROSION CONTROL WORKS.
12. THIS PLAN TO BE READ IN CONJUNCTION WITH THE EXISTING CONDITIONS PLAN, SITE SERVICING PLAN, GRADING PLAN, LANDSCAPING PLAN, AND THE STORM WATER MANAGEMENT REPORT DATED JUNE 2024.

GRADING NOTES

1. MATCH EXISTING GRADES AT ALL PROPERTY LINES AND/OR LIMITS OF CONSTRUCTION EXCEPT WHERE PROPOSED GRADES ARE NOTED.
2. MANAGEMENT OF EXCESS MATERIALS SHALL BE IN ACCORDANCE WITH OPSS 180. ENVIRONMENTALLY IMPACTED SOILS, WHERE AND WHEN ENCOUNTERED, SHALL BE MANAGED ON SITE AS REQUIRED UNTIL SUCH TIME THAT LABORATORY TESTING RESULTS HAVE CONFIRMED THE NATURE OF THE IMPACTS AND A SUITABLE DISPOSAL METHOD.
3. SURPLUS MATERIAL OF ALL TYPES NOT REQUIRED FOR BACKFILL, GRADING OR LANDSCAPING SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND BE REMOVED FROM THE SITE AS DIRECTED BY THE CONSULTANT. THE COSTS OF ALL OFFSITE DISPOSAL SHALL BE BORNE BY THE CONTRACTOR UNLESS A SPECIFIC PROVISION IS MADE IN THE CONTRACT DOCUMENTS FOR PAYMENT FROM DISPOSAL OF A SPECIFIC SURPLUS MATERIAL.
4. MATERIALS TO BE REMOVED SHALL BE NEATLY SAW-CUT ALONG ITS LIMITS, IN ADVANCE OF THE REMOVAL. THE LIMITS OF REMOVAL SHALL BE AS NOTED ON THE PLANS UNLESS AN EXTENSION OR REDUCTION OF THE MATERIAL TO BE REMOVED IS APPROVED IN ADVANCE BY THE CONSULTANT. AS SUCH, THE COSTS OF ANY OVER-EXCAVATION NOT APPROVED IN ADVANCE SHALL BE THE FINANCIAL RESPONSIBILITY OF THE CONTRACTOR. THIS RESPONSIBILITY SHALL ALSO EXTEND TO RESTORATION OR REPLACEMENT OF DISTURBED FEATURES AND SURFACES DUE TO UNAUTHORIZED EXCAVATION.
5. ALL FILL PLACED ON SITE SHALL BE COMPACTED TO 100% SPMD UNLESS OTHERWISE RECOMMENDED BY THE GEOTECHNICAL ENGINEER OR ON THE DRAWINGS AND IN THE SPECIFICATIONS). ALL MATERIAL SHALL BE PLACED IN LAYERS NOT EXCEEDING 200mm LIFTS EXCEPT WHERE UNDER PAVING, AND WALKS WHEN LAYERS SHALL BE 150mm MAX.
6. MAXIMUM SLOPE IN GRASSED AREAS TO BE 3:1. SLOPES GREATER THAN 3:1 TO BE LANDSCAPED WITH LOW MAINTENANCE GROUND COVER. MINIMUM SLOPE IN GRASSED AREAS TO BE 1%. GRASS SWALES WITH A SLOPE LESS THAN 1% TO BE UNDERLAIN WITH A FRENCH DRAIN.
7. FINISH GRADE AT FOUNDATION WALLS TO BE MINIMUM 150mm BELOW THE TOP OF FOUNDATION WALL/BRICK LINE UNLESS SPECIFIED OTHERWISE ON THE DRAWINGS.
8. CONTRACTOR TO PROVIDE POSITIVE DRAINAGE ON ALL SURFACES TO THE APPROPRIATE OUTLET STRUCTURE. AREAS OF PONDING CAUSED BY CONSTRUCTION EROSION WILL BE REPAIRED BY THE CONTRACTOR TO THE SATISFACTION OF THE CONSULTANT AT THE CONTRACTORS EXPENSE.
9. SHOULD THE NATURE OF THE SOIL AT THE DEPTH INDICATED PROVE UNSATISFACTORY AS DETERMINED BY THE GEOTECHNICAL ENGINEER, THE EXCAVATION DOWN TO SUCH A DEEPER LEVEL AS THE GEOTECHNICAL ENGINEER MAY REQUIRE UNTIL A SATISFACTORY BEARING STRATUM IS REACHED.
- 9.1. ALL EXTRA DEPTHS OF EXCAVATION AND FILLING MUST HAVE THEIR AREA AND VOLUME DOCUMENTED BY AN INDEPENDENT INSPECTION AND TESTING COMPANY OR THE CONSULTANT TO QUALIFY FOR PAYMENT.
- 9.2. QUANTITIES USED FOR PAYMENT OF EXCAVATION AND FILLING AT EXTRA DEPTHS TO BE DETERMINED BY THE CONSULTANT.

GENERAL SERVICING

1. ALL WORK TO BE COMPLETED IN ACCORDANCE WITH THE REGULATIONS SET OUT BY THE MUNICIPALITY HAVING JURISDICTION.
2. RIGID PIPE BEDDING: CLASS 'B' AS PER OPSD 802.030 (EARTH EXCAVATION, TYPE 1 OR 2 SOIL), OPSD 802.031 (EARTH EXCAVATION, TYPE 3 SOIL), OPSD 802.032 (EARTH EXCAVATION, TYPE 4 SOIL), OPSD 802.033 (ROCK EXCAVATION), OPSD 802.034 (ORIGINAL GROUND), AS PER GEOTECHNICAL REPORT
3. FLEXIBLE PIPE BEDDING: AS PER OPSS 401, OPSD 802.010 (EARTH)
4. NATIVE OR GRANULAR FILL AS PER THE GEOTECHNICAL REPORT SHALL BE DEPOSITED IN THE TRENCH, FOR THE FULL WIDTH OF THE TRENCH, COMPACTED TO 98% STANDARD PROCTOR MAXIMUM DRY DENSITY IN LAYERS NOT OVER 300mm DEPTH, EXCEPT WHERE UNDER PAVING, AND WALKS WHEN LAYERS SHALL BE 150mm MAX.
5. SITE SERVICING CONTRACTOR TO TERMINATE ALL SERVICES 1.0m FROM FOUNDATION WALL AND COORDINATE WITH THE GENERAL OR MECHANICAL CONTRACTOR AS REQUIRED TO FACILITATE THE CONNECTION.
6. WHEN BELL AND SPIGOT PIPE IS LAID, THE BELL END OF THE PIPE SHALL BE LAID UPGRADE.
7. PIPE SHALL BE KEPT CLEAN AND DRY AS WORK PROGRESSES. THE TRENCH SHALL BE KEPT DRY.
8. A REMOVABLE WATERTIGHT BULKHEAD SHALL BE INSTALLED DAILY AT THE OPEN END OF THE LAST PIPE LAID.
9. PIPE SHALL NOT BE LAID UNTIL THE PRECEDING PIPE JOINT HAS BEEN COMPLETED AND THE PIPE IS BEDDED AND SECURED IN PLACE.
10. ALL PIPE ENDS SHALL BE THOROUGHLY CLEANED PRIOR TO THE INSTALLATION OF GASKETS. ALL GASKETS TO BE LUBRICATED PRIOR TO BEING INSTALLED OR AS RECOMMENDED BY THE PIPE MANUFACTURER.
11. A TEMPORARY LOCATION MARKER 50x75mm SHALL BE PLACED AT THE END OF ALL CAPPED SERVICE CONNECTIONS. THE MARKER SHALL BE PLACED 300mm ABOVE THE PLUGGED END OF THE SERVICE PIPE, CUT AT LEAST 500mm ABOVE THE FINISHED GRADE, AND MARKED WITH BRIGHT PAINT.
12. ALL MANHOLES, BASINS, CHAMBERS ETC. TO BE INSTALLED LEVEL AND PLUMB TO THE SATISFACTION OF THE CONSULTANT.

STORM AND SANITARY SEWER

1. POLYVINYL CHLORIDE (PVC) PIPE AND FITTINGS: SMOOTH PROFILES, TO OPSS 1841 AND CSA B182.2, WITH SEPARATE GASKET AND INTEGRAL BELL SYSTEM, IN 6.0m NOMINAL LENGTHS AS FOLLOWS:
 - 1.1. 100-150mm OD: SDR28 PVC, WITH 625 kPa STIFFNESS.
 - 1.2. 200mm OD AND LARGER: SDR35 PVC WITH 320 kPa STIFFNESS.
2. SUBSURFACE DRAINAGE PIPE AND FITTINGS: TO OPSS 405, PERFORATED PVC PIPE TO OPSS 1841 OR PE PIPE TO OPSS.MUNI 1840, TO CAN/CSA-B182.1; COMPLETE WITH KNITTED SOCK GEOTEXTILE AS REQUIRED (TERRAFIX 270R OR EQUIVALENT).
3. CORRUGATED STEEL PIPE (CSP): TO OPSS 1801 AND CSA G401, COMPLETE WITH COUPLINGS, NEOPRENE GASKETS, BENDS AND OTHER FITTINGS, JOINTING TO BE 2-PIECE BAND WITH ANGLES COMPLETE WITH NEOPRENE GASKETS FOR NON-PERFORATED PIPE.
4. NON-REINFORCED CONCRETE SEWER PIPE AND FITTINGS: TO OPSS 1820, CAN/CSA-A257 AND ASTM C14.
5. REINFORCED CONCRETE SEWER PIPE AND FITTINGS - CIRCULAR: TO OPSS.MUNI 1820, CAN/CSA-A257 AND ASTM C76.
6. MANHOLES AND CATCHBASIN MANHOLES TO BE PRECAST 1200mm DIAMETER WITH ALUMINUM STEPS AT 300mm SPACING AS PER OPSD 701.010 UNLESS SPECIFIED OTHERWISE.
7. CATCHBASINS TO BE 600mm SQUARE PRECAST AS PER OPSD 705.010.
8. CATCHBASIN MANHOLES AND CATCHBASINS TO HAVE A MINIMUM 600mm DEEP SUMP.
9. MANHOLE AND CATCHBASIN, FRAMES, GRATES, CASTINGS, LIDS TO BE AS PER OPSS 1850.
10. CAST IRON FRAMES AND COVERS OR GRATES- STORM SEWERS: TO OPSS 1850 AND OPSD 400.020, OPSD 401.010 (A, CLOSED).
11. CAST IRON FRAMES AND COVERS OR GRATES - SANITARY SEWERS: TO OPSS 1850, OPSD 401.010 (A, CLOSED).
12. ALL SANITARY MANHOLES LOCATED IN STORM WATER PONDING AREAS TO HAVE WATERTIGHT FRAME AND COVERS AS PER OPSD 401.030
13. STORM SEWERS AND SERVICES TO HAVE MINIMUM 1.5m COVER TO TOP OF PIPE. WHERE COVER TO TOP OF PIPE IS DEFICIENT, CONTRACTOR SHALL INSTALL SHALLOW BURIED SEWER PIPE IN ACCORDANCE WITH APPLICABLE 'SEWER PIPE INSULATION DETAIL' INDICATED IN DRAWING DETAILS.
14. SANITARY SEWERS AND SERVICES TO HAVE A MINIMUM 2.8m COVER TO TOP OF PIPE. WHERE COVER TO TOP OF PIPE IS DEFICIENT, CONTRACTOR SHALL INSTALL SHALLOW BURIED SEWER PIPE IN ACCORDANCE WITH APPLICABLE 'SEWER PIPE INSULATION DETAIL' INDICATED IN DRAWING DETAILS.
15. ALL PIPES, TO BE INSTALLED FLUSH WITH THE INSIDE WALLS OF THE STRUCTURE AND PARGED TO A SMOOTH FINISH.
16. ALL MANHOLES TO BE PRE-BENCHED OR BENCHMARKED WITH 30MPa CONCRETE AS PER OPSD 701.021. BENCHMARKING SHALL EXTEND TO THE SPRING LINE OF LARGEST PIPE IN THE MANHOLE AND SHALL HAVE A SLOPE OF 1:8.
17. ALL STRUCTURES ARE TO BE INSTALLED WITH FROST STRAPS IN ACCORDANCE WITH OPSD 701.100. FROST STRAPS SHALL BE CONTINUOUS AND EXTEND TO THE BOTTOM OF THE MAINTENANCE HOLE OR A MINIMUM OF 4m BELOW GRADE.
18. CONTRACTOR TO SUPPLY AND PAY FOR CCTV INSPECTION OF ALL SEWER LINES AND STRUCTURES.
19. ACCEPTANCE OF SEWER LINES AND STRUCTURES SHALL BE MADE AFTER THE CONSULTANT HAS REVIEWED THE CCTV DOCUMENTATION AND VIDEOS, AND EXPRESSED IN WRITING THAT THE SEWER LINES AND STRUCTURES ARE ACCEPTABLE.
20. IF CCTV INSPECTIONS SHOW ADDITIONAL CLEANING IS REQUIRED, CLEAN AND RE-INSPECT THE SEWER UNTIL ACCEPTED BY THE CONSULTANT.
21. A MINIMUM OF ONE (1) AND MAXIMUM OF THREE (3) ADJUSTMENT UNITS SHALL BE INSTALLED ON EACH STRUCTURE TO A MINIMUM HEIGHT OF 75mm AND MAXIMUM OF 300mm. THE FIRST ADJUSTMENT UNIT SHALL BE LAID IN A FULL BED OF MORTAR AND ALIGNED WITH THE OPENING IN THE STRUCTURE. SUCCESSIVE ADJUSTMENT UNITS SHALL BE LAID PLUMB TO THE FIRST ADJUSTMENT UNIT AND SEALED ACCORDING TO MANUFACTURER'S RECOMMENDATIONS. FRAMES WITH GRATES OR COVERS SHALL BE SET IN A FULL BED OF MORTAR ON THE ADJUSTMENT UNITS AND SUPPORTED USING SHIMS. ROCKS, STONES AND DEBRIS WILL NOT BE PERMITTED FOR USE AS SHIMS.

WATERMANS

1. POLYVINYL CHLORIDE (PVC) PIPE: MANUFACTURED TO CAST IRON OD (CIOD); COLOUR CODED BLUE, WITH INTEGRAL WALL THICKENED BELL DESIGNED FOR JOINT ASSEMBLY USING AN ELASTOMERIC GASKET CONFORMING TO ASTM D3139 AND CSA B137.3, TO CSA B137.3, COMPLETE WITH TRACER WIRE.
 - 1.1. 100 TO 300mm: TO AWWA C900, DR 18, IPEX OR APPROVED EQUAL.
2. MOLECULARLY ORIENTED POLYVINYL CHLORIDE (PVCO) PIPE: MANUFACTURED TO CIOD; COLOUR CODED BLUE, BIAXIALLY ORIENTED, WITH INTEGRAL WALL THICKENED BELL DESIGNED FOR JOINT ASSEMBLY USING AN ELASTOMERIC GASKET CONFORMING TO ASTM D3139 AND CSA B137.3.1, COMPLETE WITH TRACER WIRE.
 - 2.1. 100 TO 300mm: TO AWWA C909, PC 1620 kPa, BIONAX OR APPROVED EQUAL.
3. ALL WATER SERVICING TO HAVE MINIMUM 1.7m COVER.
4. ALL WATER SERVICING PROVIDING FIRE FLOWS MUST BE PRESSURE TESTED TO 200 PSI AS PER THE OBC PLUMBING CODE.
5. FITTINGS: FOR POLYVINYL CHLORIDE (PVC) AND MOLECULARLY ORIENTED POLYVINYL CHLORIDE (PVCO) PIPE SHALL BE EITHER:
 - 5.1. GRAY IRON ACCORDING TO AWWA C110A21.10.
 - 5.2. DUCTILE IRON ACCORDING TO C110A21.10 OR AWWA C153 AND SHALL BE CEMENT LINED ACCORDING TO AWWA C104A21.4.
 - 5.3. INJECTION MOULDED POLYVINYL CHLORIDE, BLUE IN COLOUR AND ACCORDING TO AWWA C907 AND CSA B137.2.
 - 5.4. PREFABRICATED POLYVINYL CHLORIDE, BLUE IN COLOUR AND ACCORDING TO AWWA C905 AND CSA B137.3.
6. JOINT RESTRAINTS:
 - 6.1. FOR PVC PIPE AND FITTINGS: TO ASTM F1674 AND AWWA C111, SERRATED RING TYPE; FOR PUSH ON JOINTS UNIFLANGE (SERIES 1300, 1350 & 1360), EBAA (SERIES 1600, 2500 & 2800) OR CLOW (SERIES 300 & 350); OR WEDGE ACTION TYPE AS MANUFACTURED BY EBAA (SERIES 2000RV), OR UNIFLANGE (SERIES 1500) AND STAR STARGRIP 4000, 4100P.
 - 6.2. FOR PVCO PIPE (AWWA C909) AND FITTINGS: SERRATED RING TYPE; FOR PUSH ON JOINTS UNIFLANGE (SERIES 1360), EBAA (SERIES 2500); WEDGE ACTION TYPE AS MANUFACTURED BY CLOW (SERIES 2000 TUF GRIP), STAR (STARGRIP 3500).
 - 6.3. ALL MECHANICAL JOINTS IN TEMPORARY AND PERMANENT CONNECTIONS TO INCLUDE MECHANICAL JOINT RESTRAINTS.
 - 6.4. WATERMAIN FITTINGS WHICH CHANGE DIRECTIONS VERTICALLY OR HORIZONTALLY TO BE FULLY RESTRAINED BY MECHANICAL JOINT RESTRAINT OR THRUST BLOCKS (OPSD 1103.01 AND 1103.02). THREADED ROD WILL NOT BE PERMITTED.
 - 6.5. WATERMAIN FITTINGS TO BE SUPPLIED WITH MECHANICAL JOINT RESTRAINTS. FOR WATERMAIN PIPE SIZES 150mmØ OR LESS ALL PIPE JOINTS TO BE RESTRAINED WITHIN 5.0m FROM ALL FITTINGS, IN EACH DIRECTION, UNLESS SHOWN OTHERWISE ON THE CONTRACT DRAWINGS. FOR WATERMAIN PIPE SIZES GREATER THAN 150mmØ ALL PIPE JOINTS TO BE RESTRAINED WITHIN 10.0m FROM ALL FITTING, IN EACH DIRECTION, UNLESS SHOWN OTHERWISE ON THE CONTRACT DRAWINGS. ALL TEES TO HAVE MINIMUM 2.0m solid PIPE LENGTH ON EACH RUN OF THE TEE, OR PROVIDE A THRUST BLOCK PER OPSD 1103.010.
7. TRACER WIRE:
 - 7.1. T.W.U. #10 GAUGE SOLID COPPER WIRE.
 - 7.2. PVC WATERMAIN SHALL HAVE SOLID COPPER, AWG #10 TRACER WIRE STRAPPED TO TOP AT 5.0m INTERVALS. TRACER WIRE SHALL BE BROUGHT TO THE SURFACE AT ALL HYDRANTS AND CONNECTED TO THE LOWER FLANGE OF THE HYDRANT.
 - 7.3. DO NOT CONNECT THE TRACER WIRE ON NON-METALLIC SYSTEMS TO NEW OR EXISTING METALLIC WATERMAIN PIPING AND/OR ASSOCIATED FITTINGS.
 - 7.4. ALL CONNECTIONS MADE USING DRYCONN WATERPROOF CONNECTIONS OR EQUIVALENT.
8. WATERMAIN VALVES, 100mm AND LARGER, SHALL BE AS PER AWWA C509-MUELLER A2360-23 OR APPROVED EQUIVALENT (OPEN LEFT) INCLUDING VALVE BOX AND 2.3kg ANODE.
9. HYDRANTS:
 - 9.1. CONFORM TO AWWA C502 FOR DRY-BARREL HYDRANTS, OSPD 1105.010 AND PAINTED CHROME YELLOW.
 - 9.2. SHALL BE INSTALLED WITH TWO 65mm HOSE NOZZLES AT 180 DEGREES AND A 100mm ULC APPROVED STORTZ CONNECTION; 32mm SQUARE OPERATING NUT, OPEN COUNTER-CLOCKWISE AND HAVE MECHANICAL JOINT END, COMPLETE WITH A MAXIMUM 10m LONG AND 150mm DIAMETER LEAD, 150mm GATE VALVE, ANCHOR TEE, VALVE AND BOX PROVIDED IN ACCORDANCE WITH THE TOWN OF THE BLUE MOUNTAINS ENGINEERING STANDARDS.
10. SERVICE PIPE:
 - 10.1. SERVICES 100mm OR GREATER: PVC CLASS 150 TO CSA B137.3.
11. ANODES TO BE PROVIDED AS REQUIRED BY THE AUTHORITY HAVING JURISDICTION. ANODES TO BE AT LEAST 1.0m AWAY FROM THE WATER SYSTEM APPURTENANCES AND AS DEEP AS THE BOTTOM OF THE APPURTENANCES, AND AT LEAST 1.0m APART FROM ANY OTHER ANODES.
 - 11.1. HYDRANTS - 10.9kg ZINC ANODE CONNECTED TO BOTTOM OF HYDRANT BOOT BUT
 - 11.2. RESTRAINTS, VALVES AND METALLIC FITTINGS - 5.4kg ANODE
 - 11.3. CONNECTIONS TO EXISTING IRON WATERMANS - 14.5kg MAGNESIUM ANODE
12. PETROLATUM TAPE SYSTEMS: TO BE COMPRISED OF THREE COMPONENTS: PASTE, MASTIC, AND TAPE THAT MEET AWWA C217-09, SUPPLIED BY DENSO NORTH AMERICA INC. OR PETRO COATING SYSTEMS LTD. OR RUSTROL SYSTEMS (INTERPROVINCIAL CORROSION CONTROL COMPANY LTD.). ONLY MATERIAL FROM SUPPLIERS LISTED SHALL BE USED. AT NO TIME SHALL MATERIALS FROM EITHER SYSTEM BE UTILISED WITH ONE AND OTHER.
 - 12.1. ALL MECHANICAL JOINT RESTRAINTS TO BE WRAPPED WITH APPROVED PETROLEUM TAPE SYSTEM.
13. PROVIDE ADEQUATE SUMP BELOW CONNECTION, AND PUMPING IF REQUIRED, TO PREVENT CONTAMINATION OF NEW WATERMAIN WITH TRENCH GROUND WATER OR ANY OTHER FOREIGN MATTER.
14. ALL WATERMAIN AND SERVICE COMMISSIONING, PRESSURE/LEAKAGE TESTING, DISINFECTION, BACTERIOLOGICAL ANALYSIS AND FLUSHING TO BE SUCCESSFULLY COMPLETED BY THE CONTRACTOR AND ACCEPTED BY THE TOWN OF THE BLUE MOUNTAINS AND CONSULTANT PRIOR TO PERMANENT CONNECTION TO WATER DISTRIBUTION SYSTEM.
- 14.1. CONTRACTOR TO SUBMIT A WATERMAIN COMMISSIONING PLAN TO THE TOWN OF THE BLUE MOUNTAINS AND CONSULTANT AT LEAST TWO WEEKS PRIOR TO CHLORINE RESIDUAL & BACTERIOLOGICAL TESTING.

CONSTRUCTION NOTES

- GENERAL**
1. PRIOR TO CONSTRUCTION, THE CONTRACTOR MUST:
 - 1.1. CHECK AND VERIFY ALL DIMENSIONS AND EXISTING ELEVATIONS WHICH INCLUDES, BUT IS NOT LIMITED TO, THE BENCHMARK ELEVATIONS, EXISTING SERVICE CONNECTIONS AND EXISTING INVERTS.
 - 1.2. OBTAIN ALL UTILITY LOCATES AND REQUIRED PERMITS AND LICENSES.
 - 1.3. VERIFY THAT THE FINISHED FLOOR ELEVATIONS AND EXISTING FLOOR ELEVATIONS (WHICH MAY APPEAR ON THIS PLAN) COMPLY WITH THE FINAL ARCHITECTURAL DRAWINGS.
 - 1.4. CONFIRM ALL DRAWINGS USED FOR CONSTRUCTION ARE OF THE MOST RECENT REVISION.
 - 1.5. REPORT DISCREPANCIES IN EXISTING CONDITION INFORMATION IMMEDIATELY TO THE CONSULTANT.
 2. THE CONTRACTOR SHALL ASSUME ALL LIABILITY FOR DAMAGE TO EXISTING WORKS. DAMAGE SHALL BE RECTIFIED TO THE SATISFACTION OF THE CONSULTANT AND OWNER.
 3. THE CONTRACTOR IS RESPONSIBLE FOR THE TEMPORARY SUPPORT AND/OR RELOCATION OF EXISTING UTILITIES DURING CONSTRUCTION. THE CONTRACTOR SHALL COORDINATE AND COMPLY WITH THE REQUIREMENTS OF ALL UTILITY COMPANIES WHEN CROSSING OR WORKING NEAR THEIR PLANT.
 4. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE ACCURACY OF ALL TEMPORARY BENCHMARKS ESTABLISHED FOR DESIGN PURPOSES, PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL REPORT ANY DISCREPANCIES TO THE CONTRACT ADMINISTRATOR BEFORE COMMENCING WORK.
 5. THE CONTRACTOR SHALL CONTACT THE CONSULTANT 48 HOURS PRIOR TO COMMENCING WORK TO DETERMINE DEGREE OF INSPECTION AND TESTING REQUIRED FOR CERTIFICATION OF UNDERGROUND SERVICE INSTALLATION.
 6. THE RIGHT-OF-WAY (INCLUDING THE BOULEVARD) IS NOT TO BE USED FOR ANY CONSTRUCTION ACTIVITY UNTIL A WORK PERMIT (OR EQUIVALENT) HAS BEEN OBTAINED AS PER THE TOWN OF THE BLUE MOUNTAINS REQUIREMENTS.
 7. ALL WORK ON THE MUNICIPAL RIGHT-OF-WAY WILL BE INSTALLED BY THE SITE CONTRACTOR UPON SUCCESSFUL APPLICATION FOR A WORK PERMIT (OR EQUIVALENT) BY THE CONTRACTOR.
 8. LIMIT CONSTRUCTION TO ACCEPTABLE TIMES WITHIN THE TOWN OF THE BLUE MOUNTAINS NOISE BYLAW. CONSTRUCTION HOURS ARE 7AM TO 7PM MONDAY TO FRIDAY. THE CONTRACTOR WILL REQUIRED TO REQUEST APPROVAL FROM TOWN COUNCIL PRIOR TO COMPLETING ANY WORK OUTSIDE OF REGULAR HOURS AND ON STATUTORY HOLIDAYS.
 9. IF, FOR UNFORESEEN REASONS, THE OWNER AND/OR THEIR REPRESENTATIVE MUST ENCR OACH ONTO PRIVATE LANDS TO UNDERTAKE ANY WORKS, THEY MUST OBTAIN WRITTEN PERMISSION FROM THE ADJACENT PROPERTY OWNERS PRIOR TO ENTERING UPON THE PRIVATE PROPERTY TO PERFORM ANY WORKS. COPIES OF THESE LETTERS OF CONSENT MUST BE SUBMITTED TO THE TOWN OF THE BLUE MOUNTAINS ENGINEERING DEVELOPMENT DIVISION, PRIOR TO ANY WORK BEING PERFORMED. FAILURE TO COMPLY WITH THE ABOVE IS AT THE PROPERTY OWNERS'S & CONTRACTOR'S OWN RISK.

TRAFFIC ACCESS, SAFETY

1. PEDESTRIANS MUST BE ASSURED SAFE PASSAGE AT ALL TIMES. ALL PEDESTRIAN WALKWAYS MUST BE MAINTAINED AS LONG AS POSSIBLE AFTER WHICH TIME IT IS TEMPORARILY REPLACED BY A SUITABLE GRANULAR MATERIAL TO THE SATISFACTION OF THE CONSULTANT AND/OR THE TOWN OF THE BLUE MOUNTAINS.
2. ON STREET PARKING WILL NOT BE PERMITTED FOR ANY CONSTRUCTION VEHICLES OR CONSTRUCTION STAFF. THE CONTRACTOR SHALL PROVIDE ADEQUATE PARKING FACILITIES ON SITE TO SUIT THE NATURE AND LOCATION OF THE WORK.
3. FOR EMERGENCY RESPONSE, CONTRACTOR MUST MAINTAIN CONSTRUCTION ACCESS FREE AND CLEAR OF DEBRIS, MATERIALS, VEHICLES, AND EQUIPMENT.
4. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL TRAFFIC AND SAFETY MEASURES DURING THE CONSTRUCTION PERIOD INCLUDING THE SUPPLY, INSTALLATION, AND REMOVAL OF ALL NECESSARY SIGNALS, DELINEATORS, MARKERS, AND BARRIERS. ALL SIGNS, ETC. SHALL CONFORM TO THE STANDARDS OF THE TOWN OF THE BLUE MOUNTAINS AND THE MTO MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES.

REMOVALS

1. ALL REMOVALS TO BE IN ACCORDANCE WITH OPSS.MUNI 510.

ASPHALT

1. ASPHALT MATERIAL TO BE PROVIDED AS PER OPSS 1150 AND INSTALLED AS PER OPSS 310.
2. WHERE NEW ASPHALT ABUTS EXISTING ASPHALT, EXISTING ASPHALT SHALL BE SAW CUT AND HAVE TACK COAT APPLIED AS PER OPSD 308 TO A CLEAN DRY FACE BEFORE NEW ASPHALT IS PLACED.
3. SUBMIT ONE COPY OF THE PROPOSED ASPHALT MIX DESIGN FOR ANY PAVING MATERIALS DIRECTLY TO THE CONSULTANT A MINIMUM OF TWO WEEKS IN ADVANCE OF SCHEDULED ASPHALT PAVING.
- CONCRETE**
 1. CONCRETE BARRIER CURB TO BE AS PER OPSD 600.110 - 32MPa @ 28 DAYS CONCRETE TO OPSS 353, 7±1.5% AIR ENTRAINMENT, 19mm MAX COURSE AGGREGATE, 60mm MAX SLUMP.
 2. CONCRETE SIDEWALK TO BE AS PER DETAIL ON SHEET C201 - 32MPa @ 28 DAYS CONCRETE TO OPSS 351, 7±1.5% AIR ENTRAINMENT, 19mm MAX COURSE AGGREGATE, 70±20mm SLUMP.
 3. UNSHRINKABLE FILL: TO OPSS 1359, 28-DAY COMPRESSIVE STRENGTH: 0.4 - 0.7 MPa, MAXIMUM 25mm COURSE AGGREGATE SIZE.
4. SUBMIT ONE COPY OF ALL PROPOSED CONCRETE MIX DESIGNS DIRECTLY TO THE CONSULTANT A MINIMUM OF TWO WEEKS IN ADVANCE OF SCHEDULED CONCRETE POURING.

GRANULAR

1. ALL GRANULAR BASE, SUBBASE, SUBGRADE AND BACKFILL TO BE PROVIDED AS PER OPSS.MUNI 1010 AND INSTALLED AS PER OPSS.MUNI 314.
2. COARSE GRANULAR FILL: MATERIAL AS SPECIFIED BELOW; COMPACTED TO 100% STANDARD PROCTOR MAXIMUM DRY DENSITY, UNLESS SPECIFIED OTHERWISE, IN LIFTS NOT EXCEEDING 300mm IN COMPACTED THICKNESS; MOISTURE CONTENT WITHIN PLUS OR MINUS 2% OF THE REQUIREMENTS OF ASTM D698.
 - 2.1. GRANULAR 'B', TYPE 2 TO OPSS.MUNI 1010
3. FINE GRANULAR FILL: MATERIAL AS SPECIFIED BELOW; COMPACTED TO 100% STANDARD PROCTOR MAXIMUM DRY DENSITY, UNLESS SPECIFIED OTHERWISE, IN LIFTS NOT EXCEEDING 150mm IN COMPACTED THICKNESS; MOISTURE CONTENT WITHIN PLUS OR MINUS 2% OF THE REQUIREMENTS OF ASTM D698.
 - 3.1. GRANULAR 'A' TO OPSS.MUNI 1010.

EARTHWORK

1. IN ACCORDANCE WITH THE TOWN OF THE BLUE MOUNTAINS BY-LAW (OR EQUIVALENT), PRE-GRADING OR TREE REMOVAL SHALL OCCUR, IN ADVANCE OF THE FINAL SITE PLAN ENGINEERING ACCEPTANCE, WITHOUT PERMIT. SHOULD THE DEVELOPER OR CONTRACTOR WISH TO PREPARE THE SITE FOR CONSTRUCTION PRIOR TO ENGINEERING ACCEPTANCE, AN APPLICATION FOR A SITE ALTERATION PERMIT (OR EQUIVALENT) MUST BE SUBMITTED BY THE CONTRACTOR TO THE ENGINEERING AND CONSTRUCTION DIVISION FOR REVIEW AND APPROVAL.
2. ANY AREAS WHICH REQUIRE FILL IN EXCESS OF 0.30m ARE SUBJECT TO COMPACTION TESTS AND SUCH TESTS MUST SHOW A MINIMUM COMPACTION OF 98% SPMD AT ALL DEPTHS.
3. RETAINING WALLS TO BE DESIGNED BY OTHERS. THE CONTRACTOR SHALL SUBMIT SHOP DRAWINGS FOR ALL PROPOSED RETAINING WALLS, SIGNED AND SEALED BY A PROFESSIONAL ENGINEER CERTIFIED IN THE PROVINCE OF ONTARIO TO THE CONSULTANT, PRIOR TO CONSTRUCTION. SHOP DRAWINGS TO BE APPROVED BY CONSULTANT IN ADVANCE OF CONSTRUCTION. THE CONTRACTOR SHALL PROVIDE A CERTIFICATE OF COMPLETION (OR EQUIVALENT) COMPLETED BY THE RETAINING WALL DESIGN ENGINEER OR CERTIFIED INSPECTION COMPANY BEFORE ACCEPTANCE OF THE WORK.



TOPSOIL/SOD

1. TOPSOIL TO BE PROVIDED AND INSTALLED AS PER OPSS 802. SOD TO BE PROVIDED AND INSTALLED AS PER OPSS 803.

PAVEMENT MARKING & SIGNS

1. PAVEMENT MARKINGS TO BE LAID OUT AS PER THE DRAWINGS AND CONTRACTOR TO CONTACT CONSULTANT TO REVIEW LAYOUT PRIOR TO PAINTING. ALL PAINT LINES TO BE OF UNIFORM COLOR AND DENSITY WITH SHARP EDGES TO THE SATISFACTION OF THE CONSULTANT.
2. PAVEMENT MARKINGS TO BE:
 - 2.1. ORGANIC SOLVENT BASED TRAFFIC PAINT TO CONFORM TO OPSS 1712 AND APPLIED AS PER OPSS 710
 - 2.1.1. WHITE - C05B 1-GP-12C WHITE 513-301
 - 2.1.2. YELLOW - SHALL MATCH EITHER THE YELLOW COLOUR CHIP OF THE MINISTRY OF TRANSPORTATION ONTARIO OR U.S. FEDERAL 595B, YELLOW 35358
3. ALL EXISTING SIGNS, MAIL BOXES, POSTS, ETC., WHICH MUST BE REMOVED TO ACCOMMODATE CONSTRUCTION SHALL BE SALVAGED AND REINSTATED AS DIRECTED BY THE CONTRACT ADMINISTRATOR IN EQUAL OR BETTER CONDITION. THE CONTRACTOR SHALL MAKE GOOD ANY DAMAGE CAUSED TO SUCH FACILITIES AT HIS OWN EXPENSE. ALL EXISTING TRAFFIC CONTROL SIGNS MUST BE REINSTATED BY THE END OF EACH WORKING DAY. EXISTING STOP CONTROL SIGNS SHALL BE MAINTAINED AT ALL TIMES DURING CONSTRUCTION TO THE SATISFACTION OF THE ROAD AUTHORITY AND THE CONTRACT ADMINISTRATOR.

peopleCare
communities

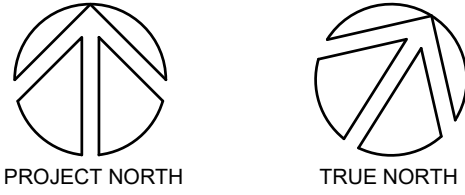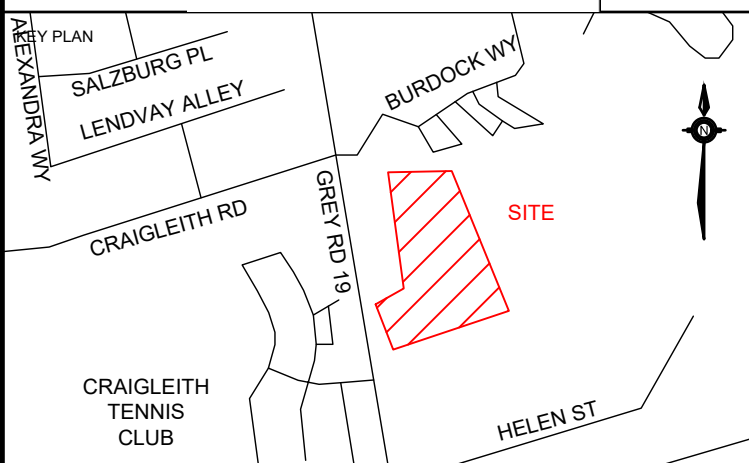

DATE	ISSUANCE	NO.
2026.05.19	ISSUED FOR ZONING BY-LAW AMENDMENT	
2026.06.30	ISSUED FOR SPA	

BENCHMARK

Y = 4930414.0 X = 553826.6 Z = 181.493

CRAIGLEITH CONCRETE CULVERT UNDER HIGHWAY NO. 26, 0.3 KM NORTHWEST OF JUNCTION OF HIGHWAY NO. 26 WITH BLUE MOUNTAIN PARK ROAD, TABLET IN SOUTH FACE OF CULVERT AT SOUTH END, 60 CM BELOW TOP AND 42 CM EAST OF WEST EDGE OF CULVERT.

CLIENT

TOWN OF BLUE MOUNTAIN LTC INC.
(peopleCare)
595 Parkside Dr Suite 2, Waterloo, ON

PROJECT

LONG-TERM CARE
DEVELOPMENT
TOWN OF THE BLUE MOUNTAINS


TITLE

NOTES

WALTERFEDY

TORONTO | CALGARY | KITCHENER | HAMILTON













800.685.1378 walterfedy.com

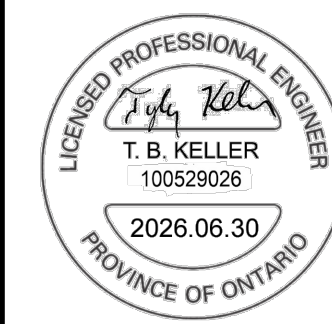

REPRODUCTION OR DISTRIBUTION FOR PURPOSES OTHER THAN AUTHORIZED BY WALTERFEDY, A PART OF WF GROUP, IS FORBIDDEN. CONTRACTORS SHALL VERIFY AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS ON THE JOB AND REPORT ANY VARIATIONS FROM THE DIMENSIONS AND CONDITIONS SHOWN ON DRAWINGS TO WALTERFEDY, A PART OF WF GROUP. - DO NOT SCALE THIS DRAWING -
COPYRIGHT © 2025 WalterFedy, A Part of WF Group Inc.

SCALE	SHEET NO.:
DATE: 2026-06-26	
PROJECT NO.: 2026-0316-10	
DRAWN BY: LH	
CHECKED BY: TK	

C501

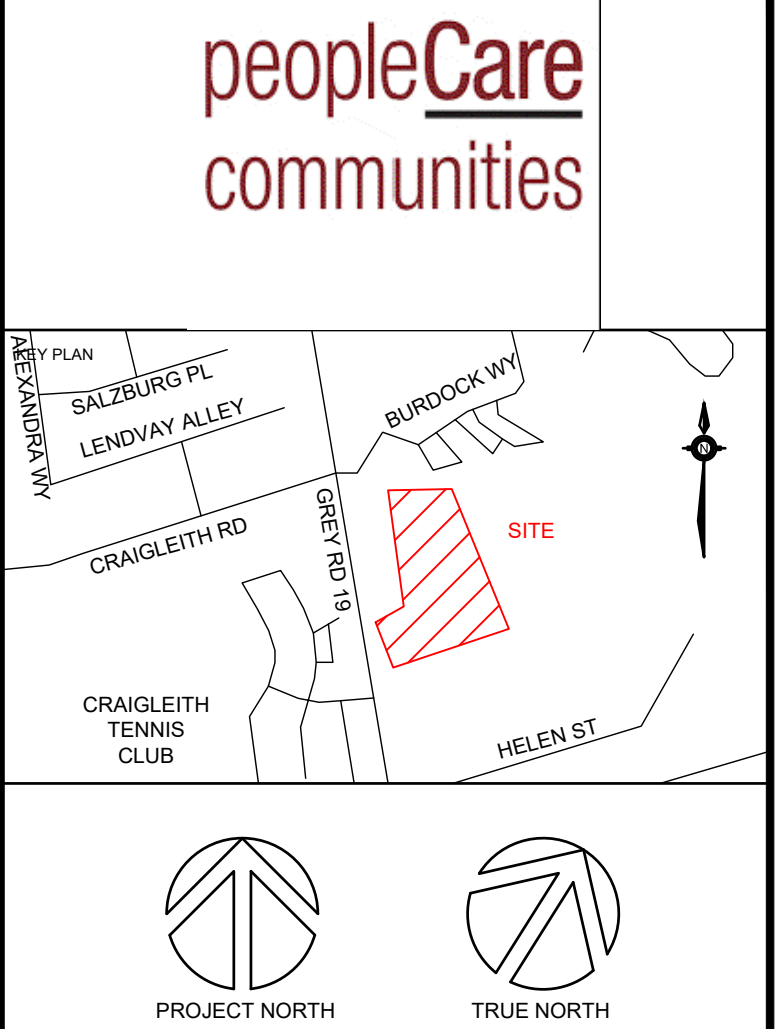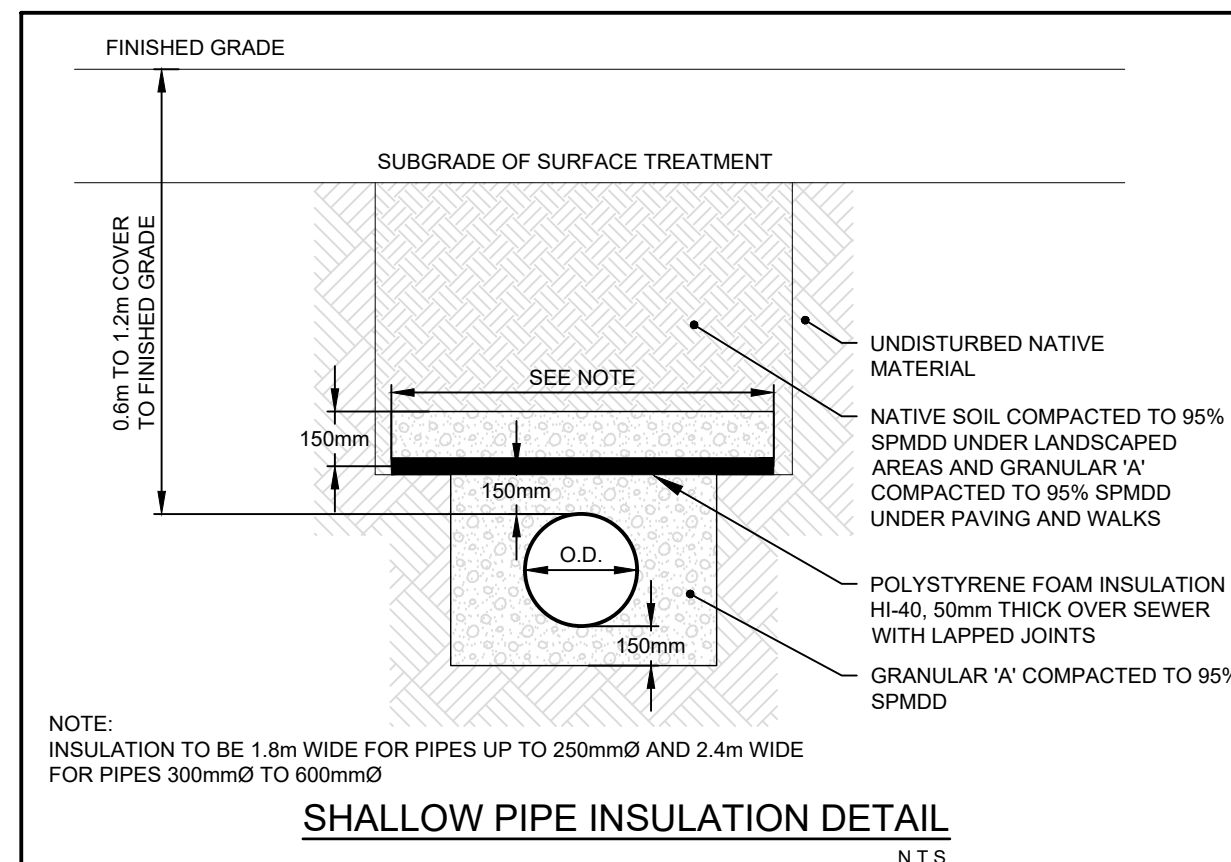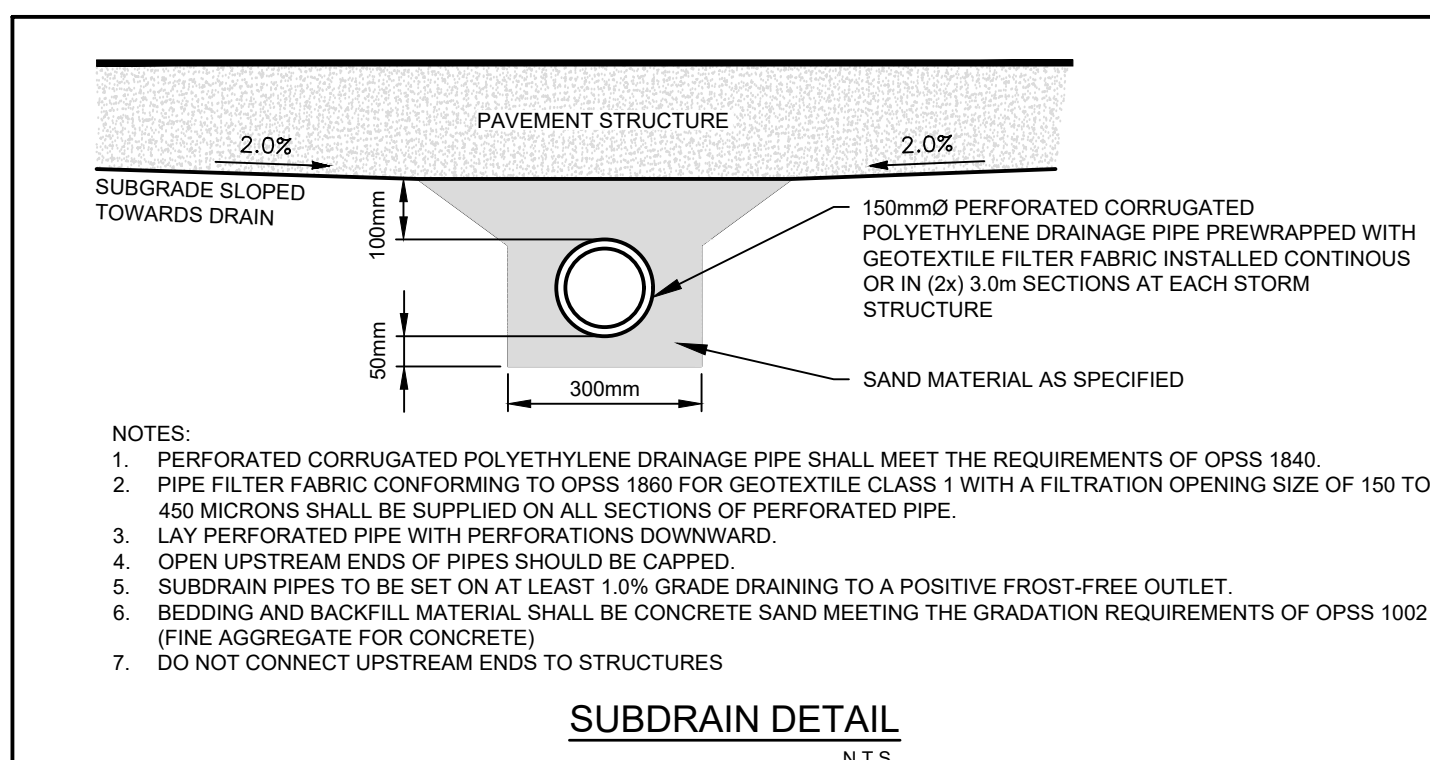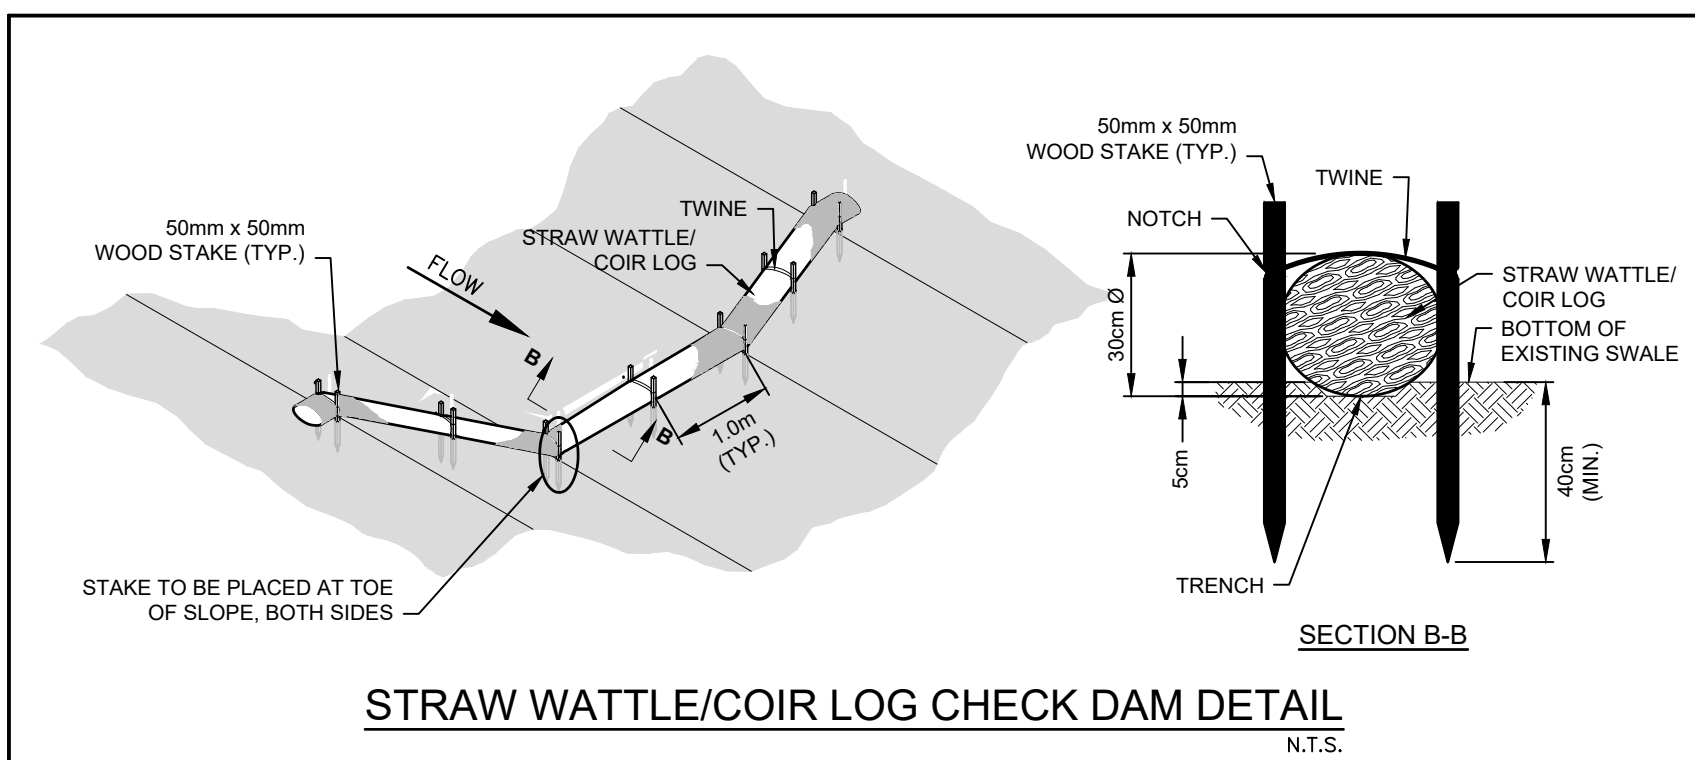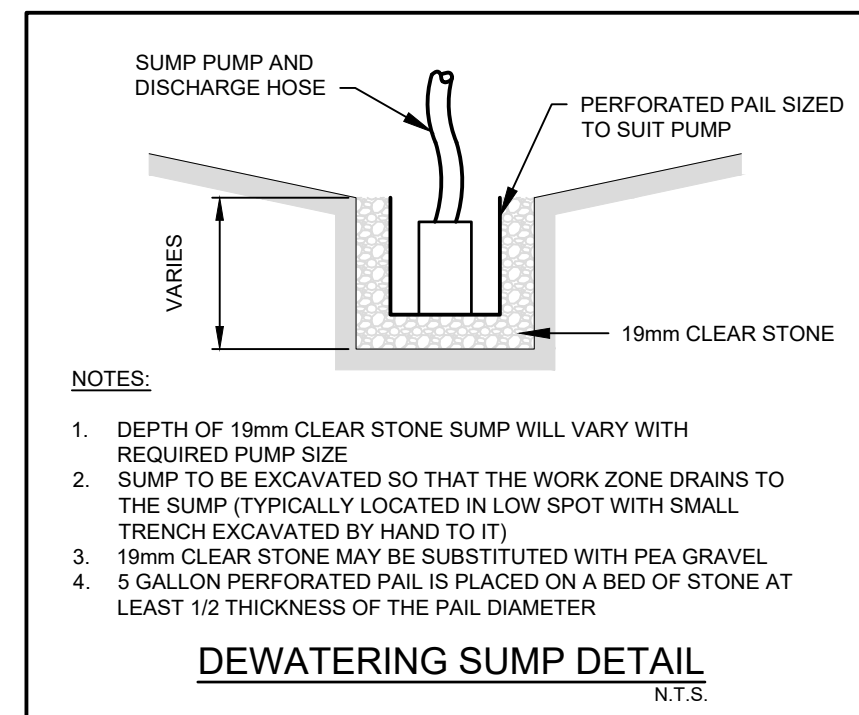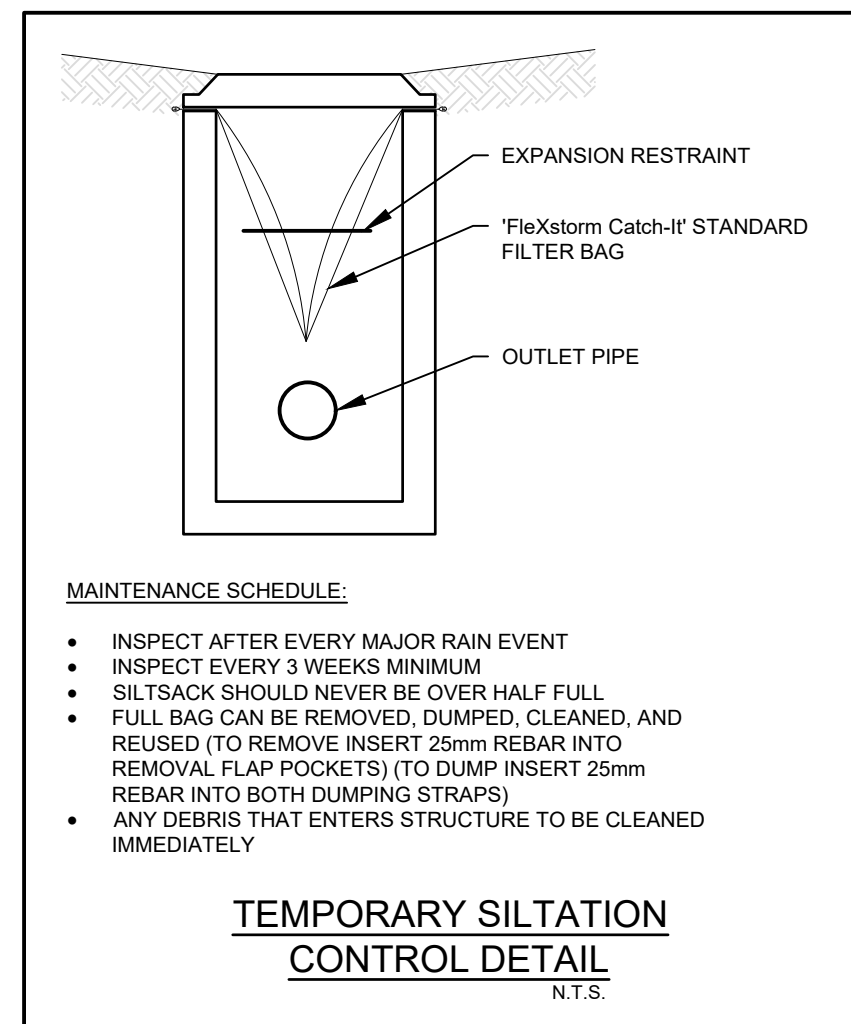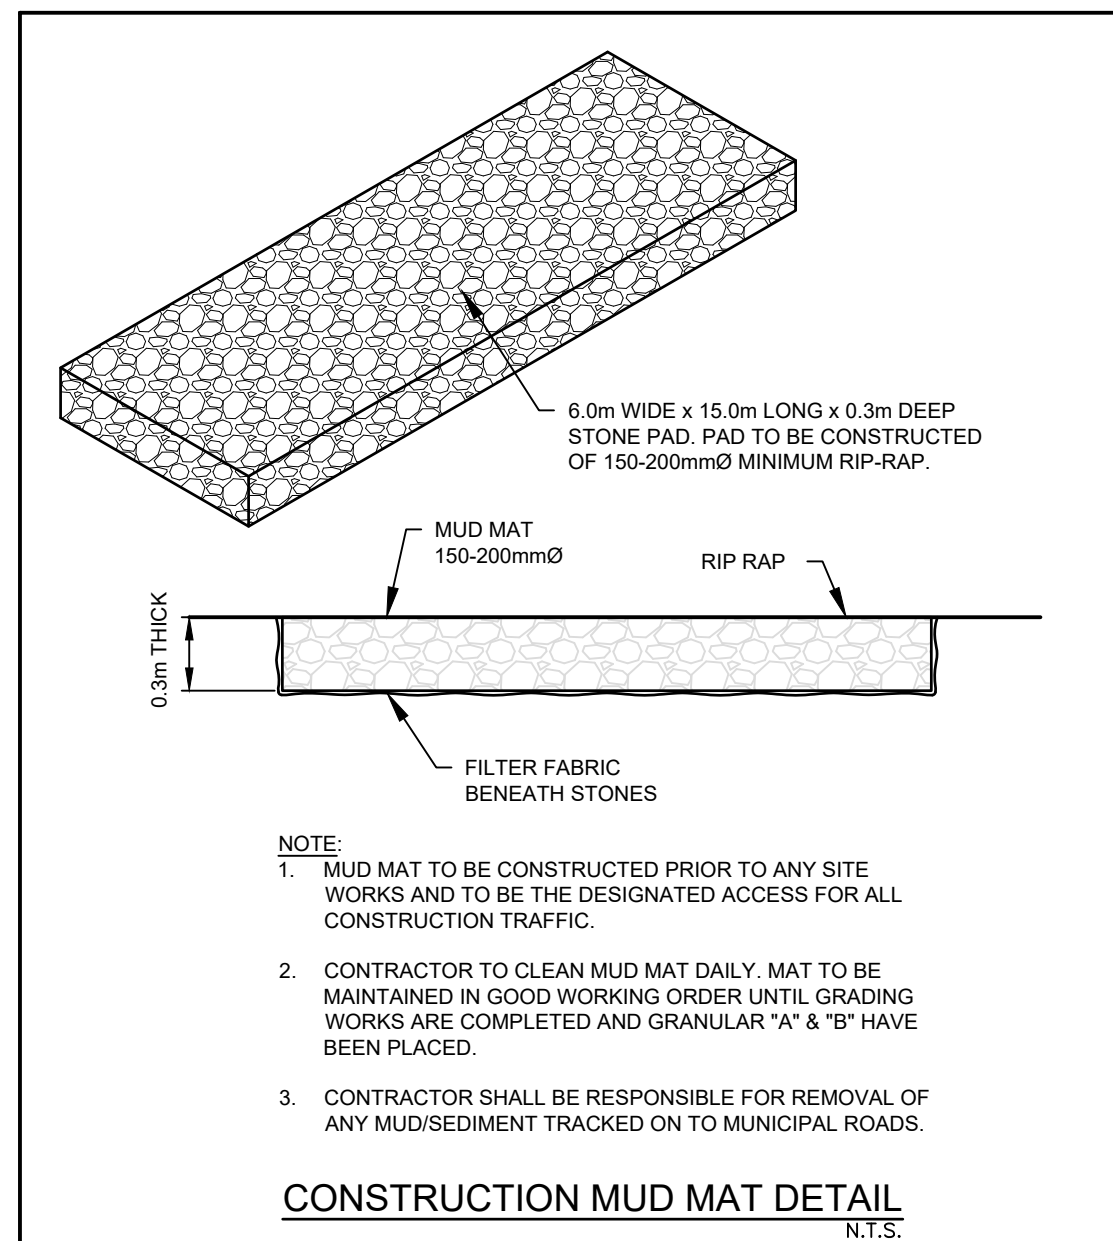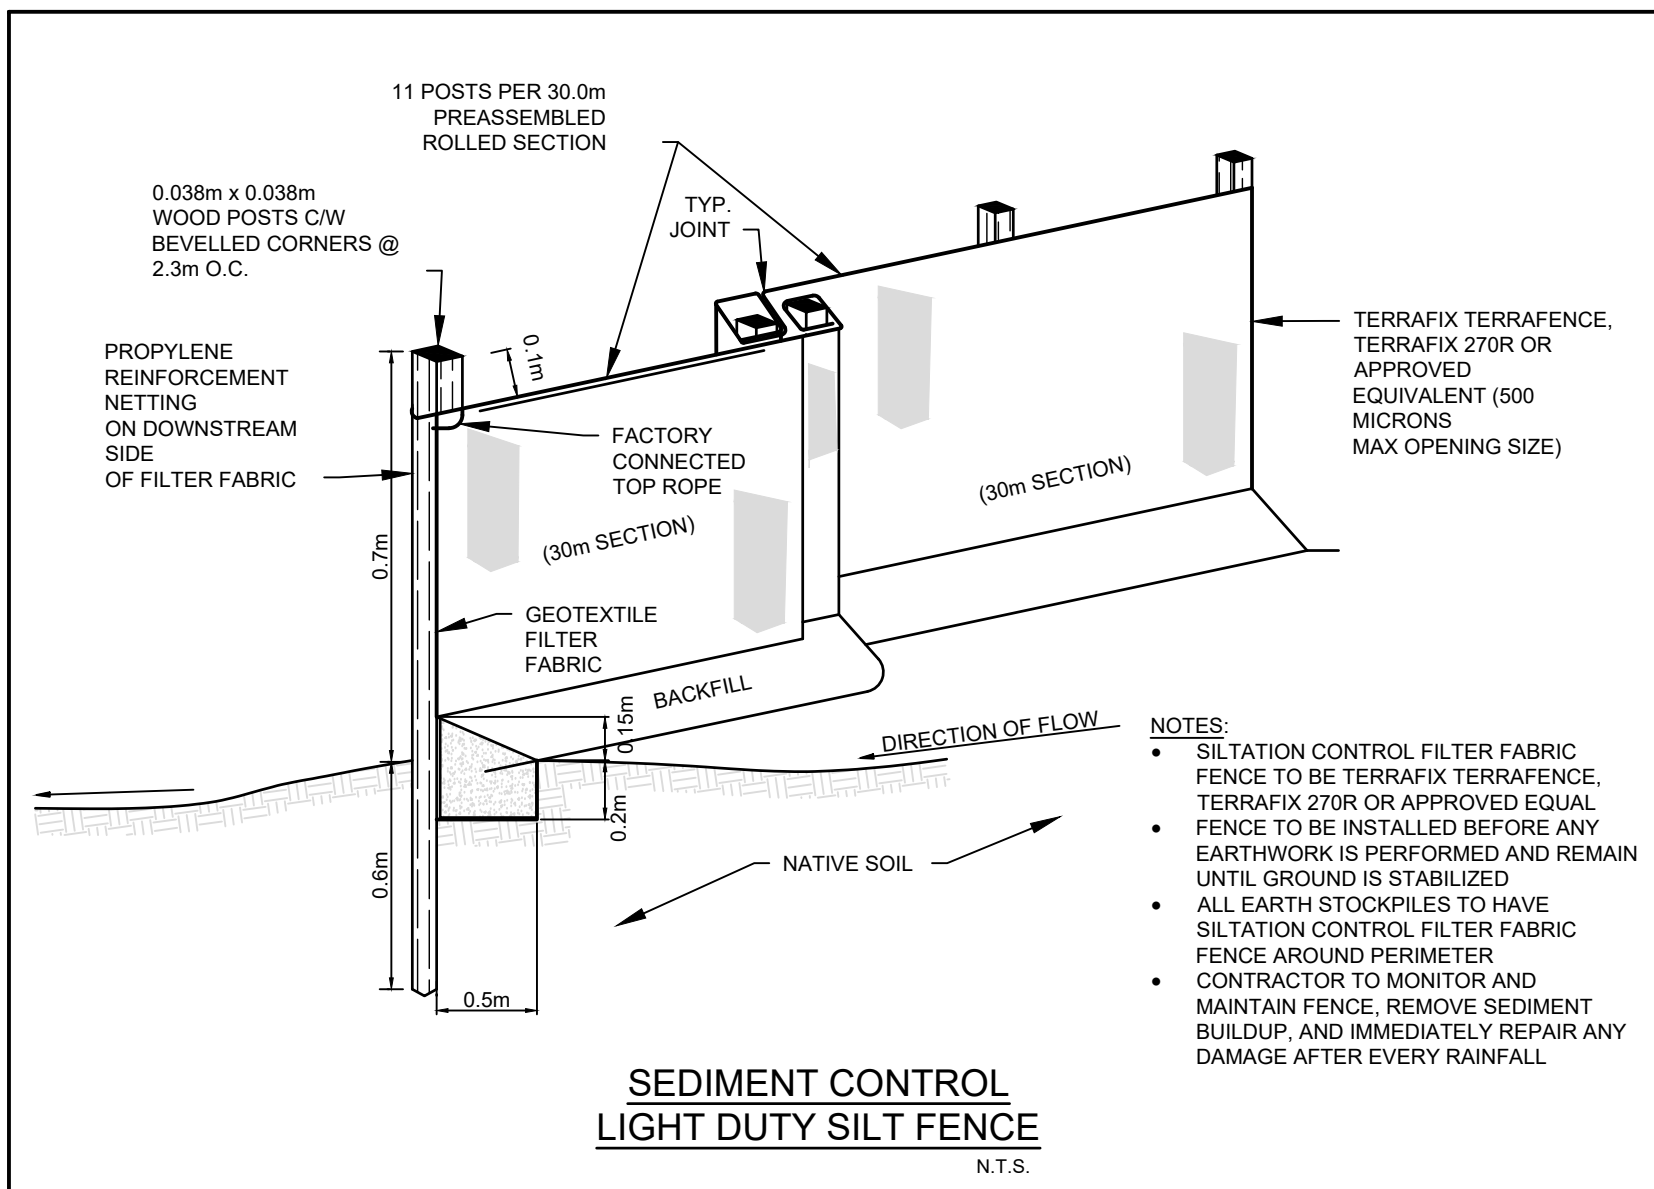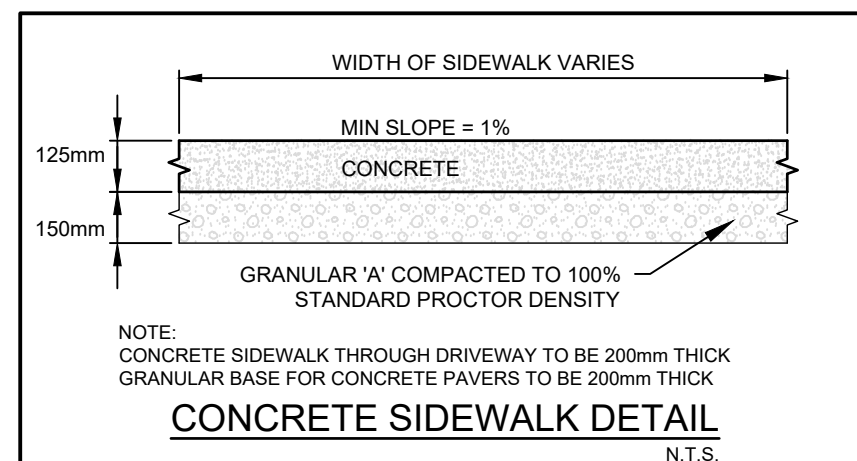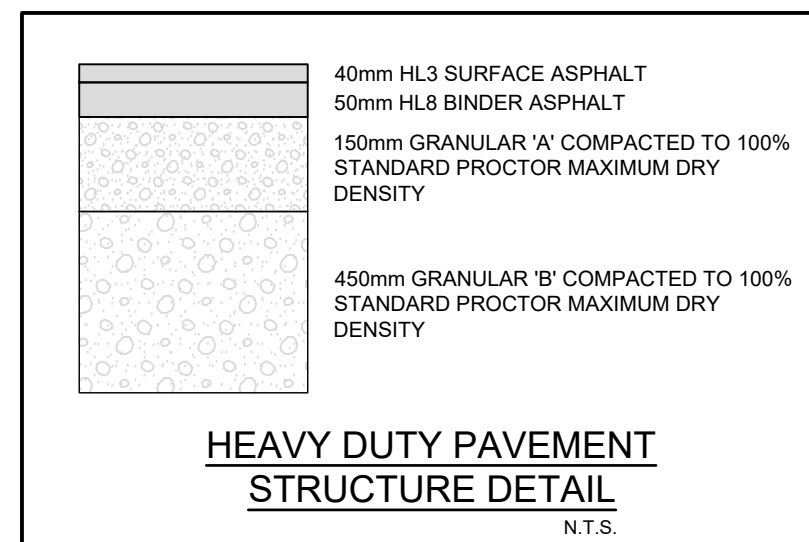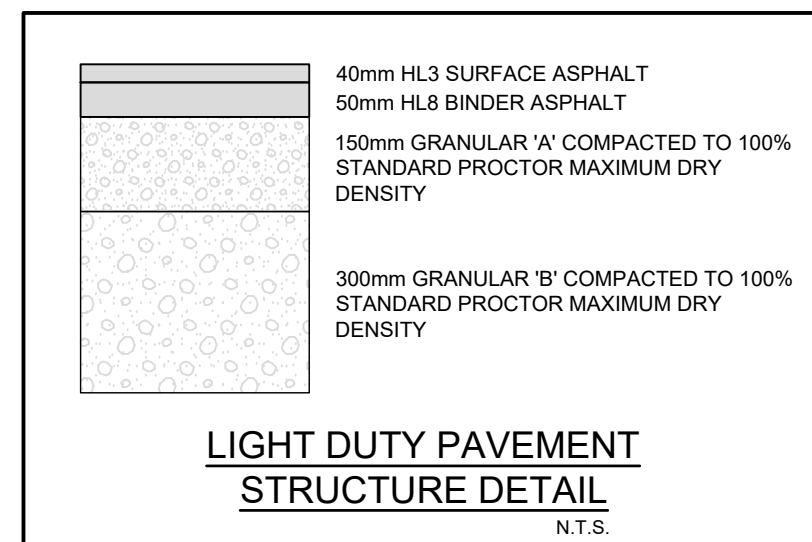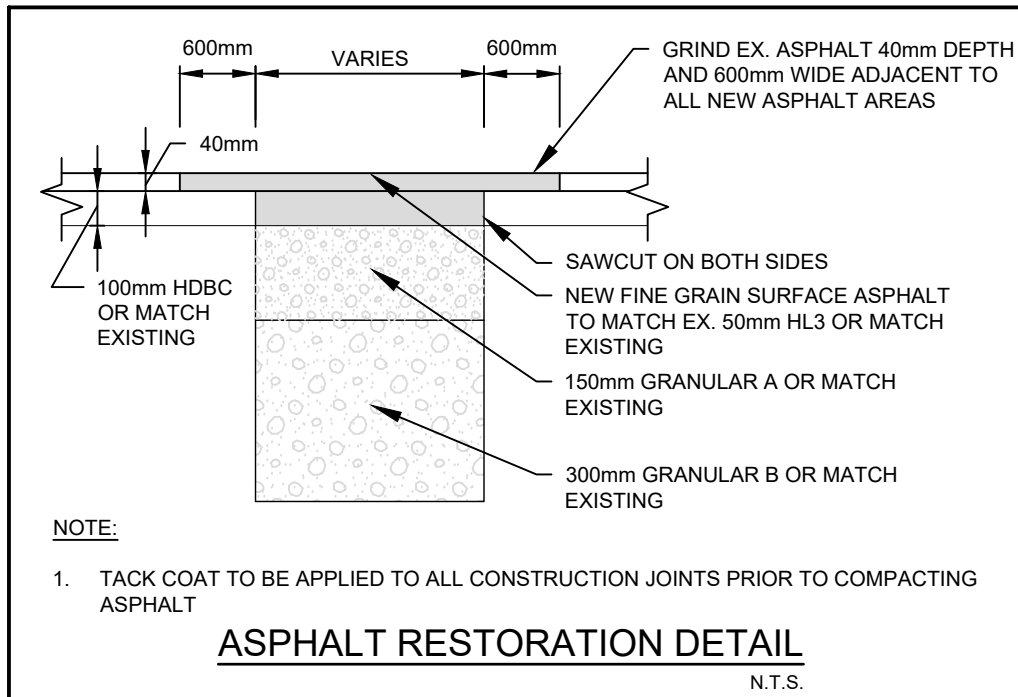

DATE	ISSUANCE	NO.
2026.05.19	ISSUED FOR ZONING BY--LAW AMENDMENT	
2026.06.30	ISSUED FOR SPA	

BENCHMARK

Y = 4930414.0 X = 553826.6 Z = 181.493

CRAIGLEITH CONCRETE CULVERT UNDER HIGHWAY NO. 26, 0.3 KM NORTHWEST OF JUNCTION OF HIGHWAY NO. 26 WITH BLUE MOUNTAIN PARK ROAD, TABLET IN SOUTH FACE OF CULVERT AT SOUTH END, 60 CM BELOW TOP AND 42 CM EAST OF WEST EDGE OF CULVERT.

CLIENT

TOWN OF BLUE MOUNTAIN LTC INC.
(peopleCare)
595 Parkside Dr Suite 2, Waterloo, ON

PROJECT


LONG-TERM CARE
DEVELOPMENT
TOWN OF THE BLUE MOUNTAINS

TITLE	2026-0316-10 DET PLT - C502
-------	-----------------------------

WALTERFEDY

TORONTO | CALGARY | **KITCHENER** | HAMILTON

800.685.1378 walterfedy.com

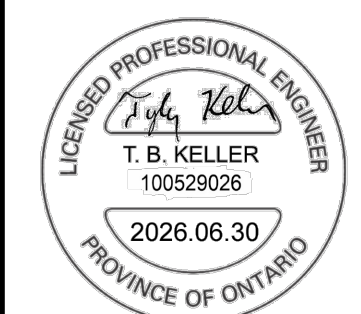

REPRODUCTION OR DISTRIBUTION FOR PURPOSES OTHER THAN AUTHORIZED BY WALTERFEDY, A PART OF WF GROUP, IS FORBIDDEN. CONTRACTORS SHALL VERIFY AND BE RESPONSIBLE FOR ALL DIMENSIONS AND CONDITIONS ON THE JOB AND REPORT ANY VARIATIONS FROM THE DIMENSIONS AND CONDITIONS SHOWN ON DRAWINGS TO WALTERFEDY, A PART OF WF GROUP. - DO NOT SCALE THIS DRAWING -

SCALE:	SHEET NO.:
DATE: 2026-06-26	
PROJECT NO.: 2026-0316-10	
DRAWN BY: LH	
CHECKED BY: TK	

APPENDIX A

Sanitary Design Calculations

Project: peopleCare - Blue Mountains		Design Data			SANITARY SEWER DESIGN CALCULATIONS						WALTERFEDY					
Project No: 2024-1065-10																
Date: 2026-06-26																
Designed By: TK Checked By:																
		Min. Velocity	0.6	m/s												
		Max. Velocity	3.0	m/s												
		Manning's 'n'	0.013													
		Infiltration	0.28	l/s/ha												
		Residential			Long Term Care											
					Harmon			Harmon								
					350	L/d/c		450	L/bed/d							
					Long Term Care			Cumulative			Infiltration		Design Data			
					Beds			Peak Factor			Total		Q _{FULL}			
					Area			Equivalent Population			Area		V _{FULL}			
					(ha)						(ha)		(m/s)			

APPENDIX B

**Domestic Water Demand
FUS Fire Demand**

REQUIRED DOMESTIC FLOW

ONTARIO BUILDING CODE / MECP / TOWN OF THE BLUE MOUNTAINS GUIDELINES

WALTERFEDY

Project	peopleCare - Blue Mountains
Project #	2026-0316-10
Designer	TK
Address	peopleCare - Town of The Blue Mountains
Description	Domestic Water Demand

OBC DEMAND FOR LTC											
Building Description (Proposed Conditions)	Area (ha)	Units	Persons/U nit	Population	Beds	Demand	Max Daily Peak Factor	Max Hourly Peak Factor	Average Demand (L/s)	Max Daily Demand (L/s)	Max Hourly Demand (L/s)
Proposed Long Term Care Facility - 192 Beds	N/A	N/A	N/A	N/A	192	450 L/bed/day	4.54	6.84	1.00	4.54	6.84

REQUIRED FIRE FLOW**WALTERFEDY**

Water Supply for Public Fire Protection (FUS 2020)

Project peopleCare - Blue Mountains
Project # 2026-0316-10
Designer TK
Address Town of The Blue Mountains
Description Proposed Fire Demand - LTC

$$F = 220 \times C \times \sqrt{A}$$

F = Required fire flow (LPM)

C = Coefficient related to type of construction

A = Total floor area (including all storeys but excluding any basement levels at least 50% below grade)

Type of Construction Non-Combustible Construction C = 0.8
Description Unprotected Metal Structural Components, Masonry or Metal Walls. All Structural Members are Non-Combustible but does not qualify as Fire-Resistive

Total Floor Area 3761 m²
Storeys 3
Fire Resistant Building? NO
Vertical Openings and Exterior Vertical Communications protected with minimum one (1) hr rating? NO

Area 7627.5 m²
Description Area of two largest floors + 50% of each of the floors above it
First Floor = 3127. Floors 2-3 = 3127
Required Fire Flow 15000 L/min

Occupancy Charge Limited-Combustible Contents
Fire Flow Reduction -15% OR -2250 L/min
Required Fire Flow 12750 L/min

Automated Sprinkler Protection YES
Designed to NFPA 13 Standard YES -30%
Standard Water Supply to Sprinklers and Standpipes YES -10%
Fully Supervised System YES -10%
Fire Flow Adjustment -6375 L/min

Exposure 1 (North) Distance 24 m Charge 10%
Description

Exposure 2 (South) Distance 0 m Charge 0%
Description

Exposure 3 (East) Distance 22 m Charge 10%
Description Proposed rental development east from the southeastern edge of the ltc.

Exposure 4 (West) Distance 0 m Charge 0%
Description

Total Exposure Charge 20%
Fire Flow Adjustment 2550 L/min

Total Required Fire Flow 9000 L/min
Total Required Fire Flow 2378 U.S. GPM
Total Required Fire Flow 150 L/s

APPENDIX C

Storm Sewer Design Sheet

WALTERFEDY																				
Project:	Town of The Blue Mountains - LTC							Storm Parameters		STORM SEWER DESIGN CALCULATIONS										
Project No:	2026-0316-10							A	481.128											
Date:	26-Jun-26							B	0	Design Frequency	5	Maximum Permitted Full Flow Velocity (m/s)						6		
Designed By:	LH	Checked By:	TK					C	0.699	Manning's 'n'	0.013	Minimum Permitted Full Flow Velocity (m/s)						0.6		
Catchment	Pipe Data			Drainage Area				Time		Design Flow		Pipe Flow								Remarks
	From	To	Length (m)	Area (ha)	C	AC	ΣAC	Inlet (min)	System (min)	I (mm/hr)	Q (L/s)	Diameter (mm)	Slope (%)	Q _{FULL} (L/s)	Q/Q _{FULL}	V _{FULL} (m/s)	V (m/s)	Flow Time (min)		
1	DICB1	MH3	21.3	0.2	0.3	0.060	0.060	10	10	105.84	17.64	250	1.00%	59.47	0.30	1.21	1.06	0.34	No Surcharge	
2	BLDG1	CBMH2	5.6	0.0633	1	0.063	0.063	10	10	105.84	18.61	250	1.00%	59.47	0.31	1.21	1.07	0.09	No Surcharge	
3	CBMH2	MH3	21.3	0.017	0.5	0.009	0.072		10.09	105.20	20.98	250	0.50%	42.05	0.50	0.86	0.86	0.41	No Surcharge	
	MH3	CBMH7	21.2	0	0	0.000	0.132		10.50	102.28	37.45	300	0.50%	68.38	0.55	0.97	0.99	0.36	No Surcharge	
5	CB5	CBMH6	21.3	0.021	0.5	0.011	0.011	10	10	105.84	3.09	250	1.00%	59.47	0.05	1.21	0.64	0.56	No Surcharge	
6	CBMH6	CBMH7	36	0.02	0.5	0.010	0.021		10.56	101.91	5.80	250	0.50%	42.05	0.14	0.86	0.60	1.00	No Surcharge	
4	CB4	CBMH7	6.9	0.054	0.9	0.049	0.049	10	10	105.84	14.29	250	1.00%	59.47	0.24	1.21	1.00	0.12	No Surcharge	
7	CBMH7	CBMH9	40.5	0.21	0.9	0.189	0.390		11.55	95.68	103.62	375	0.40%	110.89	0.93	1.00	1.14	0.59	No Surcharge	
9	CB8	CBMH9	14.5	0.043	0.9	0.039	0.039	10	10	105.84	11.38	250	1.00%	59.47	0.19	1.21	0.93	0.26	No Surcharge	
8	BLDG 2	CBMH9	12.2	0.326	1	0.326	0.326	10	10	105.84	95.84	300	2.00%	136.76	0.70	1.93	2.09	0.10	No Surcharge	
10	CBMH9	CBMH11	24.2	0.08	0.9	0.072	0.827		12.15	92.39	212.15	450	0.65%	229.86	0.92	1.45	1.64	0.25	No Surcharge	
11	DDICB 10	CBMH11	23.7	0.88	0.5	0.440	0.440	10	10	105.84	129.36	375	1.00%	175.33	0.74	1.59	1.74	0.23	No Surcharge	
12	CBMH11	MH12	14.8	0.26	0.9	0.234	1.501		12.39	91.11	379.77	600	0.50%	434.17	0.87	1.54	1.73	0.14	No Surcharge	
13	DICB13	DICB14	68	0.06	0.25	0.015	0.015	10	10.00	105.84	4.41	250	1.00%	59.47	0.07	1.21	0.71	1.60	No Surcharge	
14	DICB14	MH12	14.8	0.066	0.25	0.017	0.032		11.60	95.42	8.35	250	0.50%	42.05	0.20	0.86	0.67	0.37	No Surcharge	
	MH12	CBMH 323	34.7	0	0	0.000	1.532		12.53	90.38	384.66	600	0.50%	434.17	0.89	1.54	1.73	0.33	No Surcharge	